

advanced FLOW engineering

Instruction Manual P/N: 46-70072

Make: **GM** Model: **Silverado HD/ Sierra HD** Year: **01-12** Engine: **V8-6.6L (td)**



- Please read the entire instruction manual before proceeding.
- Ensure all components listed are present.
- If you are missing any of the components, call customer support at 951-493-7100.
- Ensure you have all necessary tools before proceeding.
- Do not attempt to work on your vehicle when the engine is hot.
- Disconnect the negative battery terminal before proceeding.
- Retain factory parts for future use.

Label	Qty.	Description	Part Number
A1	1	Transmission Pan	05-60069 (Machined Fins)
B	1	1/8" Plug	05-50029
C	1	3/4" Plug	03-50222
D	1	O-Ring	03-60090
E	12	Socket Head Cap Screws	03-50231
F	12	Flat Washers	03-50228

Installation will require the following tools:

Oil Drain Pan (12 QT. Capacity Minimum), 15mm & 13mm Socket, 1/2" drive Ratchet, 3/16" Allen wrench
6mm Long reach Allen, Teflon Pipe Tape


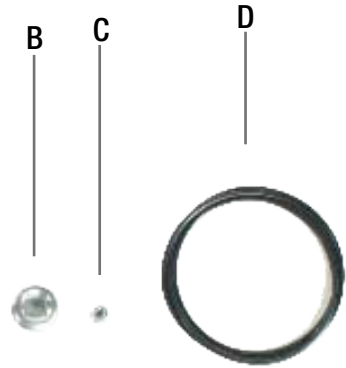




Figure A

Refer to Figure A for steps 1-2

Step 1: Park your truck on level ground and apply the parking brake.

Step 2: Position a drain pan under the transmission pan.



Figure B

Refer to Figure B for steps 3-4

Step 3: Begin by removing drain plug using a 15mm socket and drain the transmission fluid.

Step 4: Reinstall drain plug once you have drained all of the fluid.



Refer to Figure C for step 5

Step 5: Loosen the transmission pan bolts with a 13mm socket and remove the stock pan.



Figure D

Refer to Figure D for step 6

Step 6: Gently remove the stock oil filter pick-up and ensure the o-ring gasket did not come off the neck of the filter and stay in the transmission.



Figure E

Refer to Figure E for step 7

Step 7: Install the Allison A1000 Deep Pan Sump Filter, part number 29537966. Failure to do so will cause transmission failure.

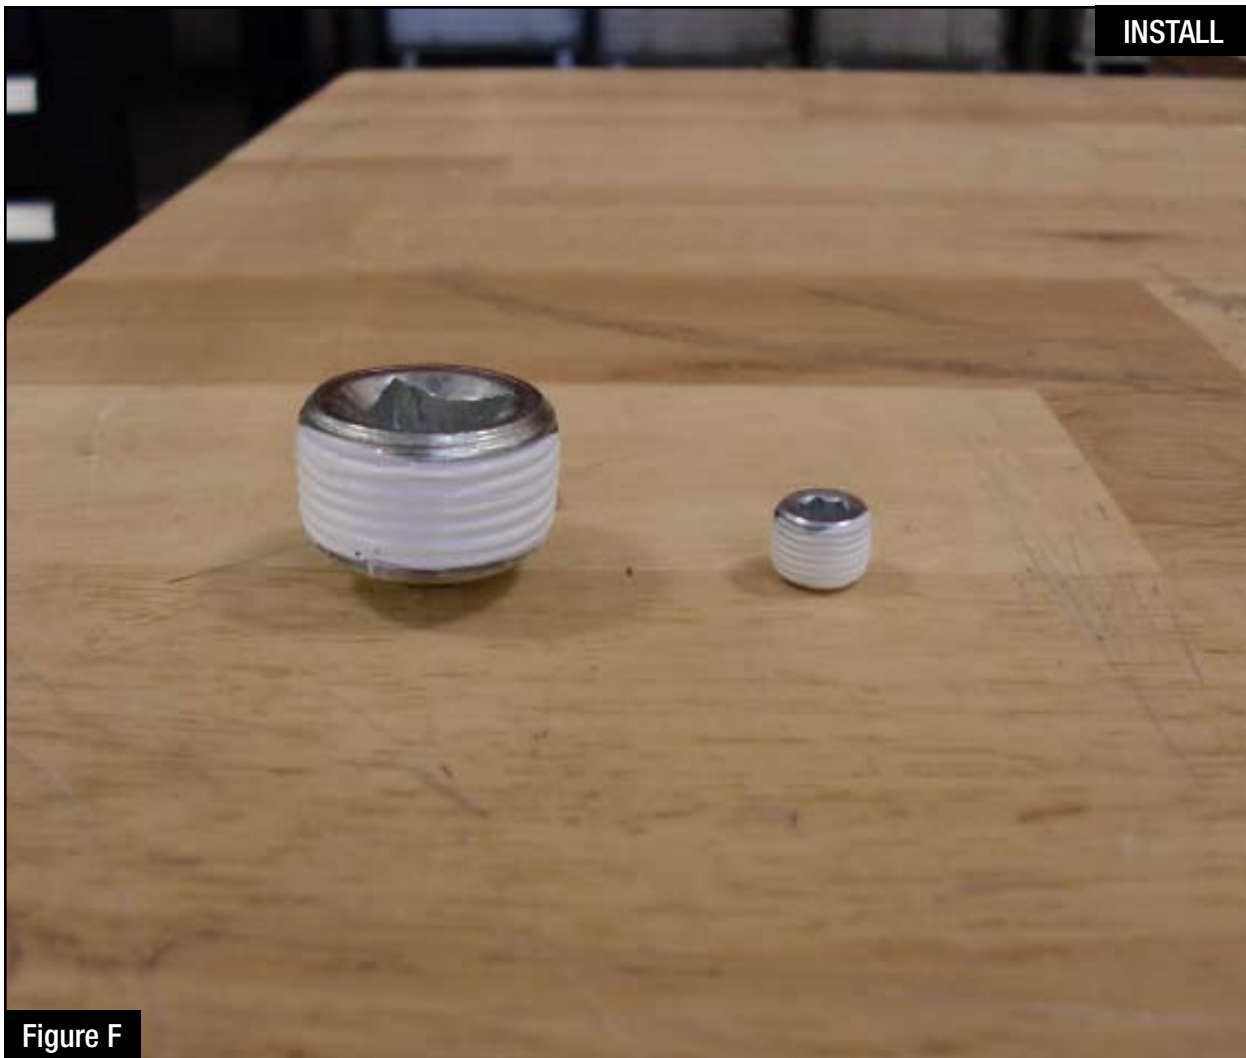


Figure F

Refer to Figure F for step 8

Step 8: Apply Teflon tape to the threads of the drain plug and temperature sensor plug included.

**Figure G****Refer to Figure G for step 9**

Step 9: If you have a temperature sensor skip this step. Install the 1/8" NPT plug using a 3/16" allen wrench on the back of the aFe transmission pan (torque to 3 ft.-lbs.).

INSTALL



Figure H

Refer to Figure H for step 10

Step 10: Install the drain plug using a 1/2" drive ratchet on the bottom of aFe transmission pan (torque to 50 ft.-lbs.).



Figure I

Refer to Figure I for step 11

Step 11: Insert the o-ring into the o-ring groove.



Figure J

Refer to Figure J for steps 12-14

- Step 12: Install the aFe transmission pan by aligning the screw holes and threading all the allen cap screws in a few turns. Continue around the bolt pattern until all 12 screws and washers are installed and finger tight.
- Step 13: Using a 6mm long reach hex bit and a 3/8 drive torque wrench, torque the allen cap screws to 15 ft.-lbs. in a cross tight pattern.
- Step 14: If you have a temperature sensor it should be installed now.

**Figure K****Refer to Figure K for steps 14-15**

Step 14: Refill the aFe transmission pan using new Dexron VI transmission fluid. Keep in mind the aFe transmission pan holds about 3.5 quarts more than stock.

Step 15: Reinstall the transmission dip stick and check the transmission fluid level per the manufacturer's instructions. Failure to do so could cause transmission damage.

Page left blank intentionally



Page left blank intentionally

Page left blank intentionally



aFe Power Hat



P/N: 40-10114 S/M
P/N: 40-10115 L/XL

aFe Key Chain



P/N: 40-10103

Warranty

General Terms:

- aFe warrants their products to be free from manufacturer's defects due to workmanship and material.
- This warranty applies only to the original purchaser of the product and is non-transferrable.
- Proof of purchase of the aFe product is required for all warranty claims.
- Warranty is valid provided aFe instructions for installation and/or cleaning were properly followed.
- Proper maintenance with regular inspections of product is required to insure warranty coverage.
- Damage due to improper installation, abuse, unauthorized repair or alteration is not warranted.
- Incidental or consequential damages or cost, including installation and removal of part, incurred due to failure of aFe product is not covered under this warranty.
- All warranty is limited to the repair and/or replacement of the aFe part. To request Return Goods Authorization ("RGA"), email RGA@afepower.com or call (951)493-7100. Upon receipt of the RGA, you must return the product to the address provided in the RGA, freight prepaid and accompanied with a dated proof of purchase and the RGA. Upon receipt of the defective product and upon verification of proof of purchase, aFe will either repair or replace the defective product within a reasonable time, not to exceed thirty days.

Product Category	P/N Prefix	Warranty duration
Direct OE Replacement Filters	10, 11, 30, 31, 71, 73	Life of the vehicle
Racing Filters	18	1 year
Universal	21, 24, 72	2 years
Air Intake Systems	50, 51, 54, 55, 75	2 years
Exhaust Systems	49	2 years
Intercoolers & Intercooler Tubes	46-2	2 years
Intake Manifolds	46-1	2 years
Differential Cover/Transmission Pan	46-7	Life of the vehicle
Exhaust Manifolds	46	2 years
Throttle Body Spacers	46-3	2 years
Fluid Filters	44	90 days
Pre-Filters	28	2 years
Heavy Duty OE Replacement	70	2 years
PowerSports OE Replacement	81, 87	2 years
PowerSports Intake Systems	85	2 years

No other warranty expressed or implied applies nor is any person or advanced FLOW engineering authorized to assume any other warranty. Some States do not allow the exclusion or limitation of incidental or consequential damages or do not allow limitations on how long an implied warranty lasts, so the above limitations or exclusions may not apply to you. This warranty gives you specific legal rights, and you may also have other rights which vary from State to State.



advanced FLOW engineering, inc.

252 Granite Street Corona, CA 92879

TEL: 951.493.7100 • TECH: 951.493.7100 x23

E-Mail: Tech@aFepower.com