


INSTALLATION INSTRUCTIONS

Front Brush Guard: for Polaris RZR[®] XP 1000

| Item | Description | Qty |
|------|---------------|-----|
| A | Upper | 1 |
| B | Lower | 1 |
| C | 3500 Fairlead | 1 |
| D | Tube Clamp | 2 |
| E | Light Mount | 2 |

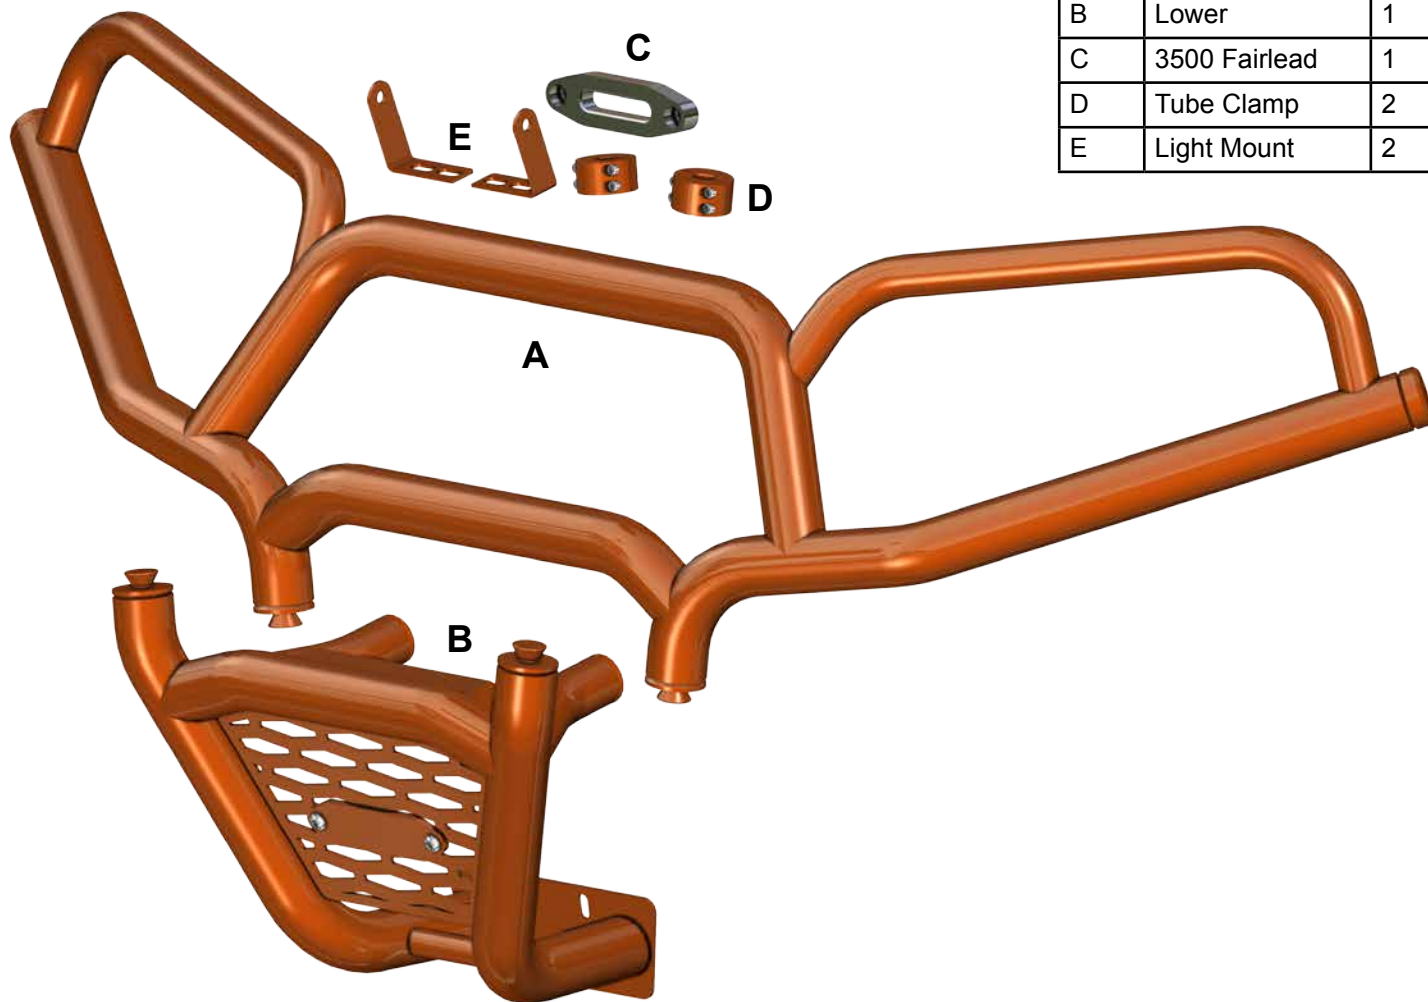

(kit contents continue on following page)

Read instructions and view illustrations before beginning.

Need help with your installation?



sales@superatv.com



www.superatv.com



1-812-574-7777



8:00am - 9:00pm EST M-Th
8:00am - 7:00pm EST Friday
9:00am - 2:00pm EST Saturday

*Thank You
For Choosing*

SUPERATV.COM[®]

Liability Statement


SuperATV's[®] products are designed to best fit user's ATV/UTV under stock conditions. Adding, modifying, or fabricating any factory or aftermarket parts will void any warranty provided by SuperATV[®] and is not recommended. SuperATV's[®] products could interfere with other aftermarket accessories. If user has aftermarket products on machine, contact SuperATV[®] to verify that they will work together.

Although SuperATV[®] has thousands of satisfied customers, user should be aware that installing lift kits, long travel, or suspension kits, tires, etc. will change the ride of machine and may increase maintenance and part wear. Operating any off-road machine while, or after, consuming alcohol and/or drugs increases risk of bodily harm or death. No warranty or representation is made as to this product's ability to protect user from severe injury or death. SuperATV[®] urges operators and occupants to wear a helmet and appropriate riding gear at all times.

By purchasing and installing SuperATV[®] products, user agrees that should damages occur, SuperATV[®] will not be held responsible for loss of time, use, labor fees, replacement parts, or freight charges. SuperATV[®], nor any 3rd party, will not be held responsible for any direct, indirect, incidental, special, or consequential damages that result from any product purchased from SuperATV[®]. The total liability of seller to user for all damages, losses, and causes of action, if any, shall not exceed the total purchase price paid for the product that gave rise to the claim.


SuperATV[®] will warranty only parts provided by SuperATV[®]. Any damage or problems with OEM housings, bearings, seals, or other manufacturers' products will not be covered by SuperATV[®]. SuperATV[®] parts and products are not warranted if item was not installed properly, misused, or modified.

(kit contents continued)

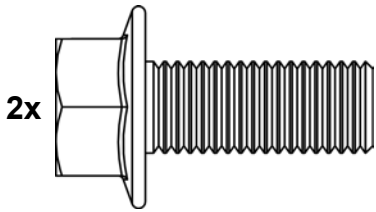


2x

M12-1.75 x 30mm Lg. FHCS



4x

M10-1.50 Nylock Nut




3x

M8-1.25 x 25mm Lg. FHCS




3x

M8-1.25 Nylock Nut




4x

M10-1.50 x 20mm Lg. FHCS



2x

M12 Lock Washer




4x


Spacer

When assembling do not tighten hardware completely unless noted.


Reference only; do not assemble at this time.

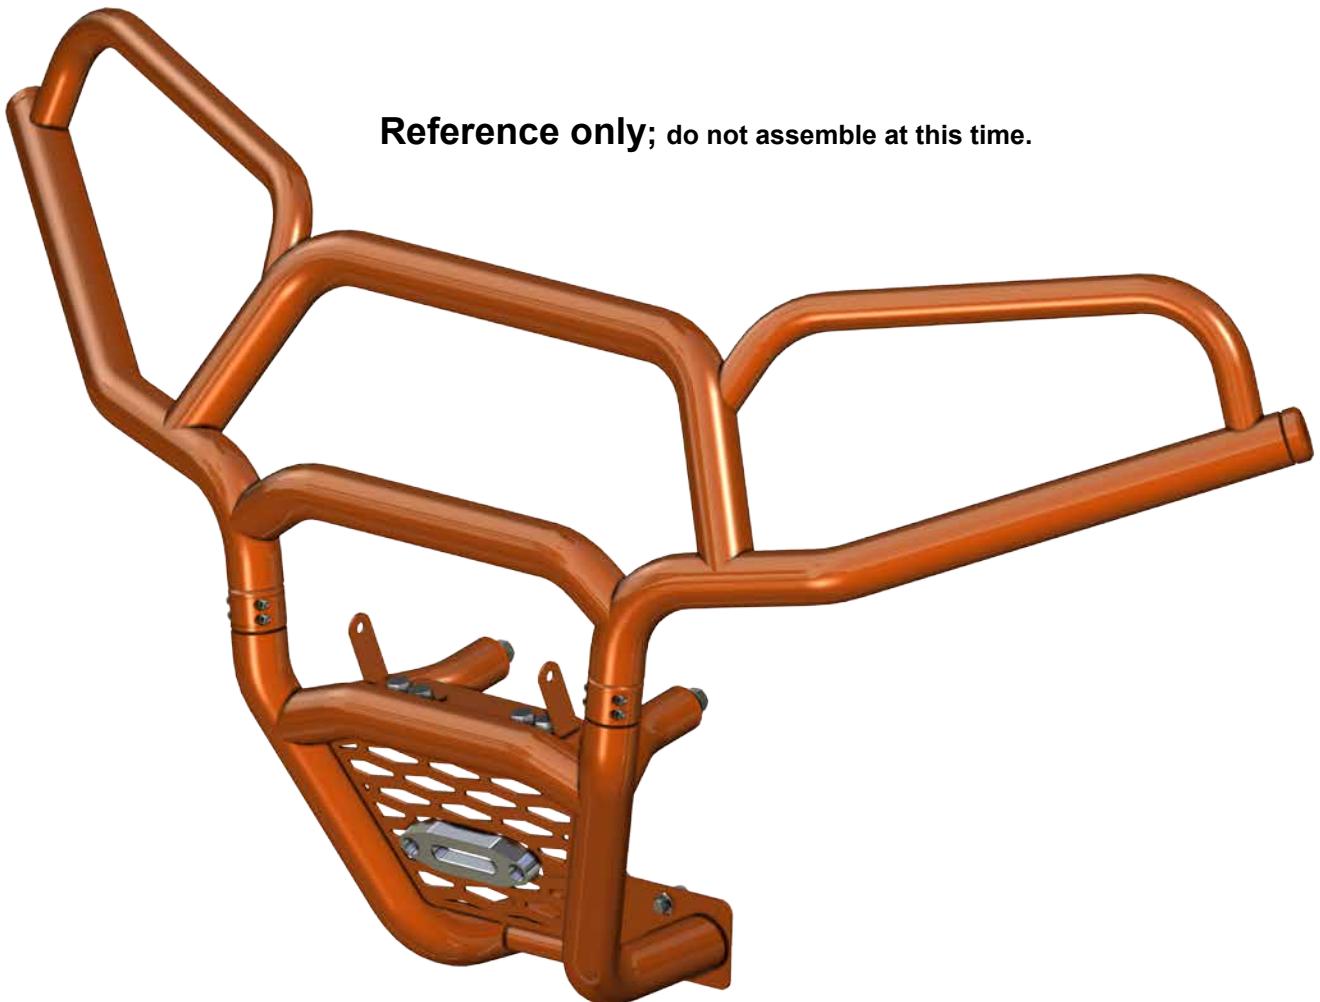



Removal: *Keep all components removed from machine.*

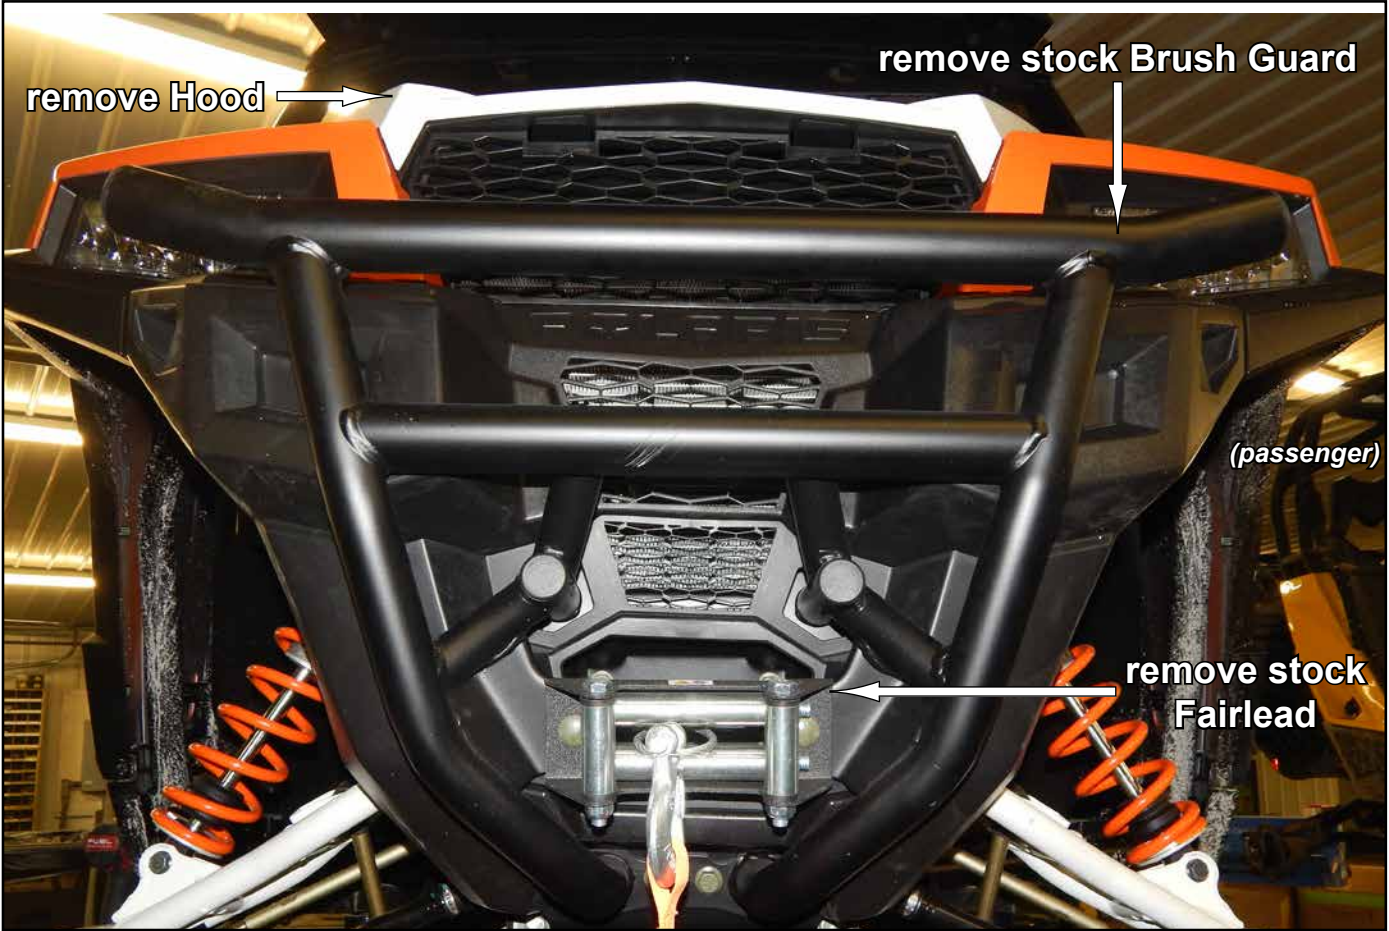

- Install Lower (B) to Frame with hardware shown.

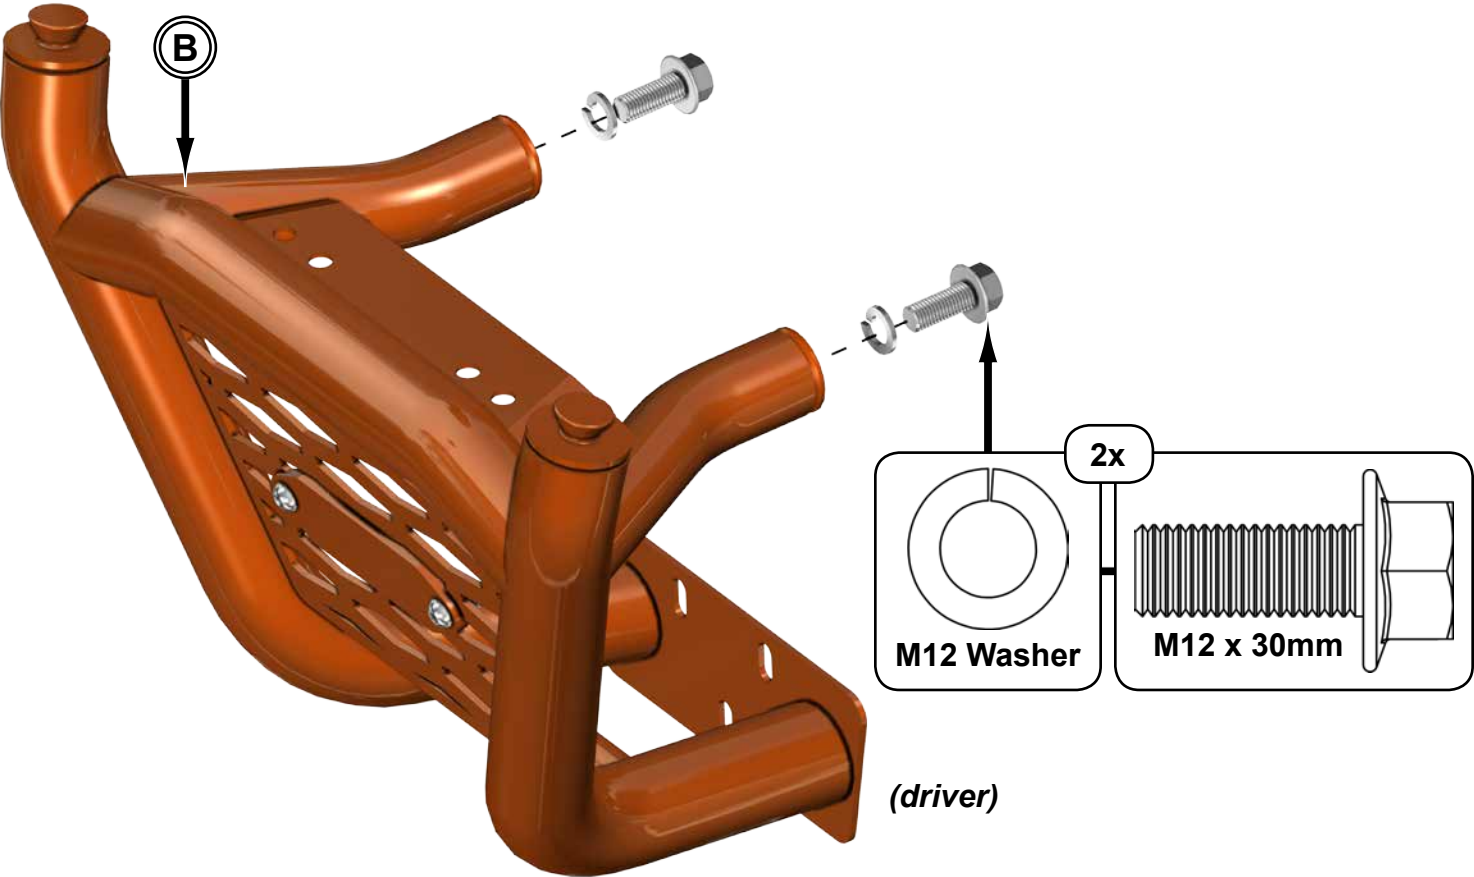


- Secure Lower (B) to Frame with hardware shown.

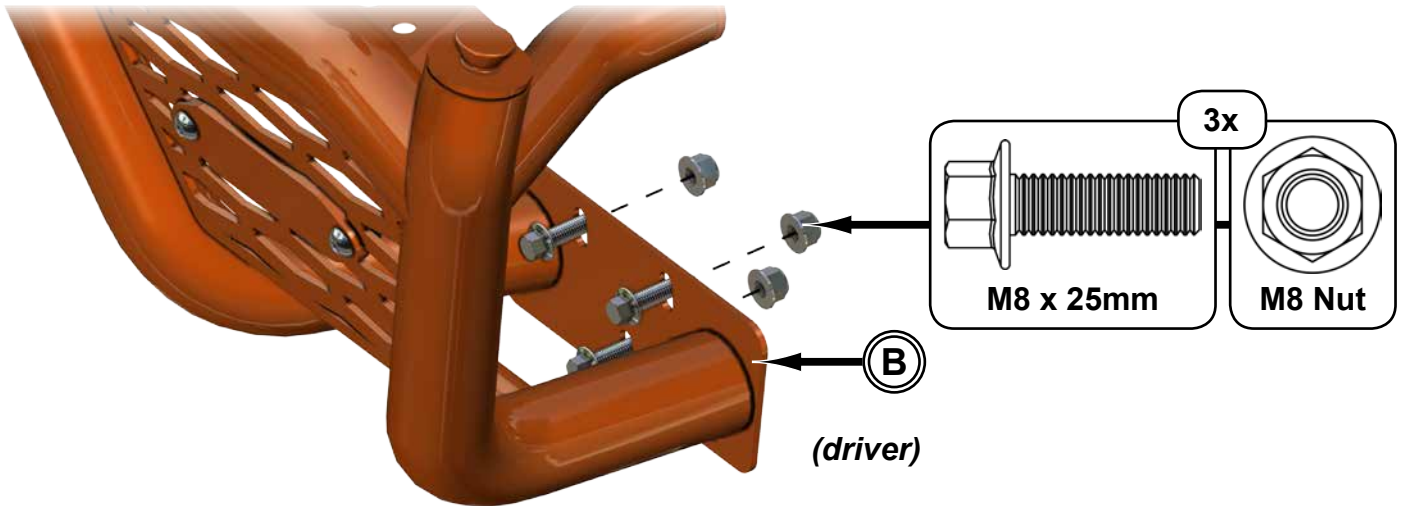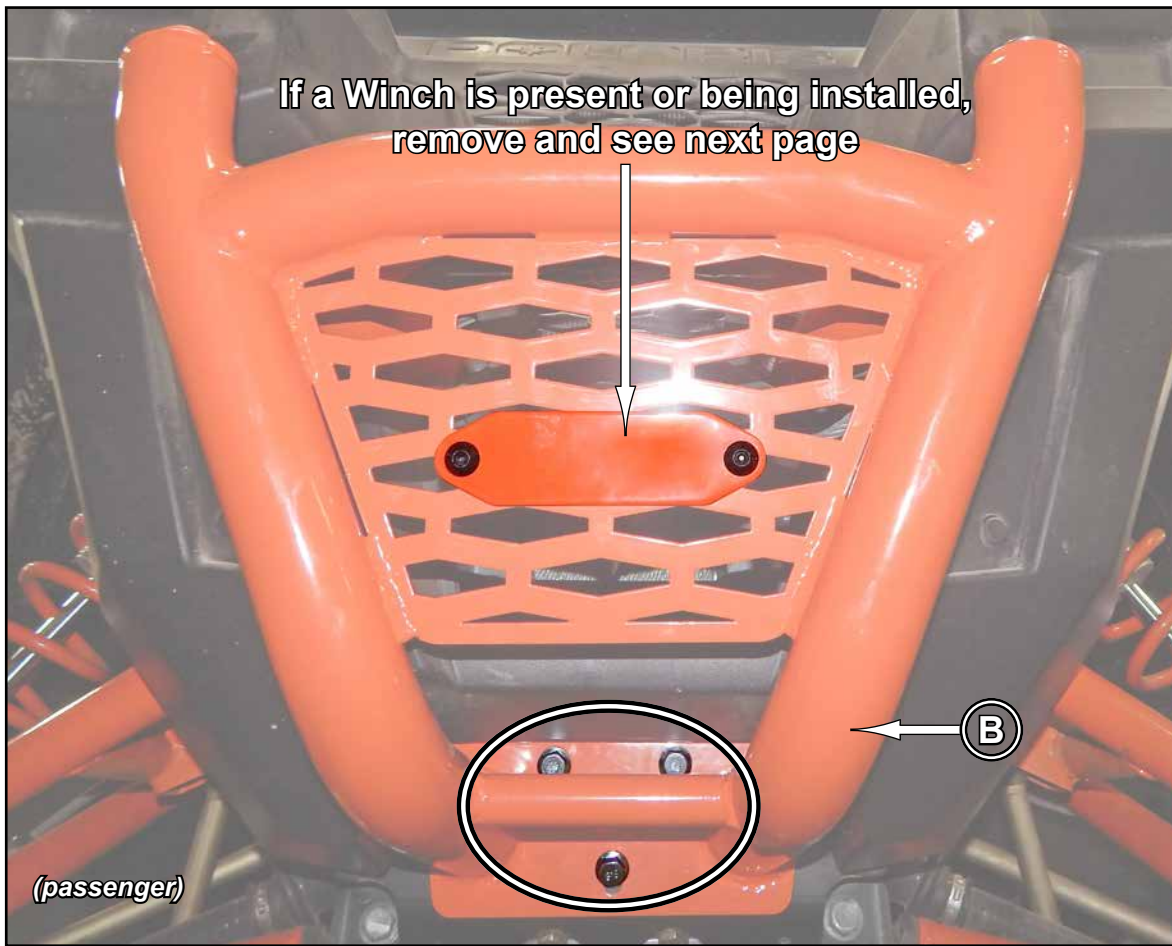


If a Winch is installed, install 3500 Fairlead (C).

- Install 3500 Fairlead (E) with hardware shown.

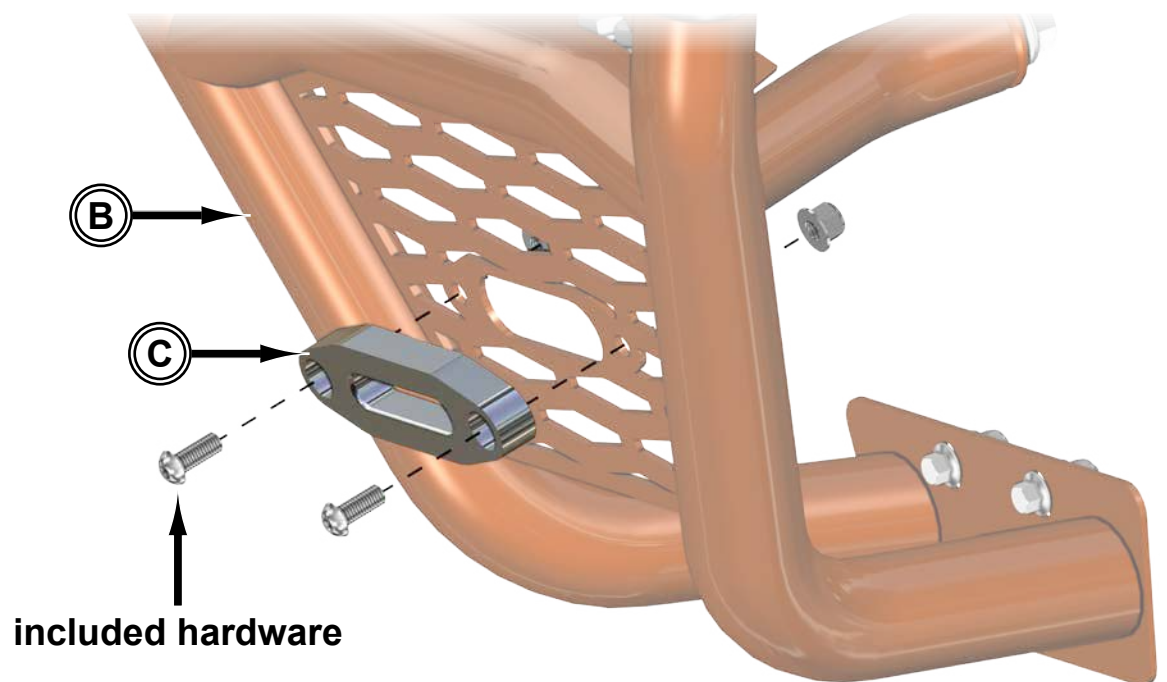


Tighten all Lower (B) hardware and reinstall Grille before installing Upper (A).

- Join Upper (A) to Lower (B) to Frame with Tube Clamps (D).

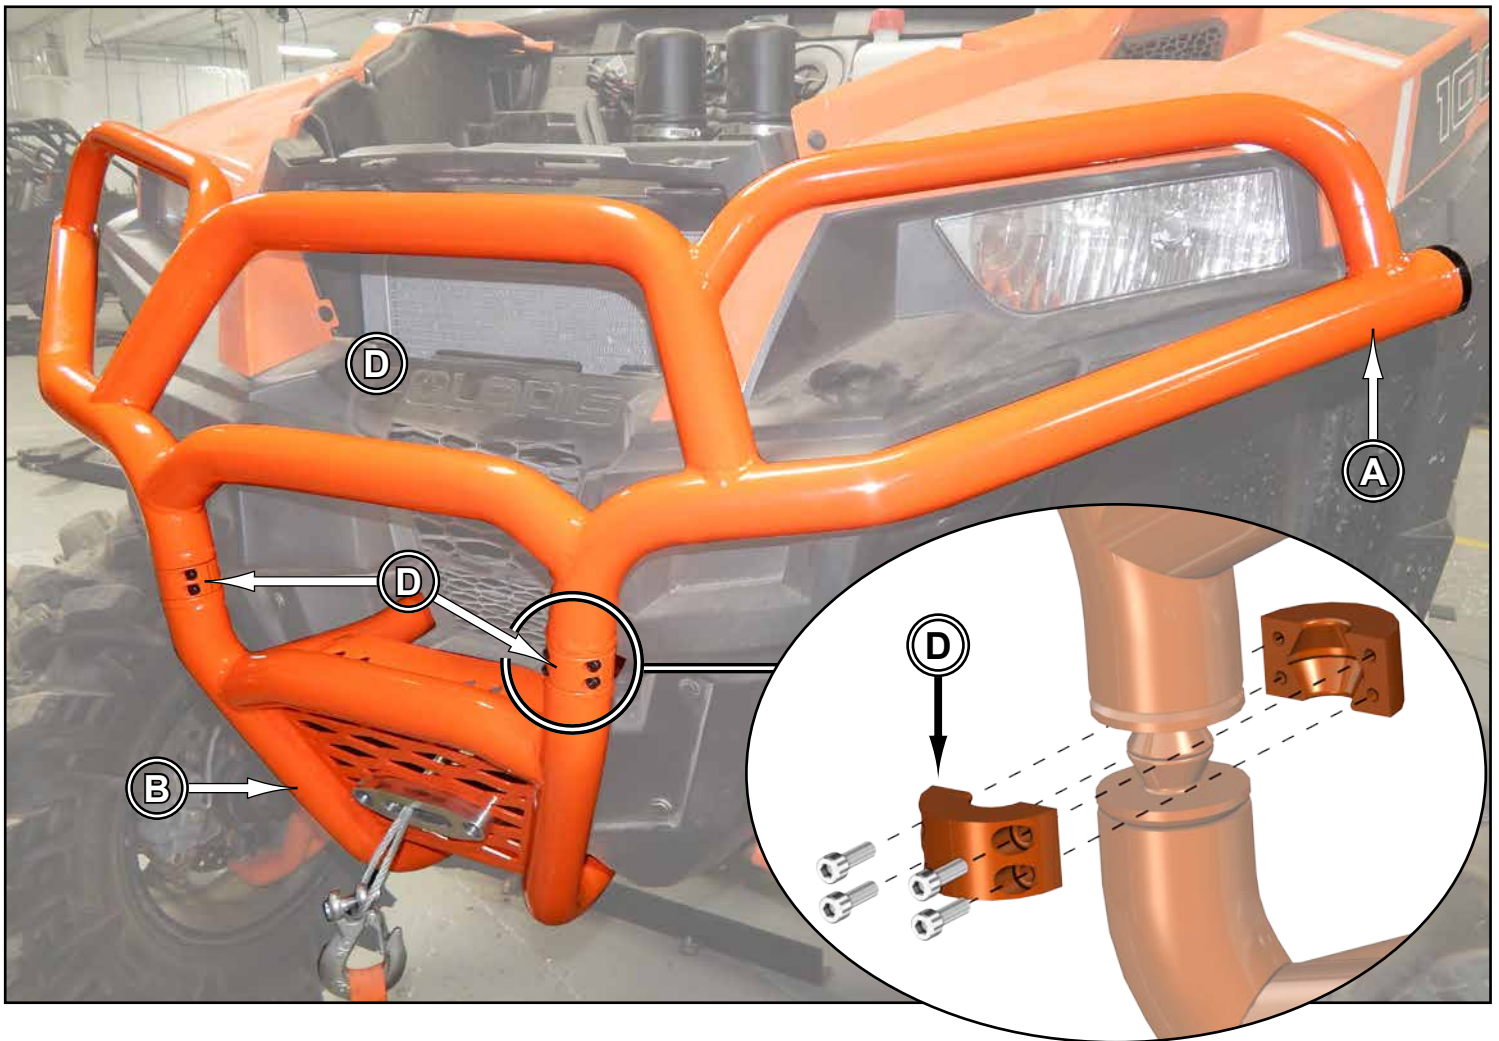

On some machines, Upper (A) may have slight contact with Hood. Add Spacers as needed.

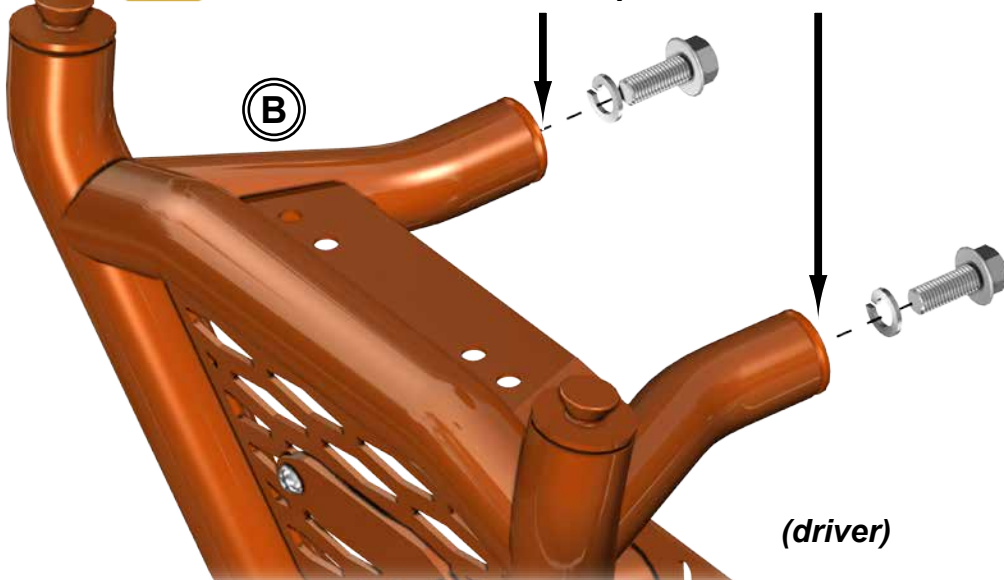

- Align Front Brush Guard assembly to machine and tighten all hardware completely.

Optional 12" LED Light Bar installation

SuperATV p/n LB3-12



- Install Light Mounts (E) to Lower (B) with hardware shown.
- With hardware previously removed from LED Light Bar, install to Light Mounts (E).
- Center LED Light Bar on Lower (B) and tighten hardware completely.

