


Nerf Bars: for Kawasaki Teryx4™

Item	Description	Qty
A	Right Rear	1
B	Right Front	1
C	Left Rear	1
D	Left Front	1
E	Clamp	4

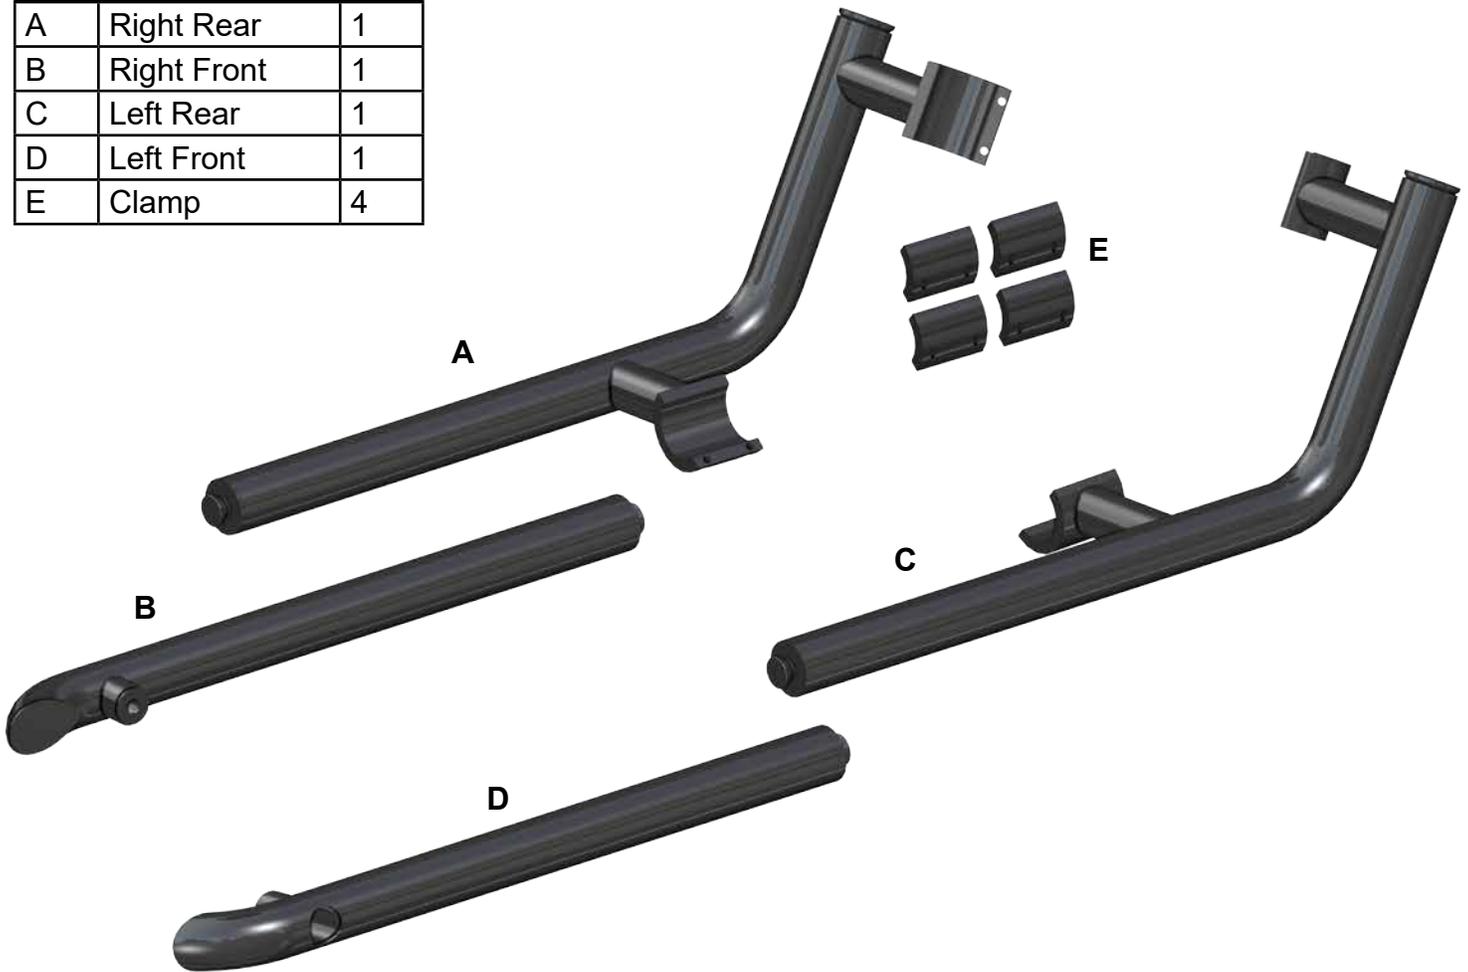

(kit contents continue on following page)

Read instructions and view illustrations before beginning.

Need help with your installation?



sales@superatv.com



www.superatv.com



1-812-574-7777



8:00am - 9:00pm EST M-Th
 8:00am - 7:00pm EST Friday
 9:00am - 2:00pm EST Saturday

*Thank You
 For Choosing*



Liability Statement

SuperATV's® products are designed to best fit user's ATV/UTV under stock conditions. Adding, modifying, or fabricating any factory or aftermarket parts will void any warranty provided by SuperATV® and is not recommended. SuperATV's® products could interfere with other aftermarket accessories. If user has aftermarket products on machine, contact SuperATV® to verify that they will work together.

Although SuperATV® has thousands of satisfied customers, user should be aware that installing lift kits, long travel, or suspension kits, tires, etc. will change the ride of machine and may increase maintenance and part wear. Operating any off-road machine while, or after, consuming alcohol and/or drugs increases risk of bodily harm or death. No warranty or representation is made as to this product's ability to protect user from severe injury or death. SuperATV® urges operators and occupants to wear a helmet and appropriate riding gear at all times.

By purchasing and installing SuperATV® products, user agrees that should damages occur, SuperATV® will not be held responsible for loss of time, use, labor fees, replacement parts, or freight charges. SuperATV®, nor any 3rd party, will not be held responsible for any direct, indirect, incidental, special, or consequential damages that result from any product purchased from SuperATV®. The total liability of seller to user for all damages, losses, and causes of action, if any, shall not exceed the total purchase price paid for the product that gave rise to the claim.

SuperATV® will warranty only parts provided by SuperATV®. Any damage or problems with OEM housings, bearings, seals, or other manufacturers' products will not be covered by SuperATV®. SuperATV® parts and products are not warranted if item was not installed properly, misused, or modified.

(kit contents continued)

Item	Description	Qty
F	Drill Bushing	1
G	End Cap	2
H	Alignment Washer	2
J	Tube Clamp	2

F





G




H



J




2x M10-1.50 Nylock Nut



8x M6-1.0 x 20mm Lg. SHCS




2x M10-1.50 x 75mm Lg. FHCS




2x M12-1.75 x 30mm Lg. BHCS

Reference Only: do not assemble at this time.

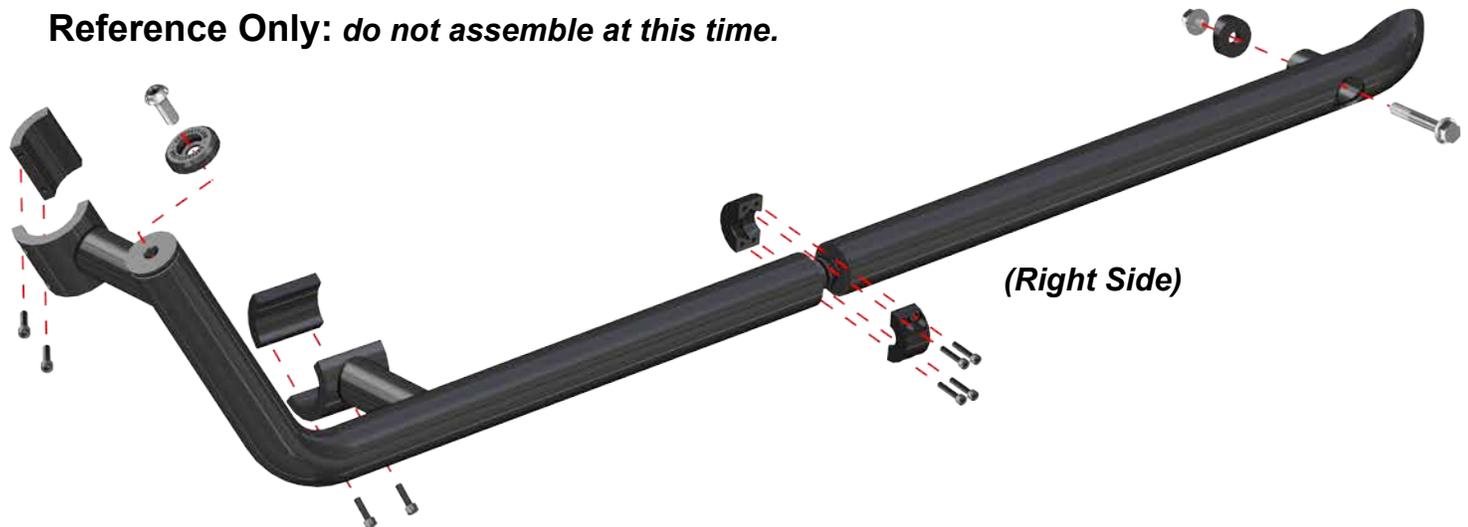

Do not tighten hardware completely unless noted.

- Place Left Rear (C) against Frame and secure with Clamps (E) and hardware shown.

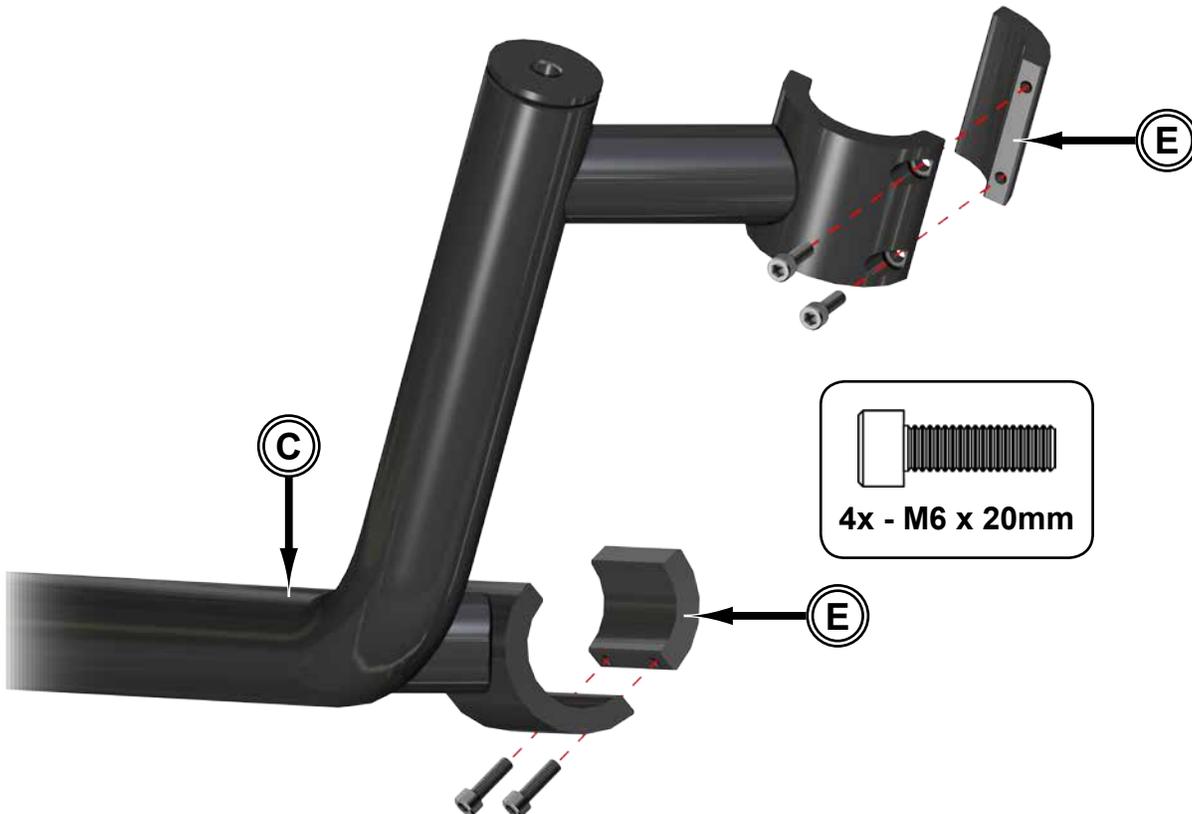


Do not tighten hardware completely unless noted.



- Secure Left Front (D) to Left Rear (C) with Tube Clamp (J).



- Install Drill Bushing (F) into Left Front (D).


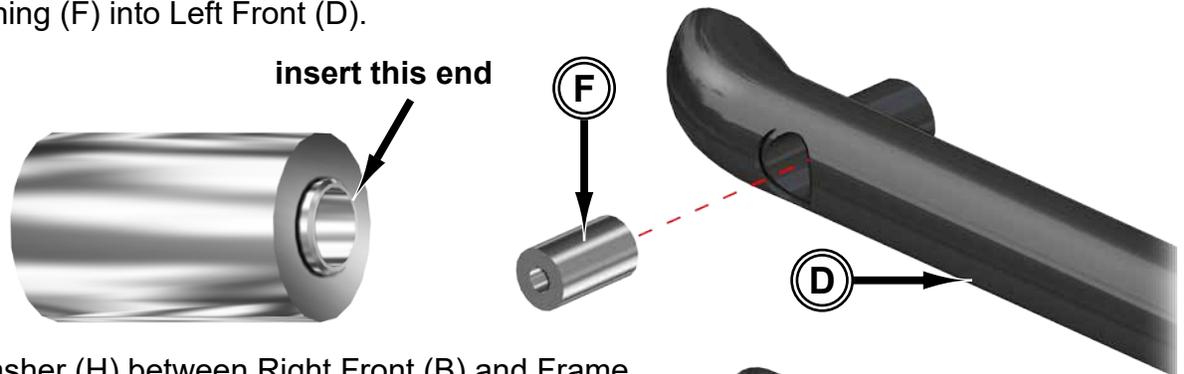


- Place Alignment Washer (H) between Right Front (B) and Frame.
- Drill through both sides of Frame.

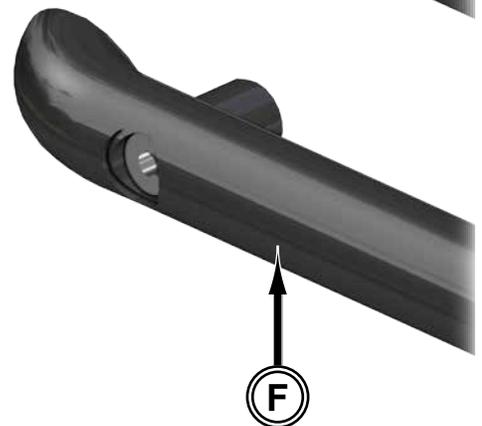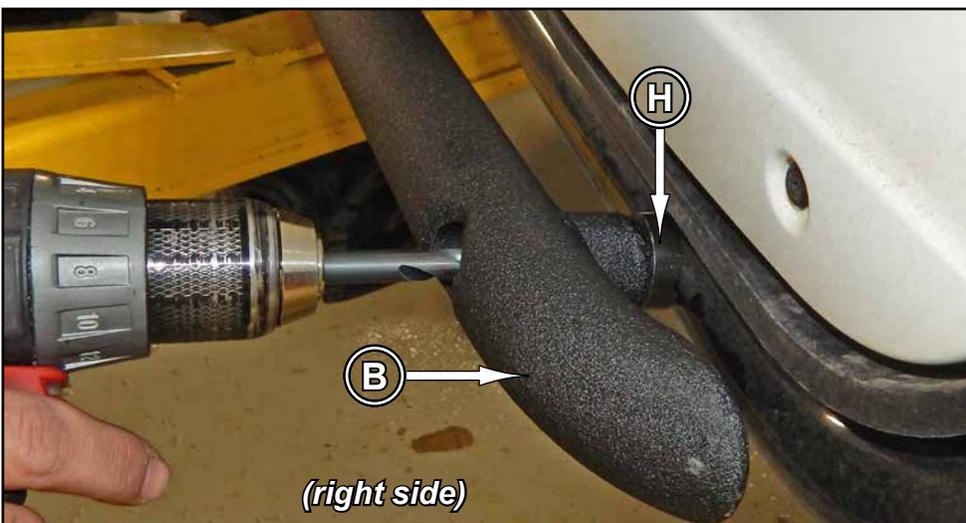


Do not tighten hardware completely unless noted.

- Secure Left Front (D) and Misalignment Washer (H) to Frame with hardware shown.

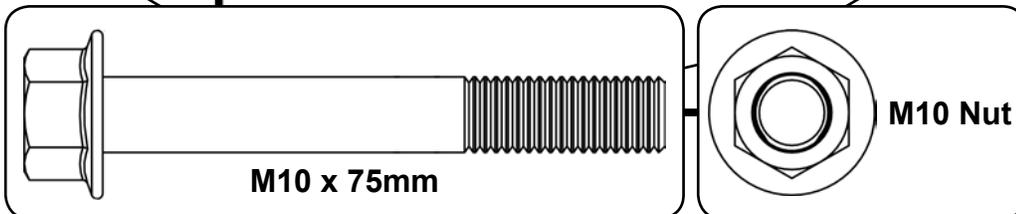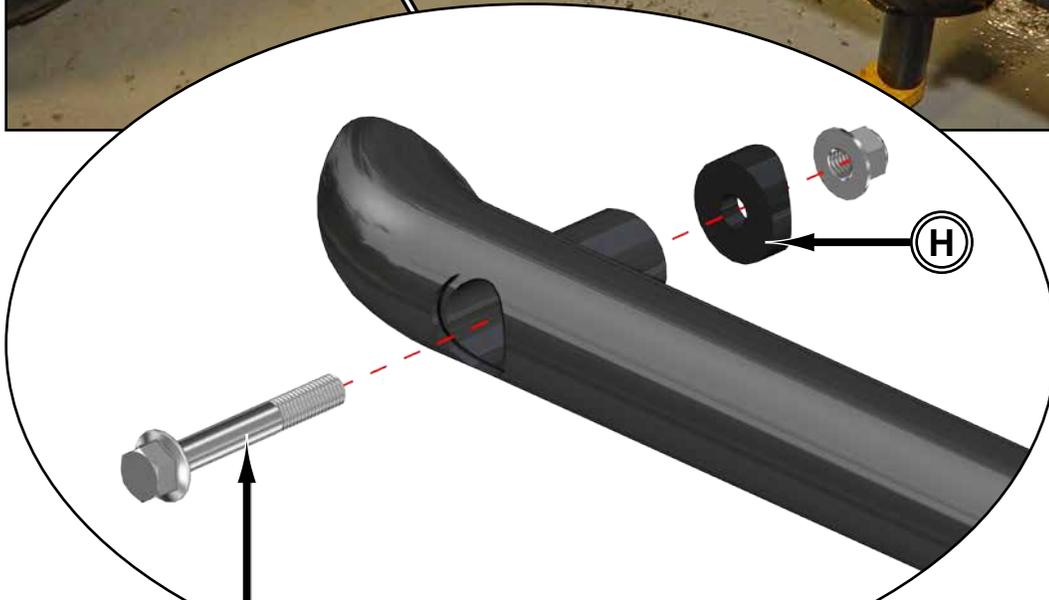

- Secure End Cap (G) to Left Rear (C) with hardware shown.

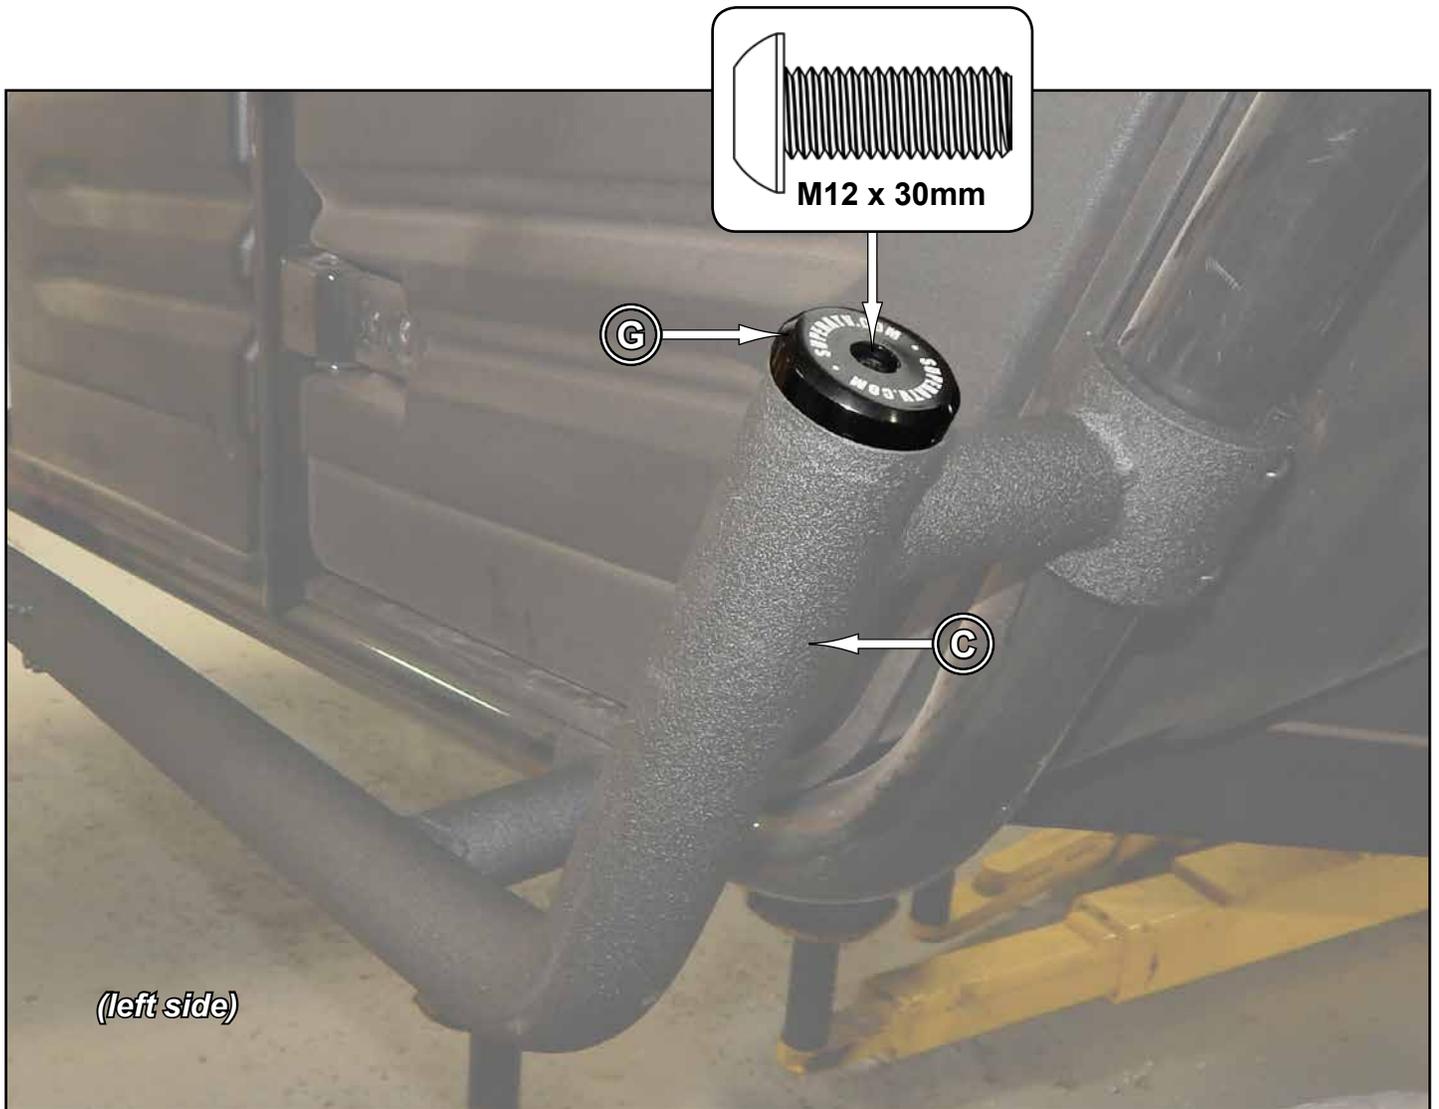

- Align Nerf Bar to machine and tighten all hardware completely.
- Repeat steps for opposite side.