




INSTALLATION INSTRUCTIONS

1. Begin by removing the muffler off the rear end of your General.
2. Loosely pre-assemble the muffler assembly. Space the muffler clamps according to the spacing on the muffler hanger. Do not full tighten for you will need to adjust later. Set to the side once complete.
3. Lift the bed of the vehicle and install the muffler hanger through the frame of the vehicle.
4. Proceed to mount the muffler assembly on the hanger using supplied hardware.
5. With the muffler clamps loose, install the Y pipe on the muffler and the header. Once set in place, proceed to tighten the muffler clamps and install springs.
6. Tighten all hardware
7. Before starting the vehicle, wipe down all surfaces to rid of oil residue and fingerprints.

WHAT'S IN THE BOX!



Qty 2



Qty 2



Qty 2



Qty 4



Qty 6



Qty 10




Qty 2



Qty 8



Qty 2

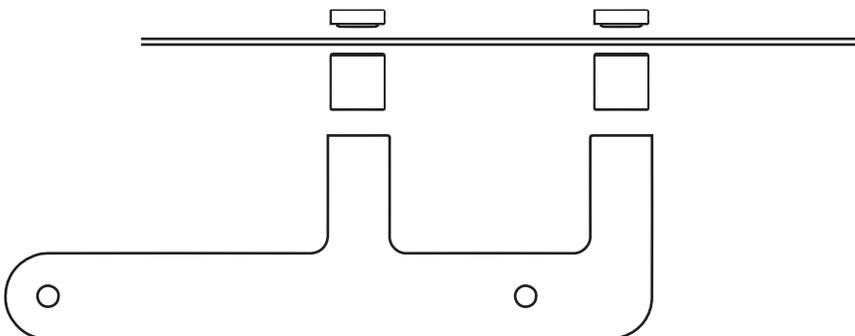



WARNING

* Trinity Racing exhaust systems will require adjustment to OEM fuel settings such as installation of an EFI programmer. Trinity Racing will not be held responsible for damages that occur during operation of your vehicle under improper fuel settings. Ultimately, it is the responsibility of the owner/rider to adjust fuel settings to specific riding conditions.

* Inspection of the muffler packing is recommended following every 30 hours of runtime. Failure to maintain muffler packing will result in power loss, increased sound output, and damage to the muffler body or muffler components.

* Trinity Racing exhausts systems are designed for high performance applications and are legal for closed course competition only. This product is not applicable nor intended for use on emissions controlled street, highway, or off-road vehicles.

