

Thank you for purchasing this Dynojet kit. This kit has been developed for a motorcycle which is set to the parameters listed at the right in the "Stage" description. If your motorcycle does not meet any of these parameters please check with Dynojet before installation. For technical assistance contact your Dynojet distributor or call Dynojet U.S.A. (800)-992-4993

2191 Mendenhall Dr. Suite 105
North Las Vegas, NV 89081
TEL: 702-399-1423
FAX: 702-399-1431
8am-5pm Pacific Time
Monday through Friday

Website Address
<http://www.dynojet.com>

The manufacturer and seller make no warranties express or implied which extend beyond the description of the goods contained herein. Any description or this product is for the purpose of identifying it and shall not be deemed to create an express warranty.



2144HA.001

High Altitude Only

1987-2007 Kawasaki KLR650

Stage 1&2


STAGE 1

For mildly tuned machines using the stock airbox,
with stock or K&N filter #KA-6589

STAGE 2

For mildly tuned machines using a modified stock airbox
with stock or K&N filter #KA-6589

Both stages may be used with a good aftermarket exhaust

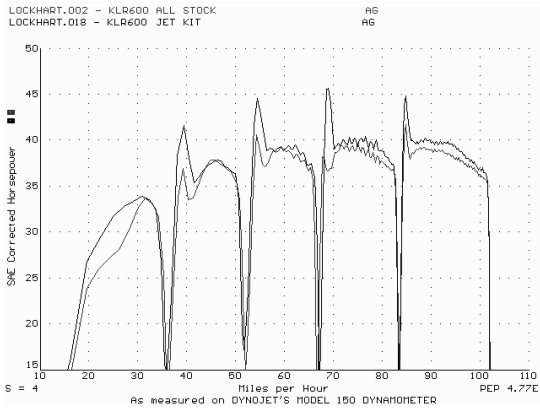

This graph shows a typical gain with a Dynojet jet kit.

WARNING

**NO SMOKING!
NO OPEN FLAME!
WHILE INSTALLING
YOUR DYNOJET KIT**

Parts List

1	Main Jet	DJ132
1	Main Jet	DJ136
1	Main Jet	DJ140
1	Fuel Needle	DNO228
1	E-clip	DE0001
2	Adjusting Washers	DW0001
1	Slide Drill	DD 30
1	Plug Drill	DD 5/32
1	Screw	DS0001

STAGE ONE INSTRUCTIONS


1. Remove the vacuum slide from the carb. Remove the stock needles and spacers, noting order of assembly (Fig. A). Using the drill bit provided (DD #30) enlarge your slide lift hole. The picture may not show your slide exactly. Drill only the existing slide lift hole. **Do not drill the needle hole or any new holes.**

2. Install the Dynojet needles on groove #3 from the top. Install the small Dynojet washers above the e-clip (2 per needle). After installing the slides in the carbs be sure to check slide movement manually.

3. Remove the stock main jets and replace with the Dynojet main jets provided. If you are running the stock exhaust install the DJ132 main jets. If you are running an aftermarket exhaust or slip-on with high flowing baffle use the DJ136 main jets. Be sure that the jet you are changing is the main jet.

4. Locate the fuel mixture plug (Fig. B). If you see a screw head at Fig.B then proceed to the adjusting procedure. With the DD #5/32 drill bit provided carefully drill through the plug. **NOTE:** The mixture screw is directly underneath this plug, be ready to pull back on the drill the instant you break through. Use screw provided to secure and remove this plug. Carefully turn the mixture screw clockwise until lightly seated, then back out 3 turns.

Fig. A

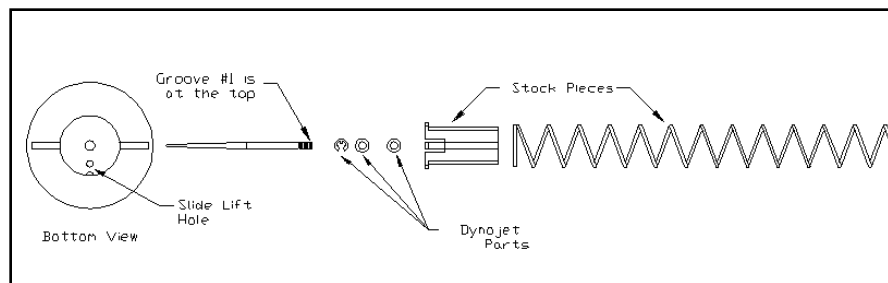

STAGE TWO INSTRUCTIONS

Dynojet

2144HA.001

1. Remove the vacuum slides from the carbs. Remove the stock needles and spacers, noting order of assembly (Fig. A). Using the drill bit provided (DD #30) enlarge your slide lift hole. The picture may not show your slide exactly. Drill only the existing slide lift hole. **Do not drill the needle hole or any new holes.**

2. Install the Dynojet needles on groove #3 from the top. Install the small Dynojet washers above the e-clip (2 per needle). After installing the slides in the carbs be sure to check slide movement manually.

3. Remove the stock main jets and replace with the Dynojet main jets provided. If you are running the stock exhaust install the DJ1360 main jets. If you are running an aftermarket exhaust or slip-on with high flowing baffle use the DJ140 main jets. Be sure that the jet you are changing is the main jet.

4. Locate the fuel mixture plug (Fig. B). If you see a screw head at Fig.B then proceed to the adjusting procedure. With the DD #5/32 drill bit provided carefully drill through the plug. **NOTE:** The mixture screw is directly underneath this plug, be ready to pull back on the drill the instant you break through. Use screw provided to secure and remove this plug. Carefully turn the mixture screw clockwise until lightly seated, then back out 3 turns.

Fig. B

