

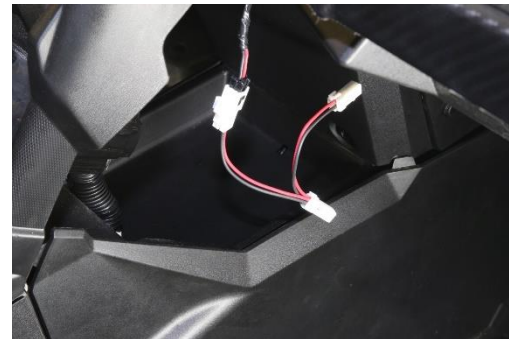


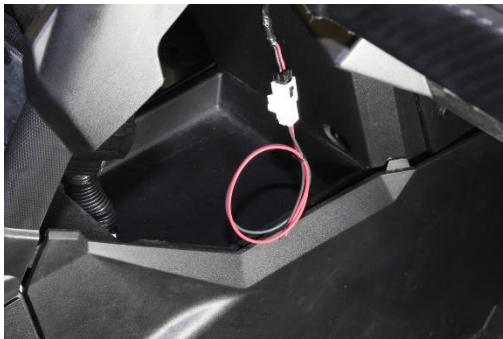

CAN-AM Accessory Power Adapters

Thank you for purchasing XTC's Under Dash Accessory Power Adapter. Please read the instructions fully and familiarize yourself with the components before starting the install. XTC Currently offers 3 adapters, 12" Pig Tail, 12" Fused Pig Tail and a Y Adapter. These are basic instructions for all three.

1. Remove the plastic center cover under the dash exposing the main wire harness.
2. Cut the cable tie and that holds the AUX Plug to make it simpler to use, the connector maybe in the back of the harness hidden, un-plug the OEM accessory port cover (White Plug) by pushing the center button.
3. Plug in the adapter. Re-install center plastic Cover.

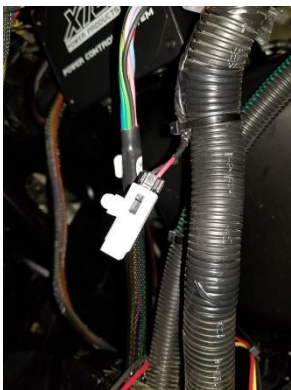

4. Attach the adapter to the device to be powered. Make sure every device installed on the accessory plug has its own in line fuse or circuit protection.
5. Plug the adapter into the port. The accessory port shares the same fuse as the Dash DC Outlet, it is in Fuse Block position F12 and is a 20 Amp Fuse.

WARNING! Do not exceed the overall power out of the of the DC Outlet Circuit, 20 Amps.

We can also be reached by email at support@powerproducts.com
To purchase Accessories please visit our web site at www.xtcpowerproducts.com
Copyright © 2023 XTC MOTORSPORTS LLC, all rights reserved

XTC Power Products
A Division of XTC Motorsports LLC
380 E Comstock Dr.
Chandler AZ 85225
480-558-8588
www.xtcpowerproducts.com