


MB3056 - REAR HALF DOORS


COMPATIBLE WITH JEEP JKU





ASSEMBLY INSTRUCTIONS

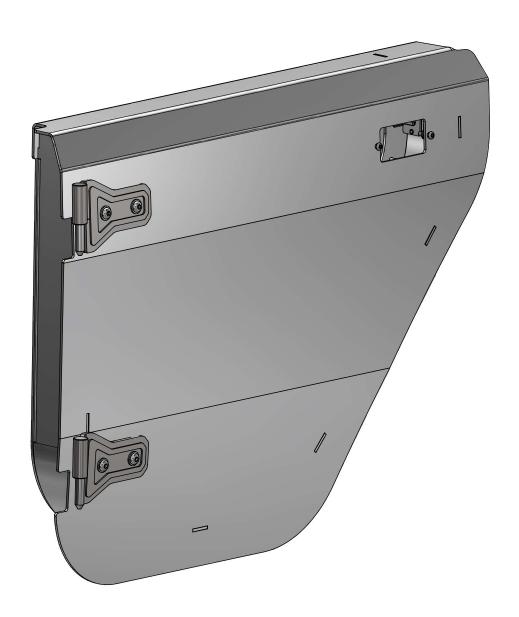



CONTENTS

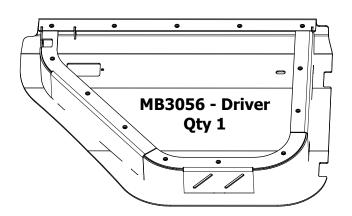










BAG LABELED AS MB3056-KIT01






MB3064-JKT Hinge, Upper Driver Qty 1

MB3064-JKT_MIR Hinge, Upper Passenger Qty 1 Round Head Screw, Stainless 5/16"-18 UNC x 1.00" Long Qty 8







MB3064-JKB Hinge, Lower Driver Qty 1

MB3064-JKB_MIR Hinge, Lower Passenger Qty 1


Flat Washer, Stainless 5/16" Qty 16



Nylock Nut, Stainless 5/16" UNC Qty 8




CONTENTS

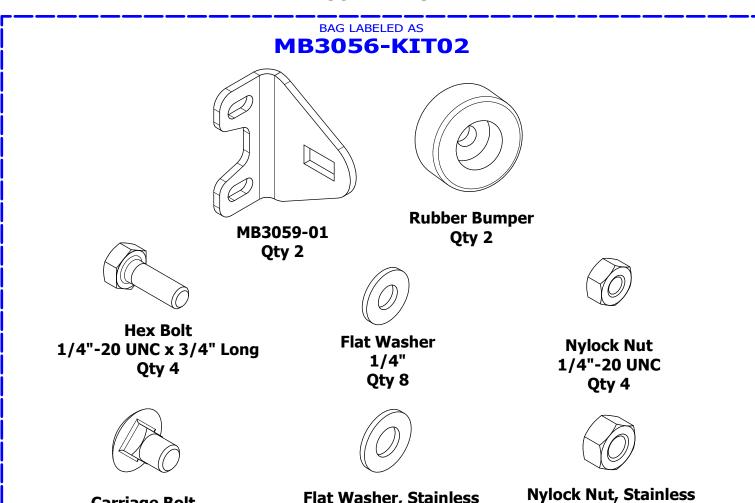


Carriage Bolt 5/16"-18 UNC x 3/4" Long Qty 2

Flat Washer, Stainless 5/16" Qty 2 Nylock Nut, Stainless 5/16"-18 UNC Qty 2

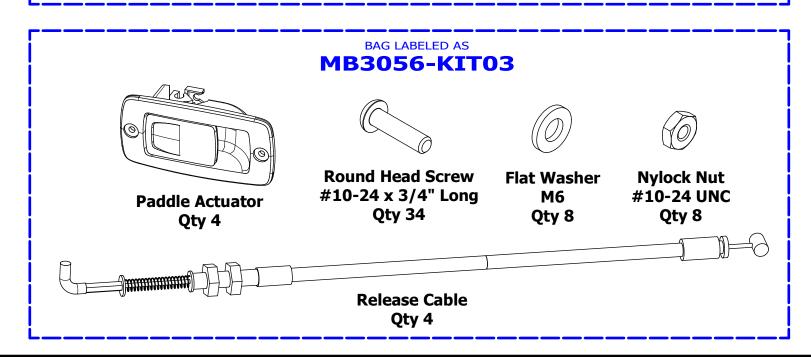




CONTENTS

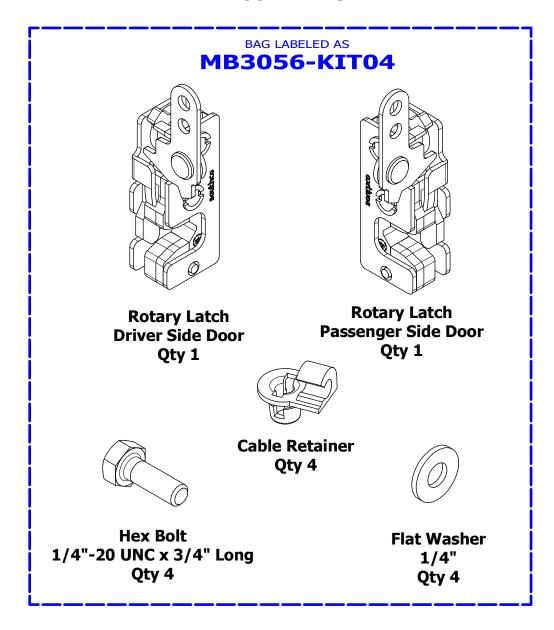




MB3043 - Assembly Instructions Rear Half Doors JL/JLU/JT

ASSEMBLY - STEP 1

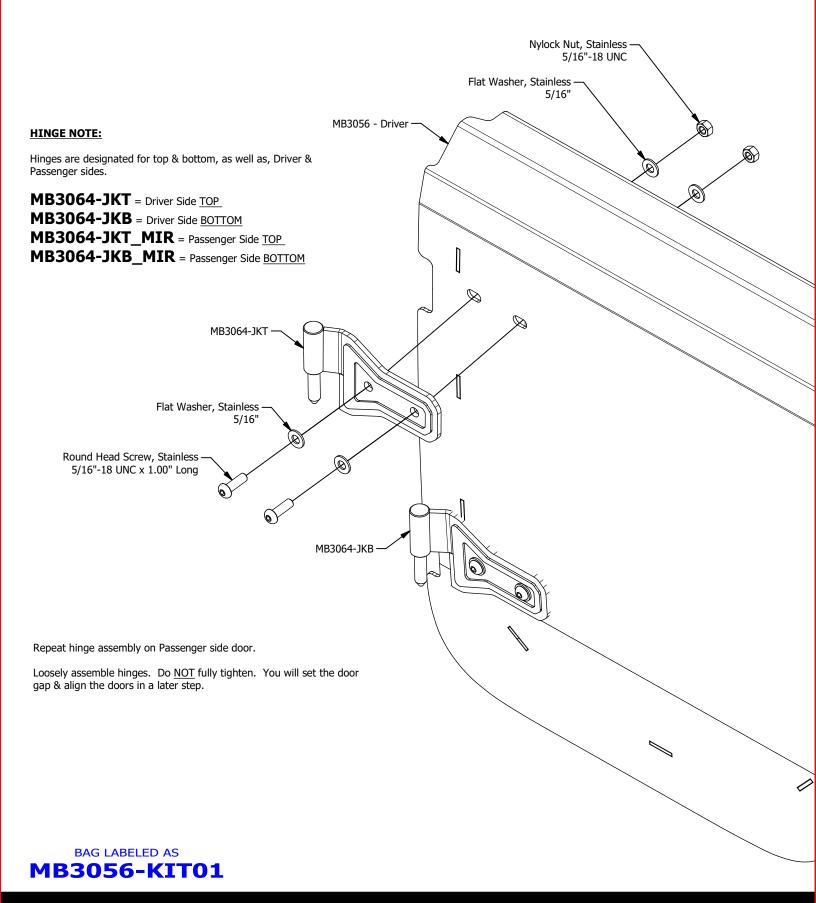





ASSEMBLY - STEP 2

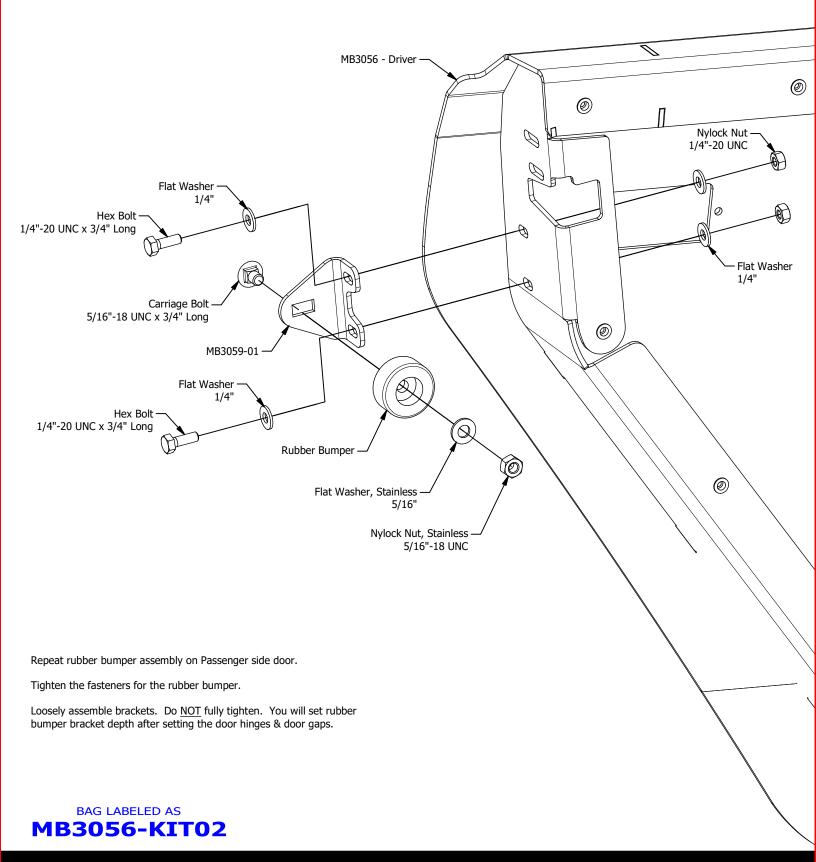



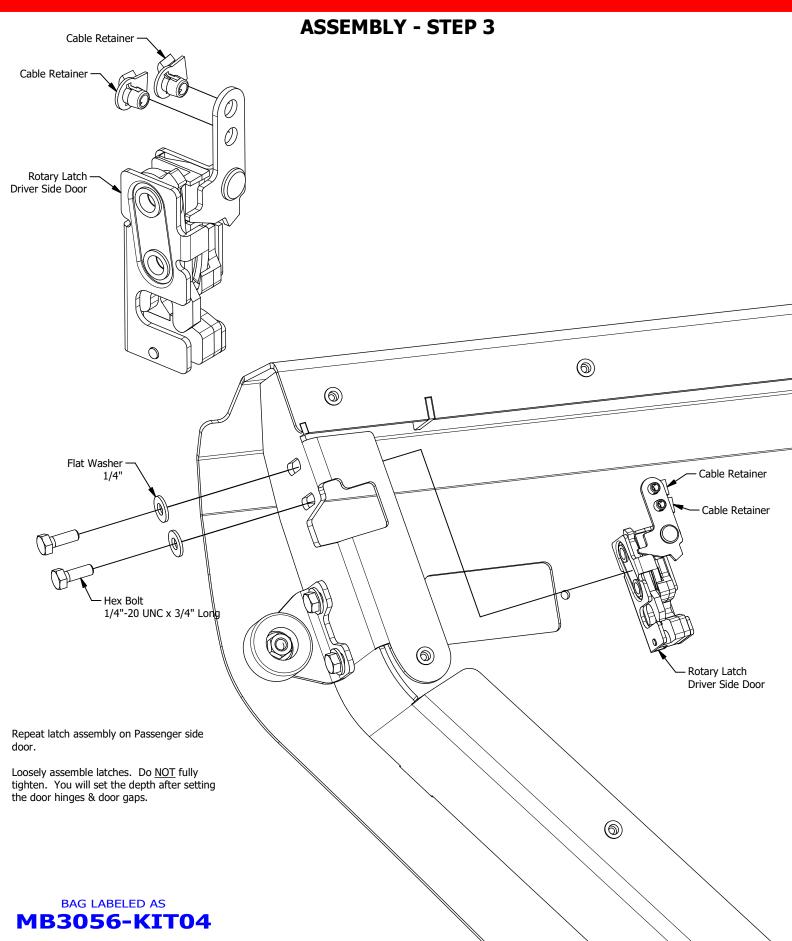




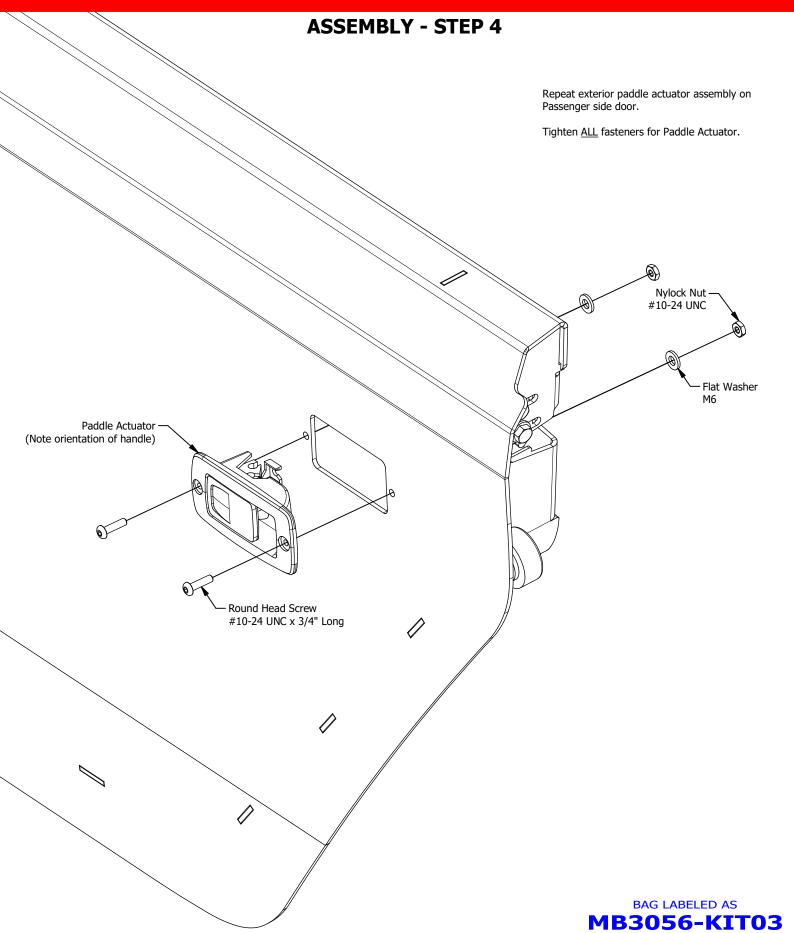



ASSEMBLY - STEP 5

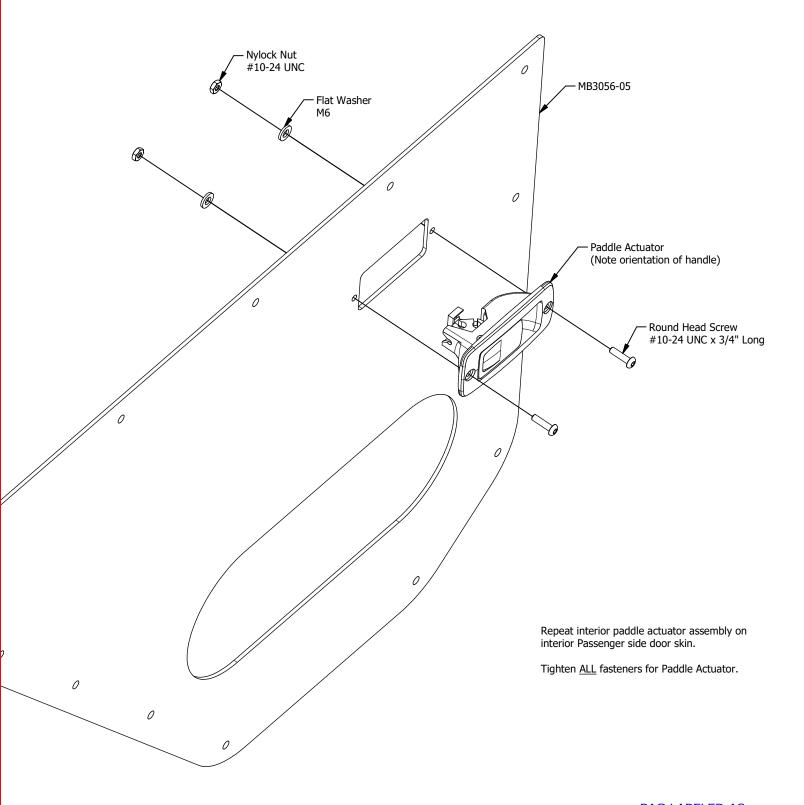


BAG LABELED AS

MB3056-KIT03




ASSEMBLY - STEP 6

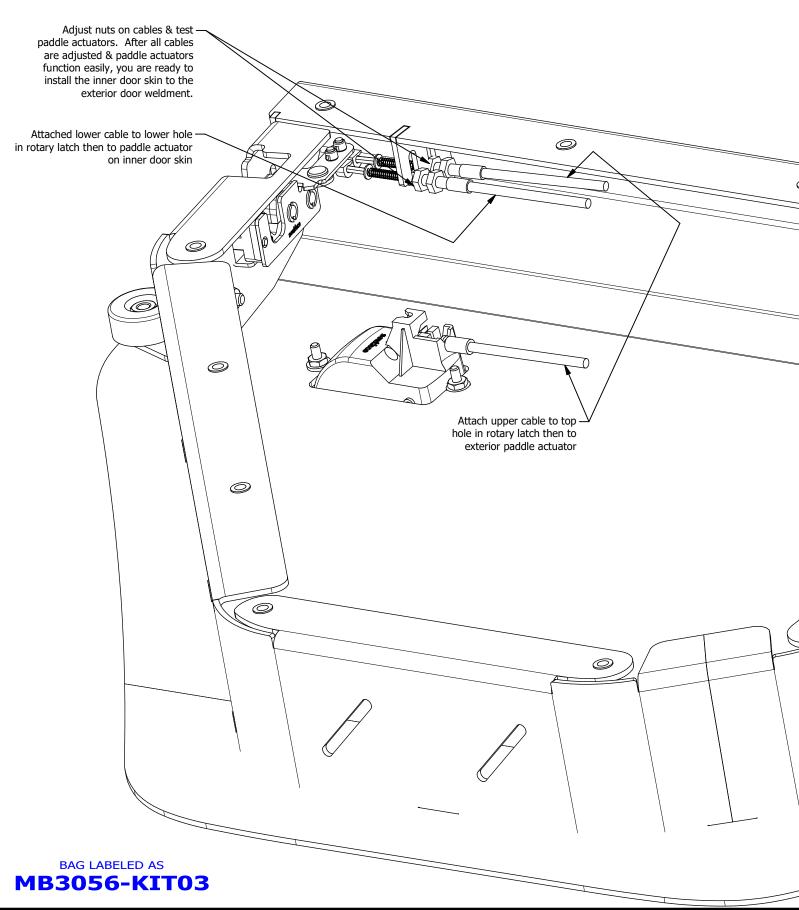



ASSEMBLY - STEP 7

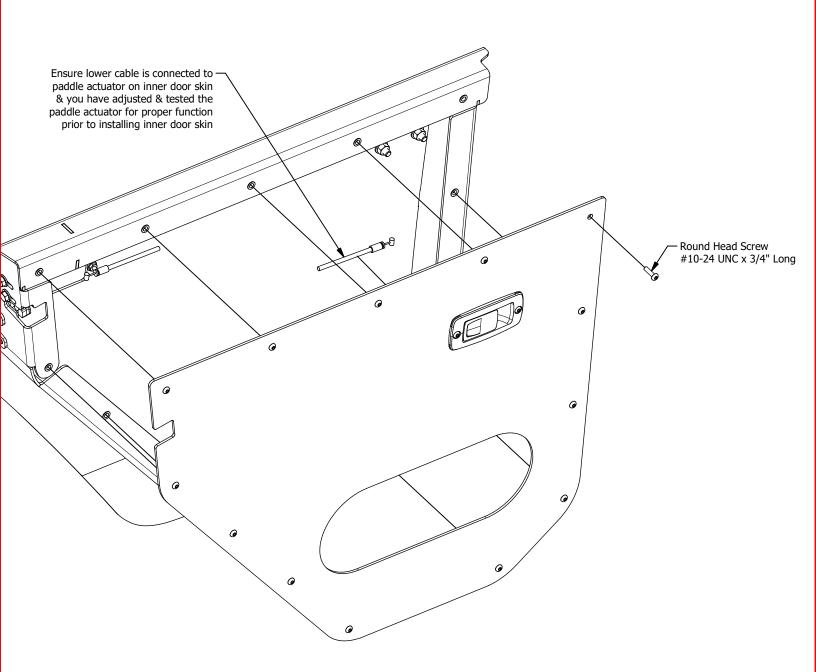

BAG LABELED AS

MB3056-KIT03



ASSEMBLY - STEP 8

FINAL ASSEMBLY & ADJUSTMENT

1. Ensure hinge bolts are loose

12

- 2. Place assembled half door on vehicle door hinges
- 3. Close the door & view the door from the side of the vehicle
- 4. Adjust the door to ensure there is an even reveal & gaps from left to right & top to bottom
- 5. With the door remaining closed, tighten the hinges bolts
- 6. Open the door & adjust the rotary latch fasteners as well as the rubber bumper so that the door latches smoothly & the door sits flush with the outer body

