



TUFF STUFF®
→ OVERLAND →

ALPHA

TM

TUFF STUFF® ALPHA ROOF TOP TENT




Roof Top Tent Owner's Manual

Congratulations on your purchase of an Tuff Stuff Overland Roof Top Tent. We strive to provide the ultimate camping experience for every roof top tent camper. This quality roof top tent mounts directly to your roof rack or after market roof bars and can be fully setup in just a few minutes. It can be left on your vehicle year-round.

Tuff Stuff Overland tents are made with the best materials that stand up to the most extreme conditions. High quality rip stop fabrics provide excellent water and wind protection.

Most of your Tuff Stuff Overland Tent components have been fully assembled at the factory except for attaching the mounting tracks and the ladder to the base of the tent. Installation is composed of unpacking, attaching mounting tracks to the base of the tent, attaching the ladder, attaching the tent cover, and then mounting your Tuff Stuff Overland Tent onto your roof rack or after market roof bars. All the tools and hardware required for installation are included. Should you have any questions, please email support@tuffstuff4x4.com or call Customer Service at 866-220-0171

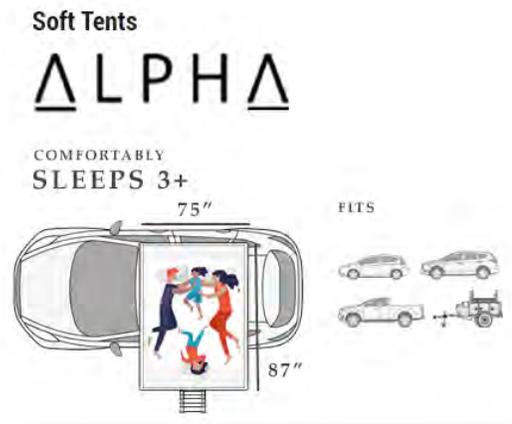

WARNING

Improper installation or use of your tent may result in serious injury or death. Follow these installation instructions carefully to ensure proper installation on your vehicle and safe use of your tent. Please check with your vehicle manufacturer for specified loading capacity of your roof rack. Not all factory roof racks or after market roof bars can safely accommodate tent models.

Tuff Stuff ALPHA Rooftop Tent Manual



WARNING:

Your vehicle **MUST** have a roof rack or cross bars installed in order to mount this tent.

The cross bars **MUST** have a dynamic weight load of at least 165Lbs and **MUST** be at least 30" apart.

CONTENTS INCLUDE:


- One Hard shell tent with the ladder installed
- Two mounting Rails (including four M6*40mm bolts and four self-locking nuts)
- One tool kit (contains one 13mm spanner, one 10mm spanner, four U-Shaped mounting brackets, eight M8*35mm square-head bolts and eight self-locking nuts)
- One storage bag
- One shoe bag
- One wind-resistant bag
- Two tension rods (One tension rod carrying bag)



INSTALLATION

The tent is designed to open on the passenger side of the vehicle **ONLY**.

- 1、 Using 2-4 people, lift the tent on to the cross bars of your vehicle and center the tent
- 2、 Insert two square-head bolts into the rail under the tent according to the width of your cross bars.

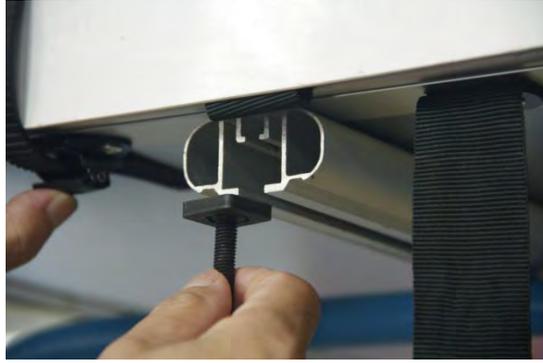

- 3、 Have one person lift the tent, while another person slides the piece over the cross bar, so that one bolt is on each side of the cross bar
- 4、 Take the bottom bracket and fit it under your cross bar so that the bolts go through both holes on either side.
- 5、 Attach one nut on each bolt and tighten them using a 13mm wrench. **IMPORTANT:** Tighten two bolts simultaneously so the pressure is equal on both sides.



- 6、 Repeat process 2-5 on all 4 corners

IMPORTANT: AFTER INSTALLING THE TENT ON YOUR VEHICLE, MAKE SURE THAT EACH BRACKET IS SECURELY FASTENED. SHAKE THE TENT TO INSURE IT WILL NOT MOVE- CHECK TENT AFTER DRIVING A SHORT DISTANCE TO ENSURE THE TENT HAS NOT SHIFTED ON THE ROAD

OPENING THE HARD SHELL

- 1、 Unlock the fastening soft strap, push the button and release the reinforced strap



- 2、 With one hand, push up the hard shell handle. The gas struts will open the rest of the tent on its own.



- 3、 Once the top has fully opened, reach up and grab the base of the ladder.
- 4、 Undo the Velcro strap and extend the ladder.
- 5、 Push down on the ladder, as it acts as a lever and lowers the extension floor.



- 6、 After the extension floor has been lowered, secure the ladder by bringing the top rungs up until they are locked into place. *Do not collapse the bottom rungs*

LADDER OPERATION

CAUTION: FAILURE TO PROPERLY SECURE THE LADDER COULD CAUSE SERIOUS INJURY.

- 1、 When opening the ladder, withdraw all rungs and open each rung from the bottom to the top, each rung must be locked. If the ladder is too long, you can push the top few rungs up until they are locked into place. There should not be any rungs bunched up at the bottom- Only the top



- 2、 Make sure the base of the ladder is placed on even, solid ground.

If the terrain does not allow the ladder to have a stable, even base, move your vehicle. Do NOT install the ladder on uneven ground.

- 3、 Place the ladder at an approximate 70° angle as pictured below, and make sure it is firmly planted in the ground.

The ladder should NOT be over-extended as it does not offer enough support, and is should not be too vertical either.



- 4、 Before going up the ladder, you must check carefully again whether each rung is secured. Grab the sides of the ladder with both hands at all times and take one step at a time.

ERECTING THE CANOPY

- 1、 The canopy should be erected using the two steel rods included with your tent.
- 2、 Climb half-way up the ladder, take one rod, and gently insert the straight end into one of the holes located at the top of the ladder (pictured below). The hook at the top end of the rod should be facing down.



- 3、 Repeat for both sides

CLOSING THE HARD SHELL

WARNING: Before closing the tent, you **MUST** take down two locking rods on the gas struts.

- 1、 Remove canopy rods from the canopy
- 2、 Using the ladder, push the extension panel up and then into the tent.
- 3、 Retract the ladder, starting with the bottom steps. Make sure to press the release buttons with your thumbs and be careful not to get any fingers caught between steps.



- 4、 Grab the black nylon strap attached to the top of the shell (you may need the help of the rods of the canopy to reach the strap). Pull down on the strap to close the hard shell.



- 5、 Tuck the excess material into the tent on the front, back and side.



- 6、 Pull down the straps, and securely fasten the fastening and reinforced straps.



- 7、 The fastening and reinforced straps keep your tent closed. ALWAYS make sure that the hard shell is completely closed and the straps are securely fastened before driving.
- 8、 If you find it difficult to completely close the tent, it may be due to excess bedding left inside the tent. In this case, remove some of the bedding and try again.

Note: the recommended speed limit when having the tent on your vehicle is 75MPH/120km/h. Driving speed should always be adjusted according to the current driving conditions, such as road type and quality, weather (wind conditions, rain), and applicable speed limits. Drive slowly on speed bumps and bumpy roads.

All technical data and photos are subject to change due to upgrading without notice.



866.220.0171 | SUPPORT@TUFFSTUFF4x4.COM

Limited Manufacturers Warranty

What is covered

Tuff Stuff Overland warrants to the original purchaser that its products are free from manufacturer defects in material and workmanship, for the term described, except as qualified below.

What is not covered

Tuff Stuff Overland is not be responsible for the natural breakdown of materials that occurs with extended use (e.g., Ultra Violet (UV) light damage on tents, extensive use of zippers), or defects caused by accident, abuse, alteration, animal attack, storm damage, misuse or improper care.

THERE ARE NO OTHER EXPRESS WARRANTIES BEYOND THE TERMS OF THIS LIMITED WARRANTY. IN NO EVENT SHALL Tuff Stuff Overland BE LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you.

What Tuff Stuff Overland will do.

If after inspection we find that a product failed due to a manufacturing or material defect, we will repair or replace the product, at our option, without charge.

How to obtain warranty service

Return the product, freight prepaid, to Tuff Stuff Overland; or, contact Tuff Stuff Overland Customer Care Department for return authorization: toll free 866-220-0171. Warranty shipments without return authorization cannot be accepted and will be returned at the customers expense. Please provide the RA# on all products.

How state law relates to this warranty

This warranty gives you specific legal rights. You may have other rights that vary from state to state.

Warranty term

Limited 12 Month warranty applies to all tent components including base, aluminum poles, ladder, fabric and seams.

WHAT PEOPLE ARE SAYING ABOUT US

Rated 4.7 out of 5 based on 1,254 reviews on Trustpilot

Review	Rating	Time
I thought the service was very good, given this Caron's virus panic-demic, yes spelled...	5 stars	2 hours ago
Great customer service! I ordered a bed rack and the very next day got a call that a tent I'd ordered elsewhe...	5 stars	2 days ago
Very happy! Very happy with the customer service I have received!	5 stars	2 days ago
Great Skid Plate! Product arrived the next day. Super thick and heavy. Im very happy with the skid plat...	5 stars	3 days ago

CUSTOMER CARE

Email:

Support@tuffstuff4x4.com

Telephone:

1-866-220-0171 Monday - Friday 8:30 - 5:00pm California Time

Tuff Stuff USA Headquarters: 2205 South Wright St, Santa Ana California USA

WELCOME TO THE TRIBE



tuffstuffoverland



emmaterres17



trail_benders_overland



sabrinaskiles



tuffstuffoverland naui



tuffstuffoverland



tuffstuffoverland naui



trail_benders_overland



overland_az



emmaterres17



tuffstuffoverland



readyssetgordon