



RTX-700-CUT

Dakota Digital RTX Instrument Installation
For 1970-72 Oldsmobile Cutlass

Your new RTX-700-CUT kit includes:

RTX Display



Universal Sender Pack




Buzzer



Installation Manuals



Switch Assembly

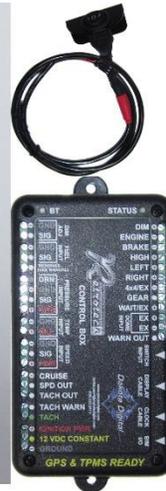

(9) 3/4" Screws



Interconnect Harness



Clock Harness




Main Harness

Control Box

Installation


1. Remove the stock gauge cluster from the dash and save all hardware for reassembly.

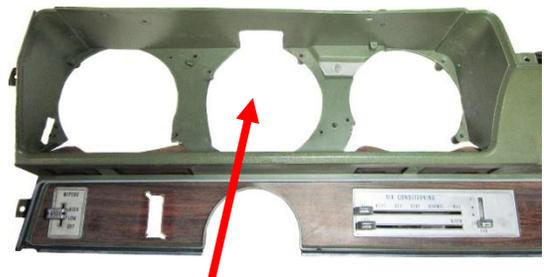


Stock Bezel and Gauges Removed

Manual # 650818

2. With the stock gauges removed, you can now mount the RTX system to the instrument housing by using the nine (9) provided $\frac{3}{4}$ " screws in the original screw holes.

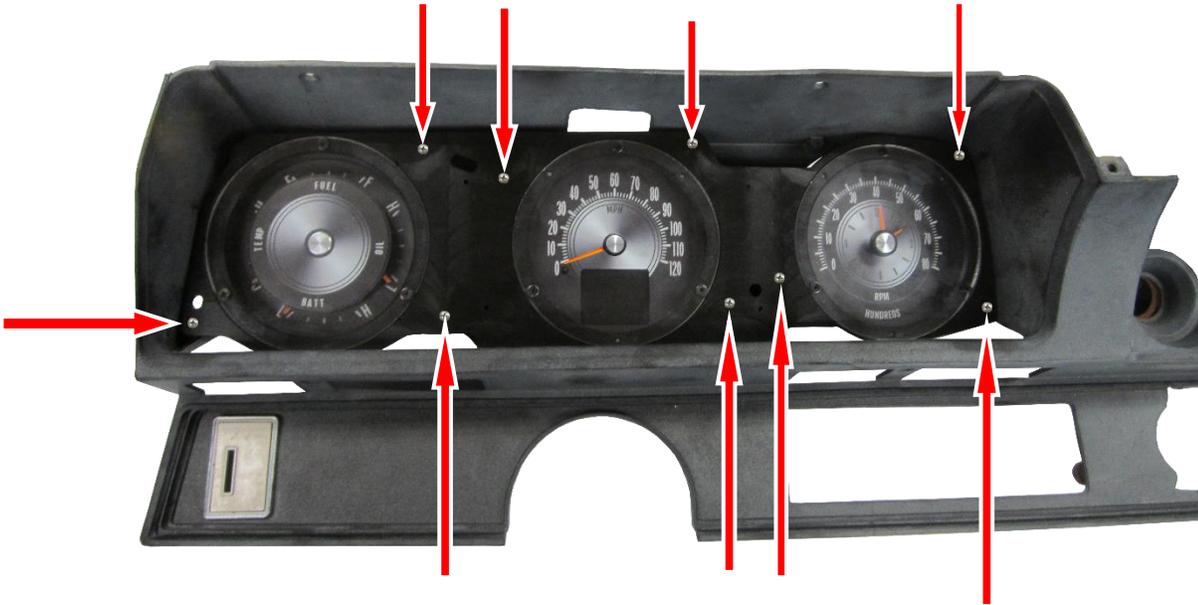

3. With the system mounted in the dash you will need to make connections with the provided cables. Attach the interconnect harness to the main 36" harness. Attach one end of the interconnect harness to the tach, speed, and quad gauges as shown in the image below. Next to the speed input is the buzzer (optional for audio feedback).

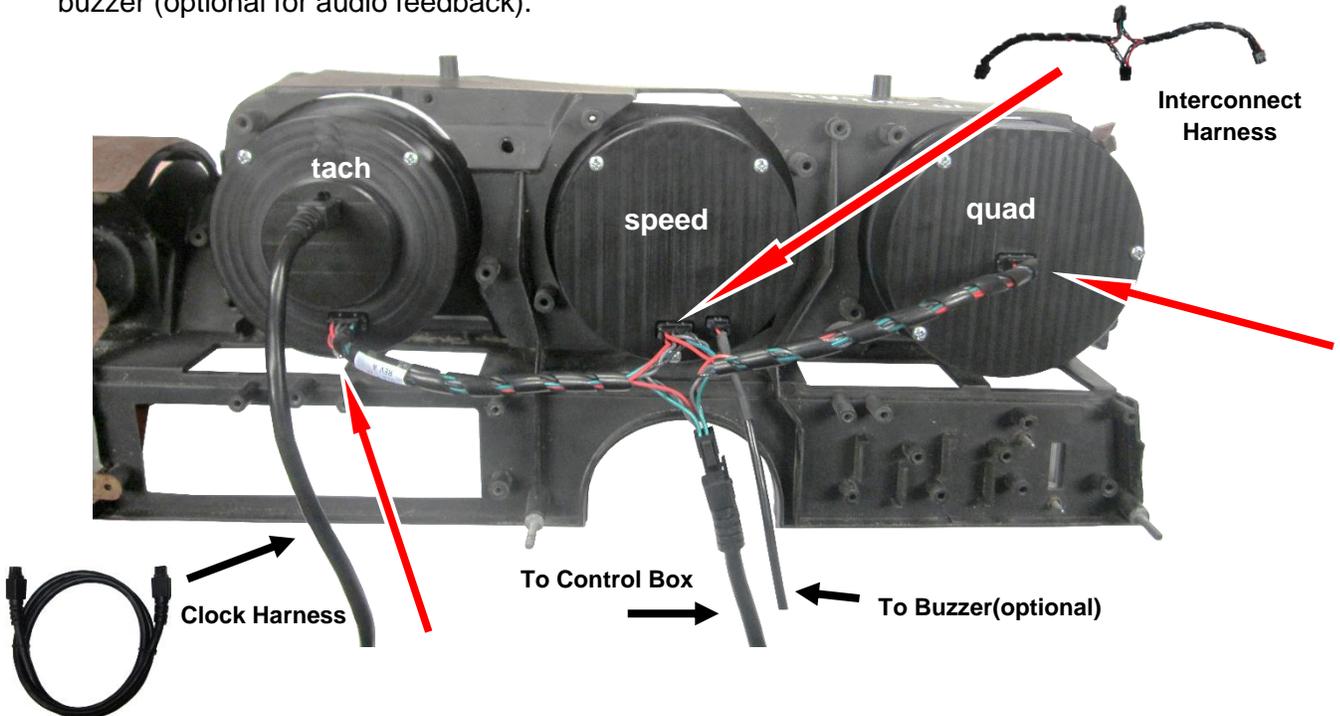

4. Re-install the gauge bezel to the dash housing using the factory hardware and refer to the main manual for wiring instructions to complete the RTX installation.



⚠ WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov



4510 W. 61st St. North
Sioux Falls, SD 57107
www.dakotadigital.com
dakotasupport@dakotadigital.com

Phone (605) 332-6513
Fax (605) 339-4106

© Copyright 2023 - Dakota Digital