

VERUS ENGINEERING

Toyota GR86/Subaru BRZ Two-Piece Front Splitter Kit and Air Dam

Install Manual



Author: Tom Lang
Release Date: 2022/09/07
Approvals: C. Warner

Document Revisions

Rev	Date	Author	Description
01	2022/09/07	T. Lang	Initial release of install manual

Toyota GR86 Two-Piece Street Front Splitter and Race Upgrade – Install Manual

CONTENTS

1. Introduction.....	<3>
1.1. Overview.....	<3>
1.2. Difficulty.....	<3>
1.3. Time Required.....	<3>
1.4. Tools Needed	<3>
1.5. Splitter Components	<4-5>
1.6. Air Dam Components.....	<4-5>
2. Front Splitter Install.....	<5-19>
3. Air Dam Install.....	<19-26>

Toyota GR86 Two-Piece Street Front Splitter and Race Upgrade – Install Manual

1. Introduction

1.1. Overview: Detailed instructions on installing the front splitter with race upgrade, and air dam on the Toyota GR86. The air dam is not necessary for installation but improves performance and looks of the splitter.

1.2. Difficulty: Beginner to Moderate

1.3. Time Required: 2.5-3 hours

1.4. Tools Needed:**1.4.1. Splitter + Race Upgrade Install**

- 1.4.1.1. Jack and Jack Stands
- 1.4.1.2. Screwdriver or push clip remover
- 1.4.1.3. 10mm Socket
- 1.4.1.4. 4mm Allen Wrench
- 1.4.1.5. 5mm Allen Wrench
- 1.4.1.6. 9/16" wrench
- 1.4.1.7. Center Punch
- 1.4.1.8. 1/8" or starter drill bit
- 1.4.1.9. 1/4" drill bit or step bit
- 1.4.1.10. 3/8" drill bit or step bit
- 1.4.1.11. Countersink bit
- 1.4.1.12. Drill
- 1.4.1.13. Touch up paint
- 1.4.1.14. Side Cutters



Confidential: Property of Verus Engineering. Not for Distribution outside intended recipient list.

Toyota GR86 Two-Piece Street Front Splitter and Race Upgrade – Install Manual


1.5. Splitter Kit Components

- 1.5.1. (1) Front Splitter
- 1.5.2. (2) Left-hand rod end
- 1.5.3. (2) Right-hand rod end
- 1.5.4. (2) Splitter Tie
- 1.5.5. (2) Threaded Billet Aluminum Clevis Mount
- 1.5.6. (2) Pre – Drilled Billet Aluminum Clevis Mount
- 1.5.7. (1) Support Brace
- 1.5.8. (1) Two-Piece Splitter Bracket
- 1.5.9. **(1) Hardware Bag**
 - 1.5.9.1. (9) M6 x 1.0 Button Head Cap Screw (BHCS) x 40mm Long, Stainless Steel
 - 1.5.9.2. (2) M6 x 1.0 BHCS x 45mm Long, Stainless Steel
 - 1.5.9.3. (2) M6 x 1.0 BHCS x 60mm Long, Stainless Steel
 - 1.5.9.4. (12) M6 x 1.0 BHCS x 25mm Long, Stainless Steel
 - 1.5.9.5. (2) M6 x 1.0 Low Profile Socket Head Cap Screw x 25mm Long, Stainless Steel
 - 1.5.9.6. (15) M6 x 38mm Diameter Fender Washer
 - 1.5.9.7. (8) M6 x 18mm Diameter Washer
 - 1.5.9.8. (9) M6 x 1.0 Plastic Rivets
 - 1.5.9.9. (2) M6 x 1.0 Steel Rivets
 - 1.5.9.10. (1) Rivet Nut Install Tool
 - 1.5.9.11. (2) Rivet Nut Install Bolts
 - 1.5.9.12. (6) 15mm Nylon Spacers
 - 1.5.9.13. (13) 5mm Nylon Spacers
 - 1.5.9.14. (14) M6 x 1.0 Flanged Nuts
 - 1.5.9.15. (4) 12mm OD M6 Washers, Stainless Steel

1.6. Air Dam Kit Components

- 1.6.1. (1) Left Side Air Dam
- 1.6.2. (1) Right Side Air Dam
- 1.6.3. (12) M6 x 1.0 Serrated Flange Nut
- 1.6.4. (10) M6 x 1.0 x 25mm Long BHCS
- 1.6.5. (2) M6 x 1.0 x 20mm Long FHCS
- 1.6.6. (1) M4 x .7 12mm Long BHCS
- 1.6.7. (1) M4 x .7 Nyloc Nut
- 1.6.8. (1) M4 x .7 Fender Washer
- 1.6.9. 80" Rubber Edge Guard

Toyota GR86 Two-Piece Street Front Splitter and Race Upgrade – Install Manual

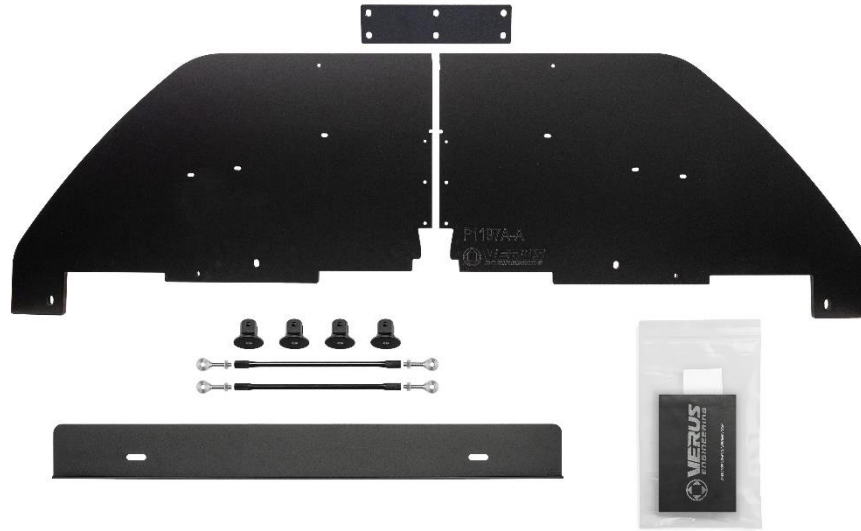

2. Front Splitter Install

2.1. Verus Engineering is not responsible for damage to you or your vehicle by following this manual and/or installing Verus Engineering products.

2.2. We begin by jacking the car up. You will want to chock the rear wheels and use the e-brake.

Confidential: Property of Verus Engineering. Not for Distribution outside intended recipient list.


Toyota GR86 Two-Piece Street Front Splitter and Race Upgrade – Install Manual

- 2.3. Place a jack stand on either side of the car, you can use the frame rails or the pinch welds.
- 2.4. With the front of the car off the ground, we will want to start by removing the splash guard. We need to create an opening so that we can install the splitter rods on the crash bar. This requires three parts to be removed. These parts all connect to each other we will simply start by removing all of the **push clips** and 10mm head **bolts** in the circled areas shown below.



- 2.5. Next, we will remove the push clips that attach the fender liner to the bumper splash guard. Do this on both sides.

Toyota GR86 Two-Piece Street Front Splitter and Race Upgrade – Install Manual

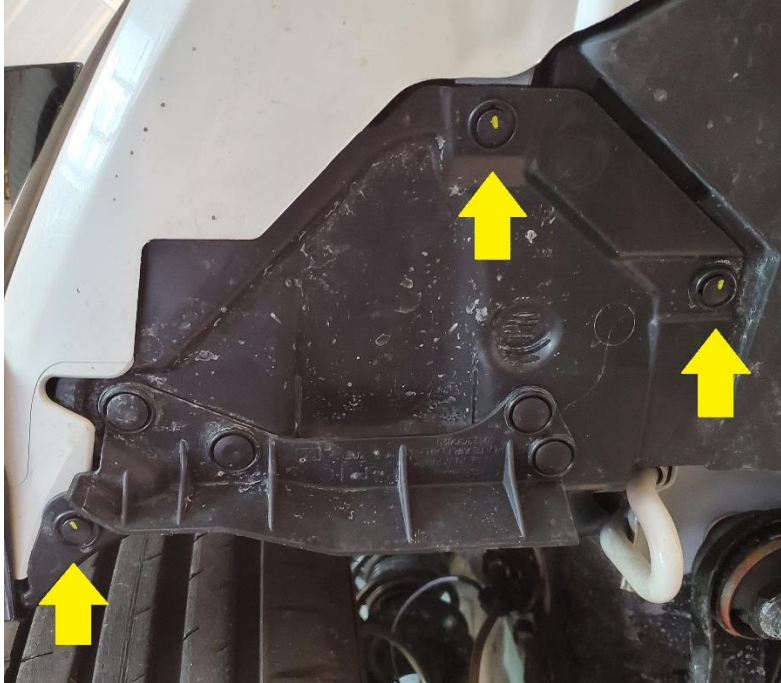

- 2.6.** We are now able to remove the last push clip holding the bumper splash guard on. Pull the fender liner down and remove the clip shown on both sides. You can put the bumper splash guard aside as it will not be re-installed.



- 2.7.** With the splash guard removed, we can now remove the lower radiator support splash shield. Most of the hardware holding this part in should have been removed in **2.4**. All that


Confidential: Property of Verus Engineering. Not for Distribution outside intended recipient list.

Toyota GR86 Two-Piece Street Front Splitter and Race Upgrade – Install Manual

should be left are three 10mm head bolts. Remove the bolts, and the radiator support splash shield.



- 2.8.** Finally, remove the bumper cover support brace by removing the two clips holding it in from the top.

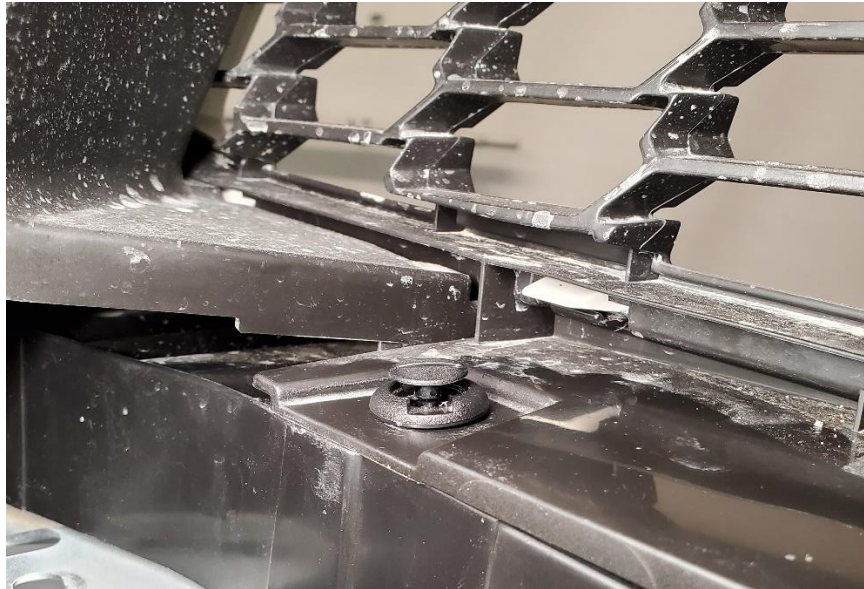


- 2.9.** Install five M6 Plastic rivet nuts into the bumper cover support brace. Use the holes that the push clips came out of (The holes can be identified by a “star” shaped pattern surrounding them). Open the holes up with a 3/8” drill bit if needed. Make sure you install the rivet nuts on the correct side. You should be installing them into the side shown below.

Confidential: Property of Verus Engineering. Not for Distribution outside intended recipient list.

Toyota GR86 Two-Piece Street Front Splitter and Race Upgrade – Install Manual



2.10. Use the following diagram to install the rivet nuts.

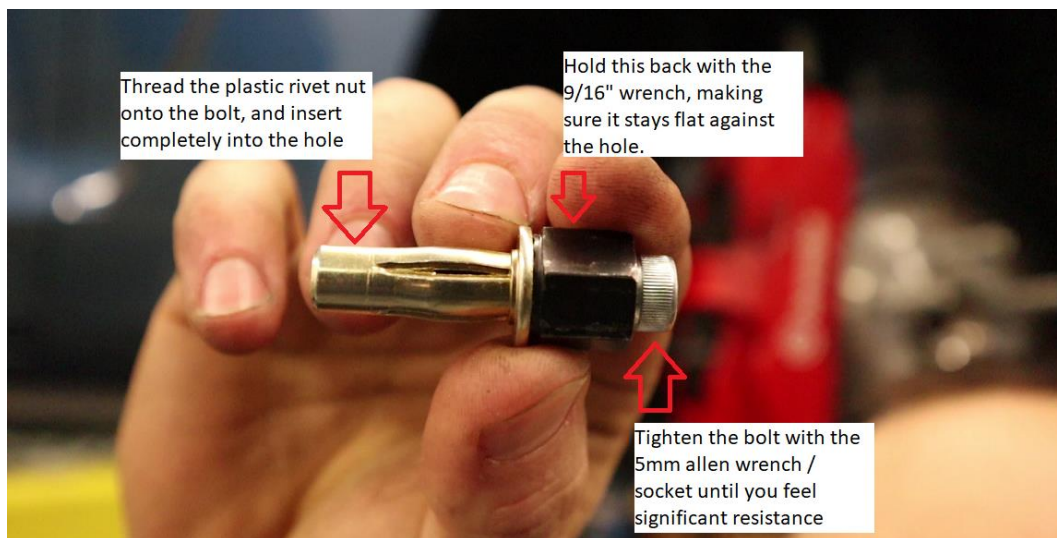


2.11. Using a 9/16" wrench and the 5mm Allen wrench, hold the nut steady and tighten the allen bolt. You will have some initial resistance, and then the rivet nut will begin to pull tighter on the material. **Use oil on the threads to ensure they do not gall.** Alternatively, you can purchase or rent a rivet nut install tool from your local hardware store or automotive store.

Confidential: Property of Verus Engineering. Not for Distribution outside intended recipient list.

Toyota GR86 Two-Piece Street Front Splitter and Race Upgrade – Install Manual

2.12. Below is an example of fully installed rivet nut.

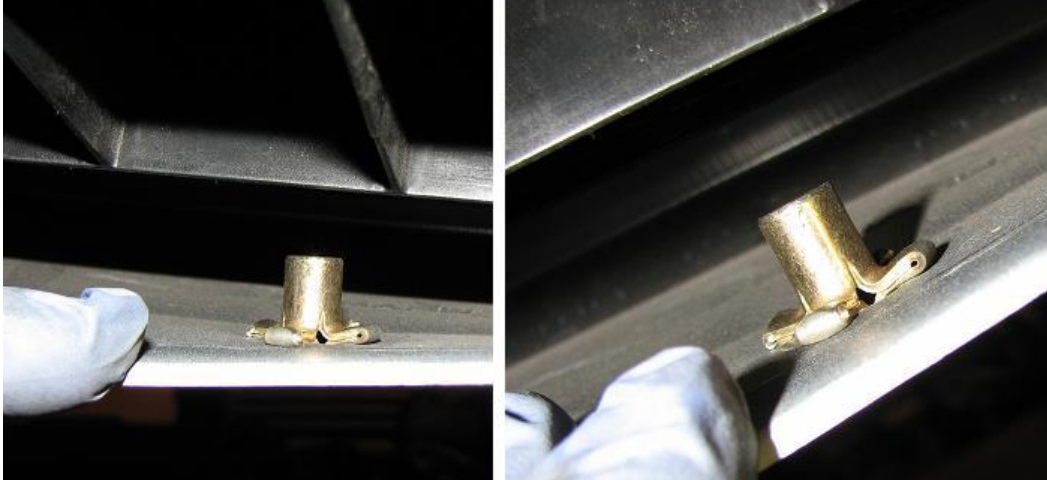


2.13. Re-install the bumper cover support brace back into the bumper.




2.14. To install the splitter rods we will need to measure the point to drill for rivet nut installation. Looking upward at the crash bar, locate the two slotted holes.

Toyota GR86 Two-Piece Street Front Splitter and Race Upgrade – Install Manual

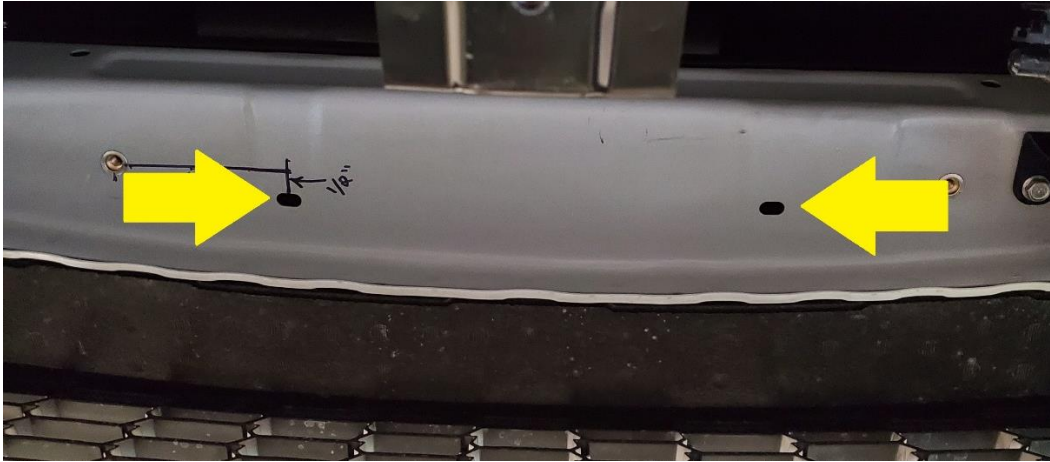

- 2.15.** Measure from the edge of the slot 0.5" towards the rear of the car (towards radiator). From there, measure 3" outwards from the outer edge of the slot towards the side of the vehicle. Mark that point, and drill it to 3/8". Repeat the process for the opposite side.

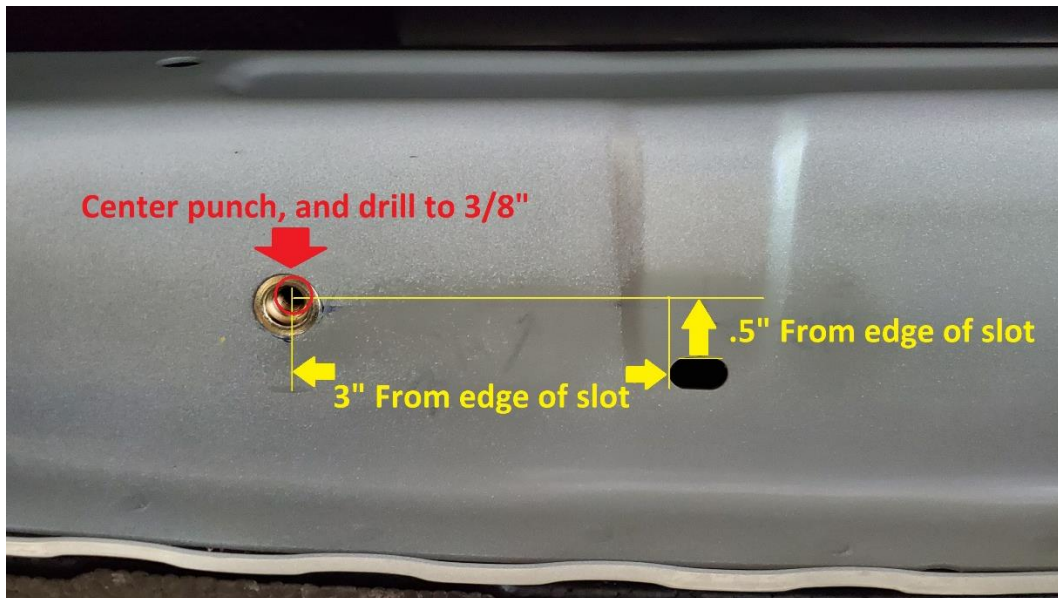

- 2.16.** Once the holes are drilled to 3/8" touch up the raw edges with touch up paint.
- 2.17.** Install the steel rivet nuts using the same instructions as in **2.10**

Toyota GR86 Two-Piece Street Front Splitter and Race Upgrade – Install Manual



- 2.18.** Grab **TWO** pre-drilled clevises with no threads, note the below image, the center hole has no threads in it.



- 2.19.** Using two low profile 25mm long SHCS, slide them through the top of the clevises and thread them into the rivet nuts just installed. Orient them parallel with the front of the car as shown, and torque to 6 ft-lbs.

Toyota GR86 Two-Piece Street Front Splitter and Race Upgrade – Install Manual



- 2.20.** Assemble both splitter ties as shown below. Please keep in mind, the splitter rod has a left hand and a right hand threaded side, same as the rod ends and lock nuts. Use the correct rod end and nut on each side during assembly.




- 2.21.** Trim the grille to accommodate the splitter ties. Use a pair of side cutters and simply cut out one horizontal piece as shown below.

Toyota GR86 Two-Piece Street Front Splitter and Race Upgrade – Install Manual



- 2.22.** Bolt the splitter tie to the clevises using 25mm BHCS, 12mm washer, and M6 serrated flange nut. Do this for both sides. Torque the bolts to 6ft-lbs. The washer should be on the bolt head side.

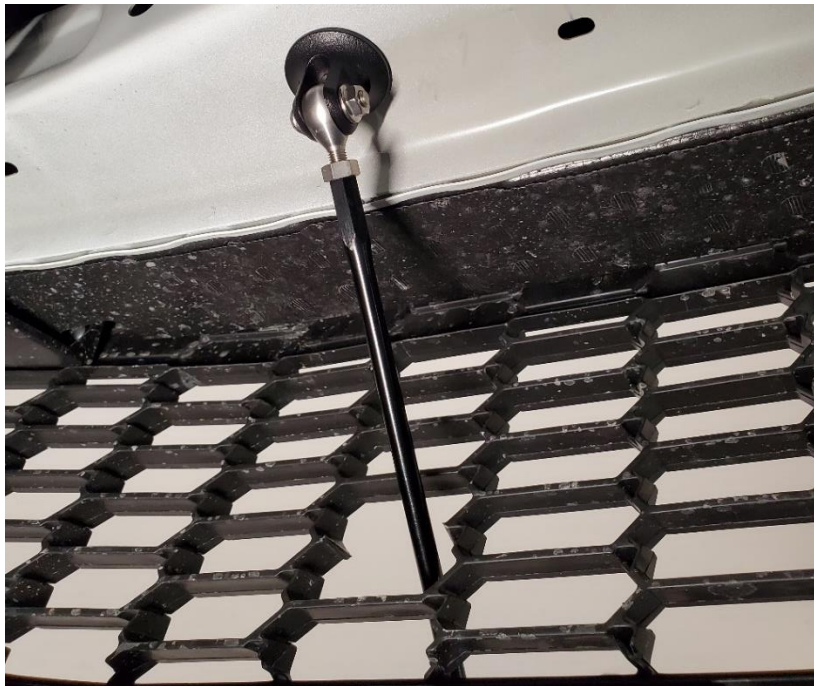


Confidential: Property of Verus Engineering. Not for Distribution outside intended recipient list.

Toyota GR86 Two-Piece Street Front Splitter and Race Upgrade – Install Manual

- 2.23. Re-install the radiator support splash shield with only the three bolts.




- 2.24. Next, we will begin putting the splitter up using seven 40mm BHCS, fender washers, and 5mm spacers in the holes shown below. Starting in the middle, and working your way outward is the easiest way to get this done. Do not tighten the bolts down at this time.

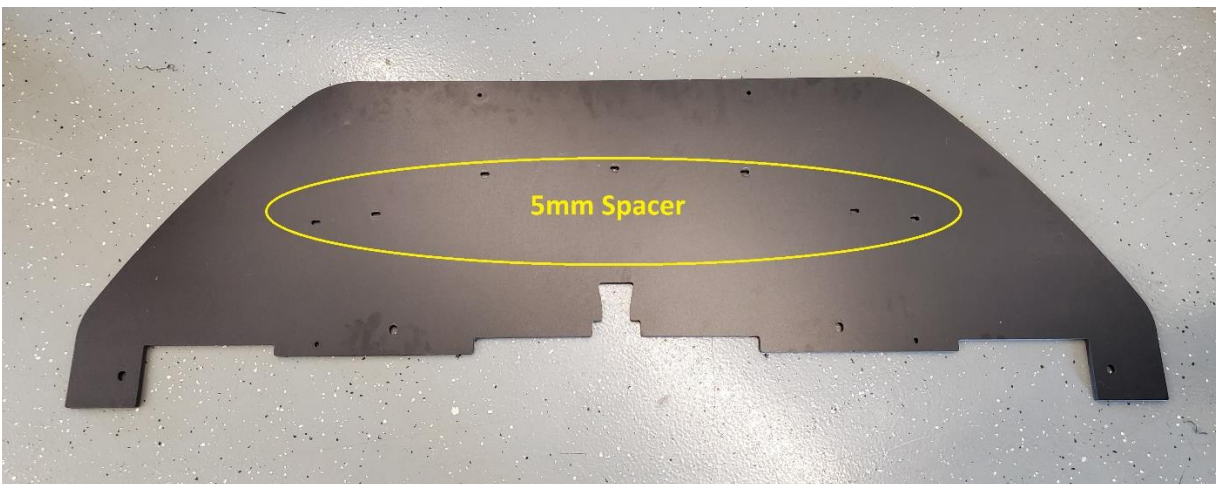

**** Two-Piece Splitter owners should bolt the two halves of the splitter together at this time. Use the Two-Piece Splitter Bracket with six 25mm BHCS, 18mm washers, and serrated flange nuts. The button heads should be facing the ground as shown below. Torque to 6 ft-lbs.**

Toyota GR86 Two-Piece Street Front Splitter and Race Upgrade – Install Manual

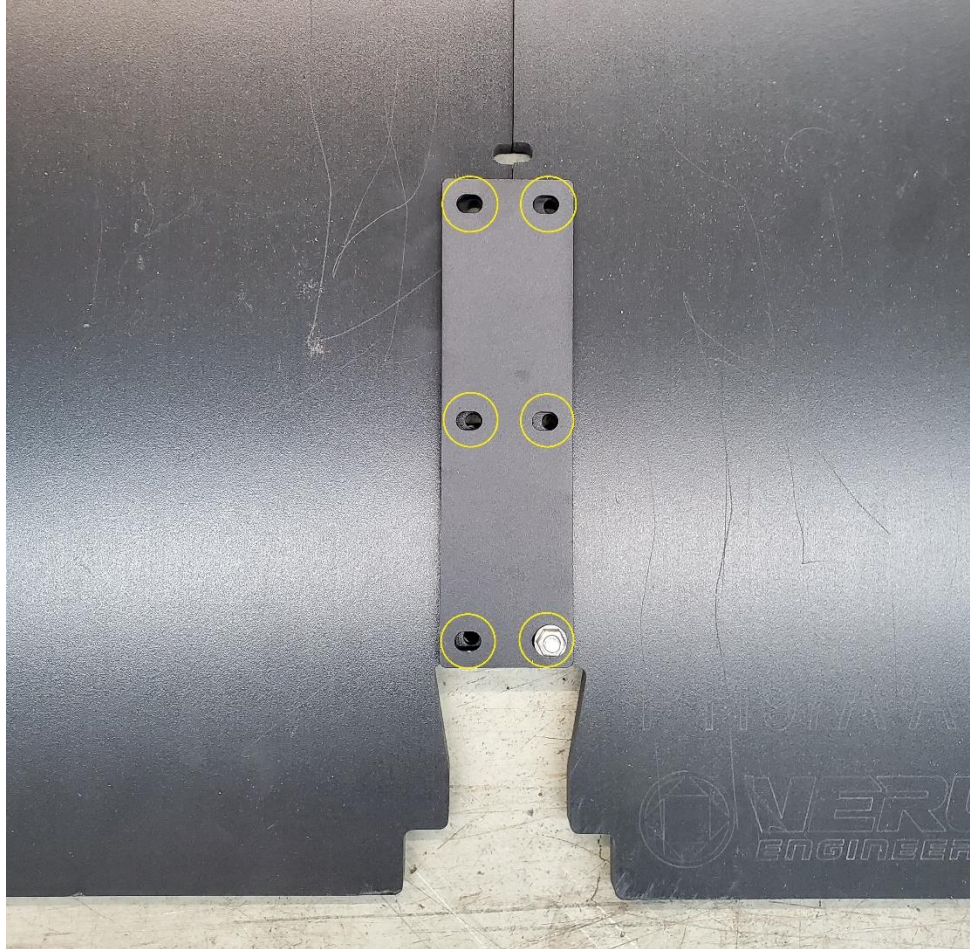

- 2.25.** This is now the best time to adjust the length of the splitter ties. Tighten the bolts installed in 2.24, and temporarily install the remaining two clevises to the splitter with the race support bracket. ****NOTE**** If you are also installing the Air Dam now is a good time to start that process. For instructions on Air Dam installation skip to **3.1**.
- 2.26.** Use two 25mm BHCS, fender washers, and race support bracket, bolt the support bracket to the splitter. Torque to 6 ft-lbs. If you are installing an air dam, note that the race support bracket covers the center two bolts for the air dam. If that is the case make sure the air dam is flush against the bumper in this area, and tighten the air dam bolts. **DO NOT** over tighten these air dam bolts. A quarter turn after bottoming out will be sufficient.

Toyota GR86 Two-Piece Street Front Splitter and Race Upgrade – Install Manual




- 2.27.** Once you verify a bolt can be easily installed through the splitter clevis and the splitter tie rod ends, tighten the jam nuts on the splitter ties. Continue with the rest of the splitter installation. You can leave the splitter ties with the bolts through them, but do not tighten them at this time.



- 2.28.** Use two 45mm long BHCS, fender washers, 15mm, and 5mm nylon spacers to bolt the splitter to the radiator support splash shield on both sides (the plastic cover with the metal U-nut). This is shown below.


Toyota GR86 Two-Piece Street Front Splitter and Race Upgrade – Install Manual

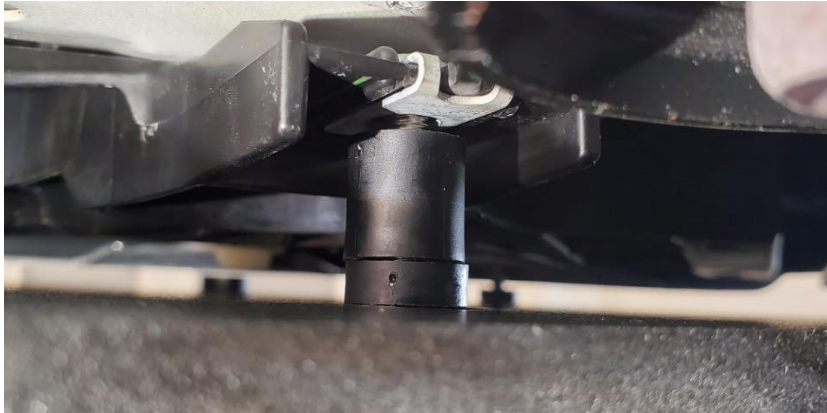

- 2.29. Then, using the 60mm BHCS, fender washer, two 15mm nylon spacers, one 5mm nylon spacer, and M6 serrated flange nut to bolt the splitter to the lower radiator support. Do this on both sides. This is shown below.

Confidential: Property of Verus Engineering. Not for Distribution outside intended recipient list.

Toyota GR86 Two-Piece Street Front Splitter and Race Upgrade – Install Manual

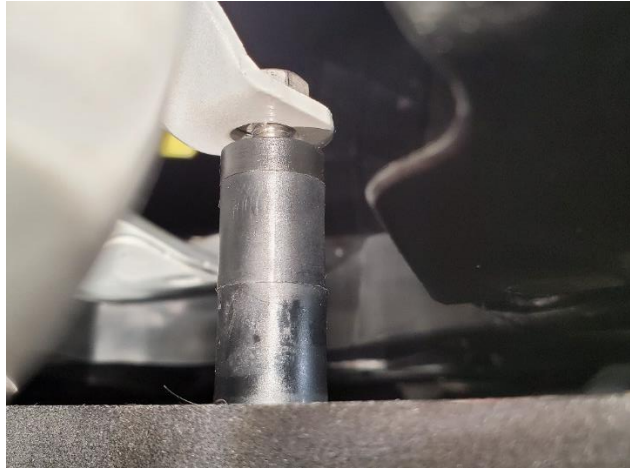

- 2.30.** Finally, use two 40mm BHCS, fender washers, 5mm nylon spacer, 18mm washer, and M6 serrated flange nut to bolt the splitter to the last outer hole on the bumper (closest to the wheel well). You will need to push the fender liner to the side to get the nut and washer above the bumper as shown. **BRZ Install Note:** BRZ models do not have pre-drilled holes in

Confidential: Property of Verus Engineering. Not for Distribution outside intended recipient list.


Toyota GR86 Two-Piece Street Front Splitter and Race Upgrade – Install Manual

these locations. Use the splitter blade as a template to drill a hole in this location using a ¼” drill bit, then install as written above.



2.31. To double check the spacer arrangement use the diagram below.

Toyota GR86 Two-Piece Street Front Splitter and Race Upgrade – Install Manual

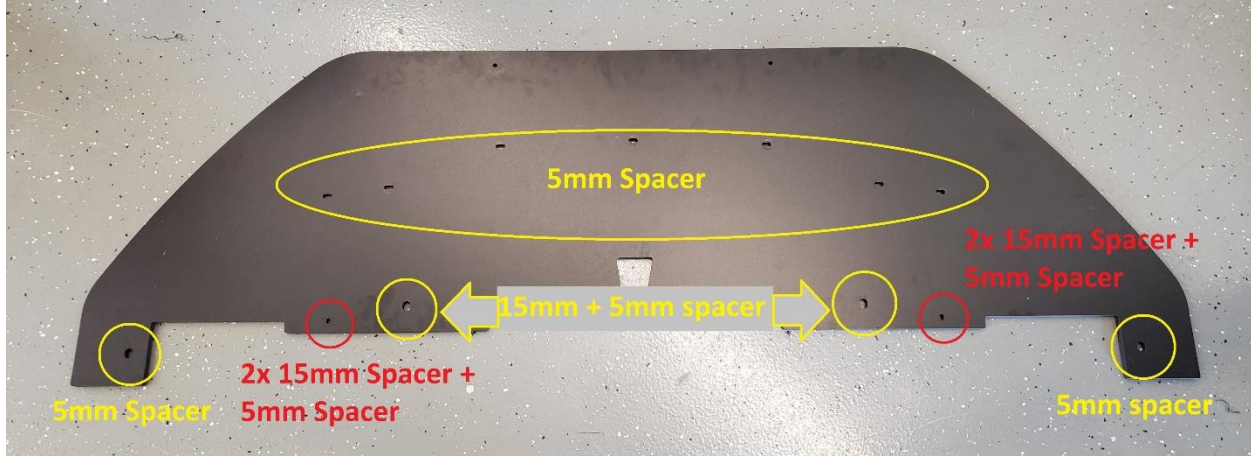

- 2.32. With all the bolts properly started, begin tightening them down to 6 ft-lbs working from the middle out.
- 2.33. Finally, tighten the 25mm BHCS, 12mm washer, and M6 serrated flange nut holding the splitter ties to the clevises.



- 2.34. If applicable, tighten the remaining air dam bolts while making sure the air dam is flush against the bumper.

Confidential: Property of Verus Engineering. Not for Distribution outside intended recipient list.

Toyota GR86 Two-Piece Street Front Splitter and Race Upgrade – Install Manual


2.35. Congratulations! You have just completed installation of the Verus Engineering Front Street Splitter and Race Upgrade! For installation instructions to install the Air Dam, continue to **3.1**.

3. Front Air Dam installation.

3.1. To start make sure the splitter is at least temporarily installed to the bumper. At the very least the splitter needs to be flat up against the bottom of the bumper in a way that resembles the final installation.

3.2. Place some tape down on the splitter where the air dam will sit. This will protect from scratches during the fitting up process which will happen shortly.

3.3. Find the center of the splitter. This will determine the “starting point” for the center of the Air Dam. The picture below is for reference only, we suggest using the bolt slots to aid in finding the center.

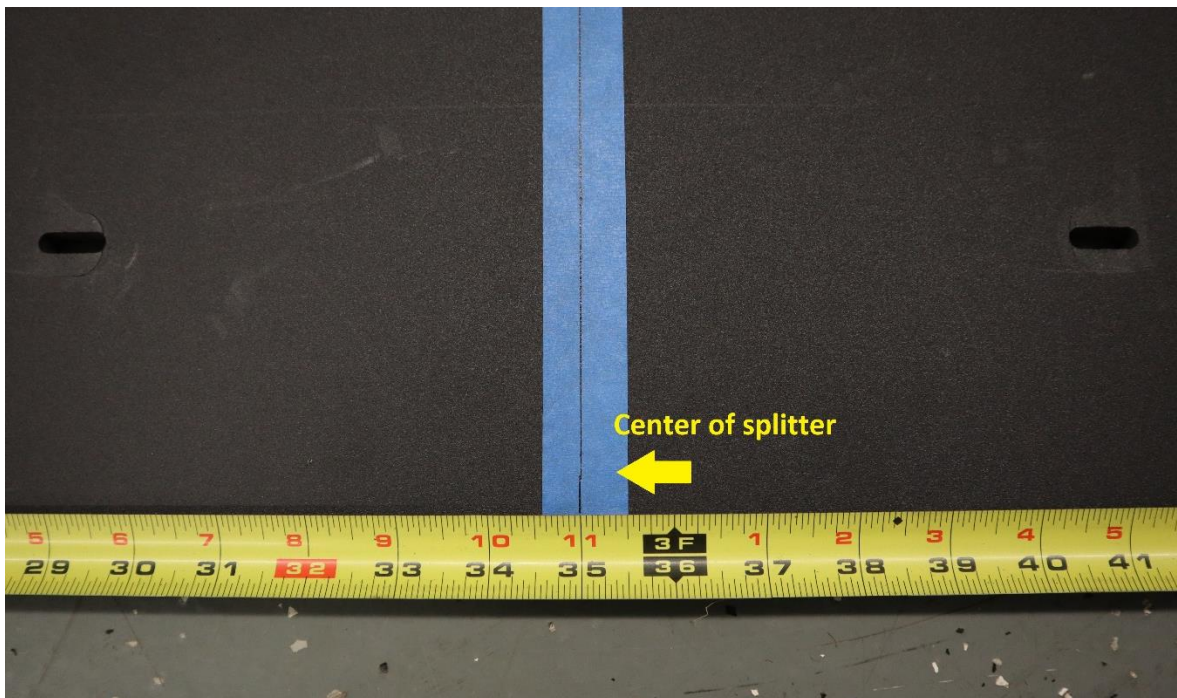


3.4. From the center, begin forming the Air Dam to the contour of the bumper. The Air Dam bends fairly easily by hand. Be sure to make smaller adjustments, and take your time.

Toyota GR86 Two-Piece Street Front Splitter and Race Upgrade – Install Manual




- 3.5. Repeat this process for the opposite side as well.
- 3.6. Once the Air Dam pieces are formed, place them on the splitter, and flush against the bumper. Trace an outline of where the air dam will sit.

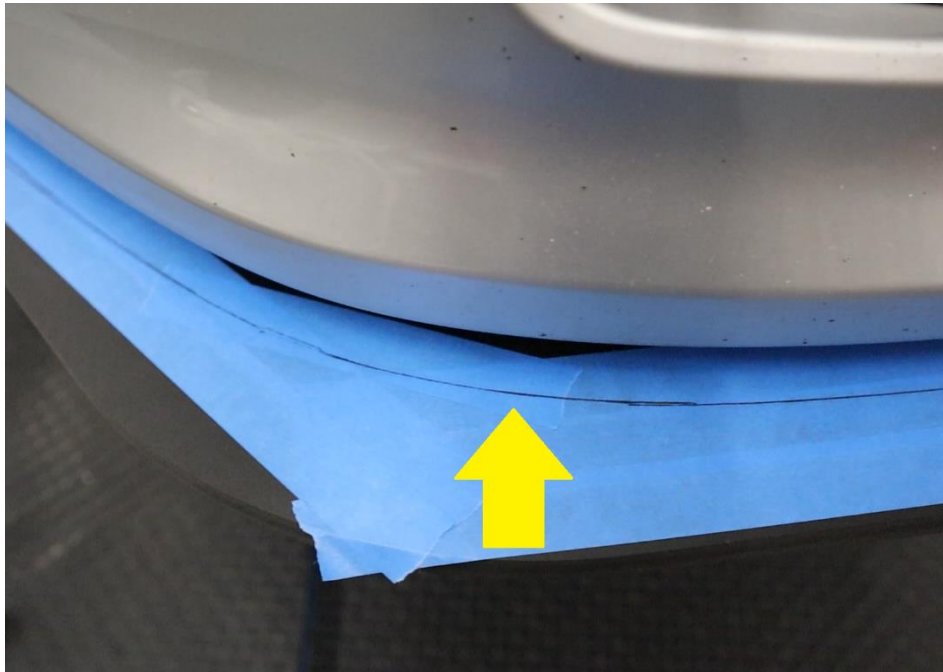

- 3.7. Remove the splitter.
- 3.8. Set the Air Dam on the splitter along the line traced in 3.6, and begin marking the bolt holes, and center punching them.

Confidential: Property of Verus Engineering. Not for Distribution outside intended recipient list.

Toyota GR86 Two-Piece Street Front Splitter and Race Upgrade – Install Manual

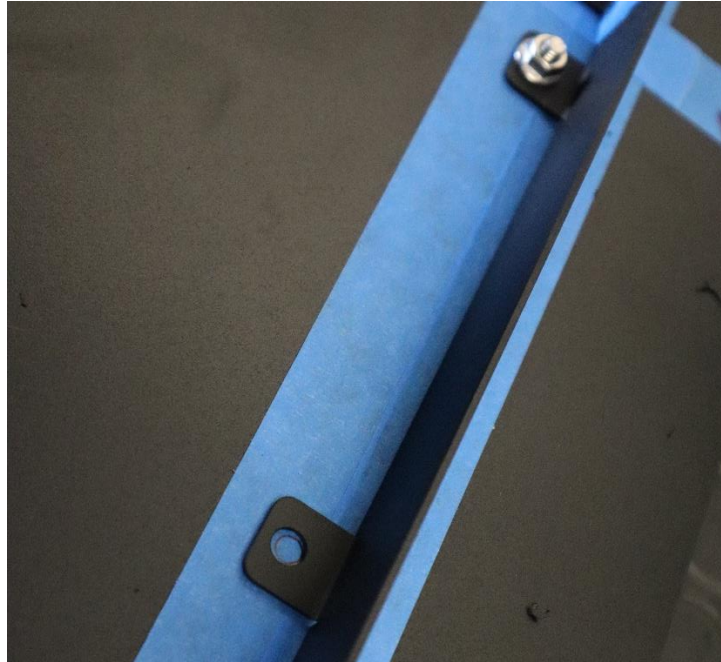

3.9. Drill the bolt holes with a 1/4" drill bit.

3.10. Start by attaching the air dam halves together by using the 12mm long BHCS, 12mm washers, and serrated nuts. You can make sure these two bolts are 100% tight at this point.

3.11. The two center bolts (first bolt of each air dam piece at the center of the car) will be the two 20mm long FHCS that are supplied. Use a countersinking bit to create a flush mounting surface for the FHCS. Be sure that you are doing this to the **BOTTOM** side of the splitter.



Toyota GR86 Two-Piece Street Front Splitter and Race Upgrade – Install Manual



- 3.12.** Using two M6 serrated flange nuts loosely install the two FHCS from the bottom of the splitter.




- 3.13.** For the rest of the bolts, loosely install the air dam onto the splitter using the 25mm long BHCS and 18mm fender washers on the bottom side with a serrated flange nut on the top side. Only install the nuts hand tight initially. Once the splitter is on the car, we can make final adjustments for the air dam before fully tightening it down. Below is what the splitter should look like before getting installed on car.

Toyota GR86 Two-Piece Street Front Splitter and Race Upgrade – Install Manual



- 3.14.** Before installing the splitter on the car, install the supplied rubber edge seal on the top side of the air dam to prevent the air dam from digging into the bumper or paint when installing. This rubber seal also helps seal the air dam with the factory front fascia when it is installed.

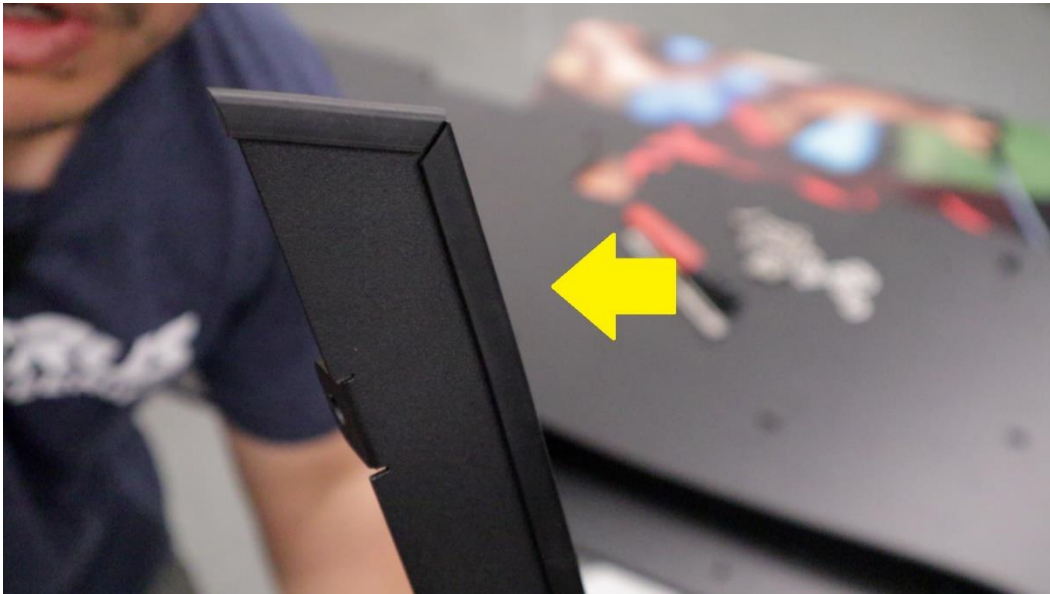

- 3.15.** Go back to **2.25** to complete installation of the front splitter if applicable.
- 3.16.** Congratulations! You have just completed installation of the Verus Engineering Front Air Dam!
- 3.17.** Please contact Verus Engineering with any questions, comments, concerns, and feedback via sales@verus-engineering.com

Confidential: Property of Verus Engineering. Not for Distribution outside intended recipient list.

Toyota GR86 Two-Piece Street Front Splitter and Race Upgrade – Install Manual



Confidential: Property of Verus Engineering. Not for Distribution outside intended recipient list.