




WARNING: By reading this document, you agree it is only to be used as an educational guide. GTR Lighting nor its distributors make guarantees on any finished results, nor are they to be held responsible for any damage, misuse, or personal injuries. Use at your own risk. If you are unable to clearly understand and adapt the information below, professional installation is recommended.


INSTALL GUIDE

STEP 1: DETERMINE IF BULB NEEDS TO BE CLOCKED

The goal when installing Ultra 2 LED headlight bulbs is that the LED chips are pointed to the 3 o'clock and 9 o'clock positions when fitted. If your bulbs install and sit like example A below, no further action is needed. If your bulbs sit like example B below, continue to Step 2.

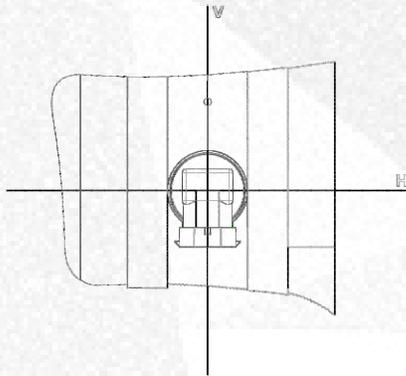


EXAMPLE A

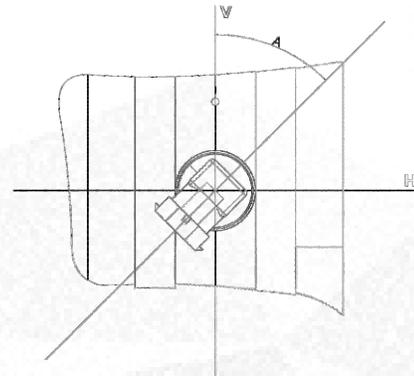


EXAMPLE B

STEP 2: IF NECESSARY, RE-CLOCK BULB


Using the supplied allen wrench, loosen the hex head screws on the bulb collar as shown. Re-orient position of bulbs so that the LED chips are pointed in the 3 o'clock and 9 o'clock positions, and tighten hex head screws.

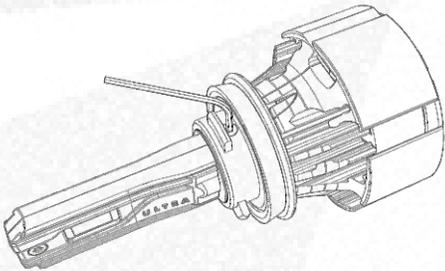

HEX HEAD SCREW LOCATION

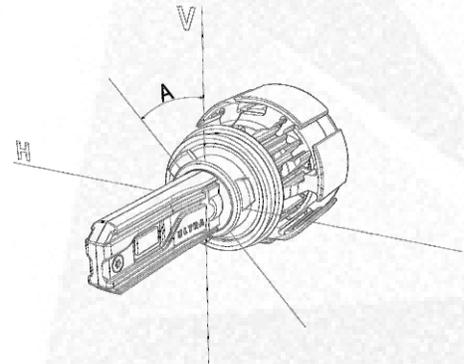

CLOCKING POSITION

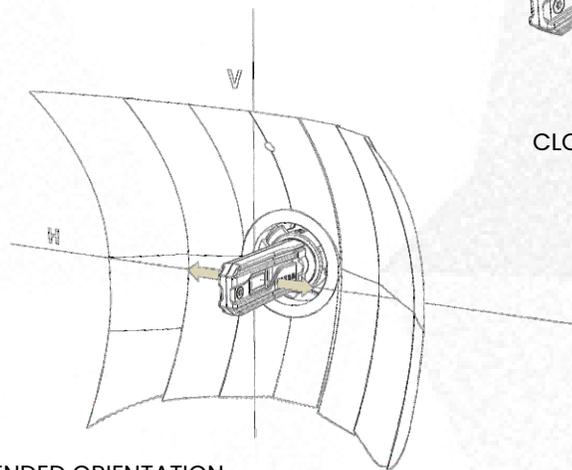

INTENDED ORIENTATION

