

# OFF-ROAD Installations



@MTSOFFROAD

TECH SUPPORT:  
(602) 272-5009

INFO@MTSOFFROAD.COM

POLARIS  
**RZR**  
SPRING KIT

YEAR

2020 +

MODEL

XP PRO

SEAT

4

SHOCK TYPE

WALKER EVANS

## DISASSEMBLY

### FRONT SHOCK & SPRING REMOVAL

1. Jack up the front of the car until arms are at full droop (fully extended)
2. Loosen the top shock bolt 15 mm
3. Loosen the bottom shock bolt 15 mm. Save all factory hardware - It will be reused later during the install process
4. Repeat steps 2 and 3 for the opposite side
5. Remove shocks from car (make sure jack is secured)
6. Compress front springs for removal

**Tech Tip:** Use the flat blade of a screwdriver to pry down foam bump stop. It is important to not damage or scratch the shock shaft during this process


7. Remove factory spring perch and all springs. Keep all spring perches together
8. Remove and discard the factory spring divider. This is the plastic piece separating the springs and it will be replaced with a new MTS Off-Road Spring Divider that has been provided in your Spring Kit
9. Repeat steps 6 - 8 for the opposite side

### REAR SHOCK & SPRING REMOVAL

10. Jack up the rear of the car until arms are at full droop (fully extended)
11. Loosen all 4 rear shock bolts 18 mm. Save all factory hardware - It will be reused later during the install process
12. Compress rear springs for removal

**Tech Tip:** Use the flat blade of a screwdriver to pry down foam bump stop. It is important to not damage or scratch the shock shaft during this process

13. Remove factory spring perch and all springs. Keep all spring perches together
14. Remove and discard the factory spring divider. This is the plastic piece separating the springs and it will be replaced with a new MTS Off-Road Spring Divider that has been provided in your Spring Kit
15. Repeat steps 12 - 14 for the opposite side



# OFF-ROAD Installations



@MTSOFFROAD

TECH SUPPORT:

(602) 272-5009

INFO@MTSOFFROAD.COM

POLARIS  
**RZR**  
SPRING KIT

YEAR

2020 +

MODEL

XP PRO

SEAT

4

SHOCK TYPE

WALKER EVANS

## SET ADJUSTMENTS

### PRELOAD & CROSSOVER MEASUREMENTS

16. Set the preload for all front and rear shocks by measuring from shock end cap to spring contact point
17. Set the crossover ring measurement for all the front shocks by measuring the shock end cap to crossover ring contact point
18. Tighten crossover ring screws 7/64"

#### PRELOAD

FRONT

4 1/4"

REAR

6 1/4"


#### CROSSOVER

FRONT


8"

REAR

11 1/2"

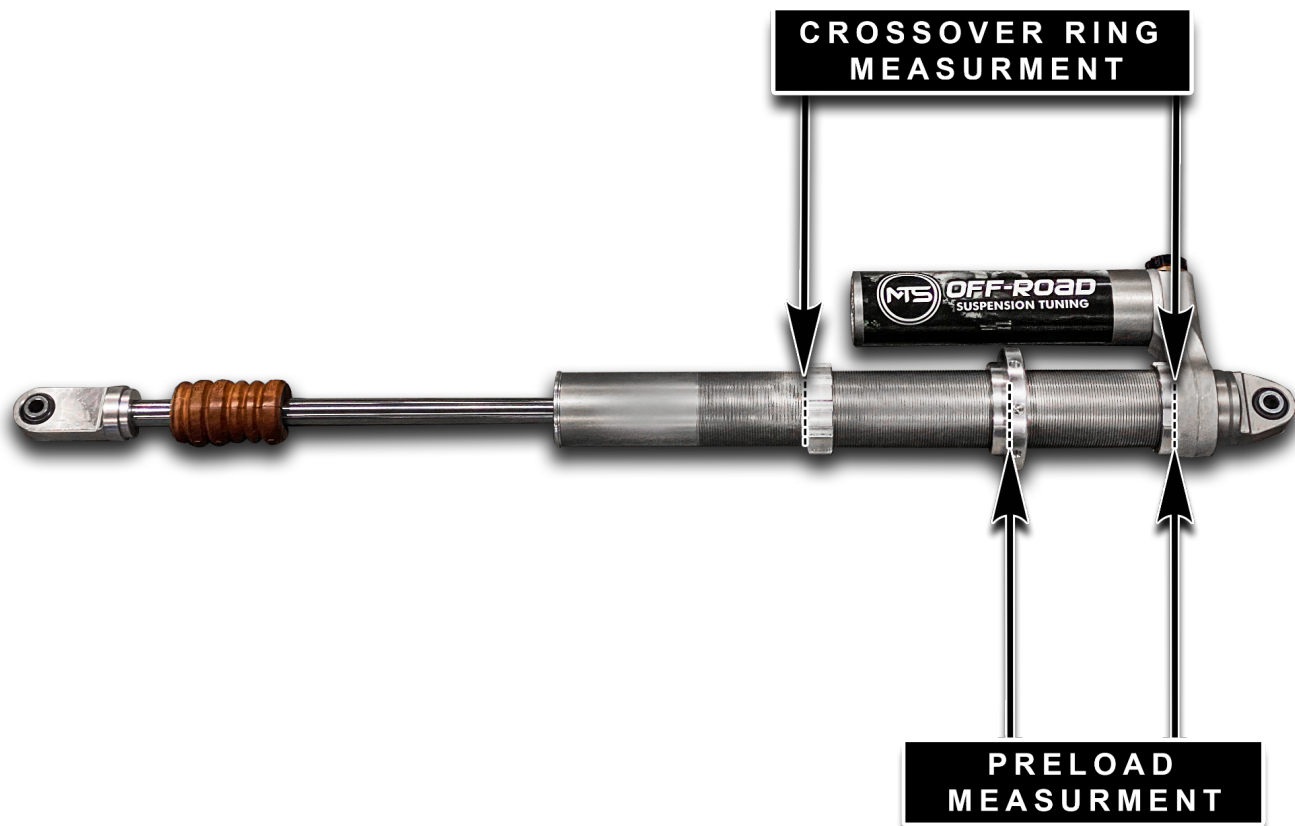

TECH SUPPORT: INFO@MTSOFFROAD.COM | (602) 272-5009 | FOLLOW: @MTSOFFROAD



# OFF-ROAD Installations



@MTSOFFROAD

TECH SUPPORT:  
(602) 272-5009

INFO@MTSOFFROAD.COM

**POLARIS**  
**RZR**  
**SPRING KIT**

**YEAR**

2020 +

**MODEL**

XP PRO

**SEAT**

4

**SHOCK TYPE**

WALKER EVANS

## INSTALLATION

### FRONT SPRING ASSEMBLY

19. Assemble the front shock with new tender spring on first
20. Install new spring dividers that is provided in your Spring Kit with the shorter end closest to the cross over ring (top of shock)
21. Install new main spring by rotating (clocking) the spring ends 180 degrees so they are on the opposite sides of the spring divider
22. Compress spring assembly and install spring perch
23. Release spring tension from spring assembly
24. Repeat steps 19 - 23 for the opposite side

### FRONT SHOCK INSTALL


25. Reinstall the front shocks using your factory hardware that was saved from the disassembly. Do not tighten factory bolts yet - the shocks may have to come off of the car for later adjustments. Your reservoir should be facing towards the rear of the car. Keep washer and nylock nuts together for final adjustments

### REAR SPRING ASSEMBLY

26. Assemble the rear shock with new tender spring on top
27. Install new spring dividers that is provided in your Spring Kit with the shorter end closest to the cross over ring (top of shock)
28. Install new main spring by rotating (clocking) the spring ends 180 degrees so they are on the opposite sides of the spring divider
29. Compress spring assembly, install spring perch and rock guard
30. Release spring tension from spring assembly
31. Repeat steps 26 - 30 for the opposite side

### REAR SHOCK INSTALL

32. Reinstall the rear shocks using your factory hardware that was saved from the disassembly. Do not tighten factory bolts yet, the shocks may have to come off of the car for later adjustments



# OFF-ROAD Installations



@MTSOFFROAD

TECH SUPPORT:  
(602) 272-5009  
INFO@MTSOFFROAD.COM

POLARIS  
**RZR**  
SPRING KIT

YEAR

2020 +

MODEL

XP PRO

SEAT

4

SHOCK TYPE

WALKER EVANS

## FINAL ADJUSTMENTS

33. Settle the car by driving it in reverse and then forward at least 15 feet, so the suspension can be settled into place
34. Find the axle angle using an angle finder

**Tech Tip:** Use your smartphone to measure the axle angle with the free easy to use mobile app called "Measure".

If you own an Android - you will need to download the "Measure" app.

If you own an iPhone - the "Measure" app should already be installed onto your mobile device



35. Your front and rear axles should measure to **12 - 13 degrees** (+ or - 1 degree). If your axle angle is less than **12 - 13 degrees** then increase the preload, if it is more than **12 - 13 degrees** then decrease the preload

**WARNING:** If your measurements do not meet the target axle angle, then your car will not perform properly

36. After the target axle angle has been met, tighten bolts utilizing factory hardware. You should not have any extra hardware left over at this point
37. Double check your work and enjoy the ride

TECH SUPPORT: INFO@MTSOFFROAD.COM | (602) 272-5009 | FOLLOW: @MTSOFFROAD