

230-SWTS-KRX 2020-2024 Kawasaki Teryx KRX1000 Turn Signal Kit with Horn

SSV WORKS, 201 N. Rice Ave Unit A, Oxnard, CA 93030 www.SSVworks.com | Phone: 818-991-1778 | Fax: 866-293-6751

WARRANTY INFORMATION:

ALL SWITCH Works Electronics are covered by a limited 1 year warranty against defects in material or workmanship. Contact SSV Works for further warranty information.



Please read and understand these instructions completely before installation to avoid possible injury, or damage to the accessory or vehicle.

FEATURES & BENEFITS:

- Left/Right Turn Signal with Automatic Canceling Feature
- Dedicated Horn Output
- License Plate Light Output
- Emergency Hazard Light Switch
- Direct plug in to the factory tail light connectors
- RGB Backlight Buttons
- Weather-Proof for Offroad Use
- Built-In Circuit Protection Detects Any Short Circuits, Over Current, Under Current and Low Voltage
- Programmable RGB Backlight Colors to Match the Dash Lights







SWITCH Works Tango2 Parts List



Tango2 Turn Signal Module



Tango2 Turn Signal Rocker Switch



Tango2 Turn Signal Main Harness [B-H3271]



Kawasaki KRX Rear Turn Signal Harness [B-H3112]



KRX Tail light/Turn Signal Adapter Kit [B-H3122]



Front Turn Signal Extension Harness (x2) [B-S2959]



Tango2 Front Turn Signal LED Lamps (x2) [B-H2813]




Horn Assembly, 500hz [A-SW-HRN]




Zip Ties (x10)



SWITCH Works TANGO2 Kawasaki Turn Signal Kit Wiring Diagram

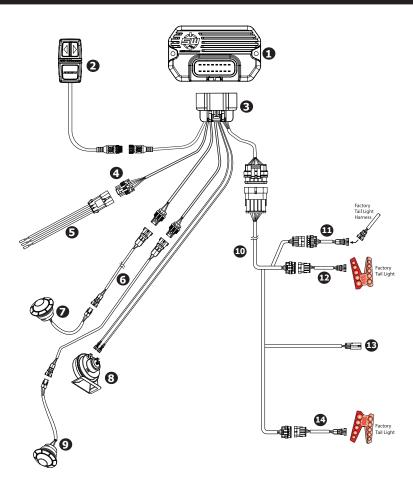

	Description	Part #
0	Tango2 Turn Signal Module	
0	Tango2 Turn Signal Rocker Switch	
6	Tango2 Turn Signal Main Harness	B-H2939
4	Power Connector to Busbar Pulse Connector	
6	Power Input Harness, 3 ft.	B-H3413
6	Front Turn Signal Extension Harness (x2)	B-H2959
0	LED Lamp (Front Right)	B-H2813
8	Tango2 Horn, 500 hz	B-SW-HRN-500
9	LED Lamp (Front Left)	B-H2813
10	Tango2 KRX Harness (to Rear)	B-H3205
1	KRX Tail Light Adapter "PASS INPUT"	B-H3122
Ð	KRX Tail Light/Turn Signal Adapter "PASS OUTPUT"	B-H3122
B	To License Plate Light	
1	KRX Tail Light/Turn Signal Adapter "DRIVER OUTPUT"	B-H3122

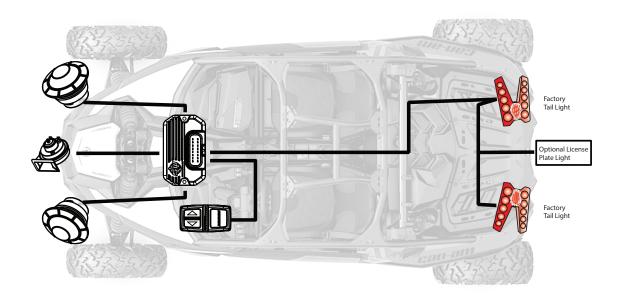



TOOLS NEEDED FOR INSTALLATION

- Drill

- Phillips Screw Driver

- 3/4" Hole Saw



A. Locate a suitable mounting location for the TANGO2 Turn Signal module. Secure the module to a panel using screws or zip tie it to a harness.



B. Use a vacant rocker switch mounting slot and insert the TANGO2 turn signal rocker switch. Run the cable towards the TANGO2 brain module.



C. Plug in the controller cable, front turn signal extension cables (B-H2959) and rear turn signal harness (B-H3112) to the TANGO2 main harness (B-H3271).





D. Route the front left and right turn signal extension cables to the front of the vehicle. Make sure to route the correct cable connector end that will plug to the LED lamp. Run the Horn power wires to the desired horn location.



E. Run the TANGO2 rear turn signal harness (B-H3205) to the rear of the vehicle. Use zip ties to secure the cable away from any moving parts or exhaust pipes.



F. Drill a 3/4" hole in the front of the vehicle for the front turn signal LED lamp. Refer to the viewing angle diagram on page 7 for proper turn signal LED lamp placement.



G. Insert the LED turn signal lamp into the hole and push in to lock in place. Repeat steps G and H for the other side.



H. Connect the front turn signal extension harness to the LED lamp.



I. Mount the supplied bracket to the horn. Run the horn cable towards the desired horn mounting location.






J. Horn mounting recommendations: 1. Mount away from moving parts; 2. Mount as high as possible; 3. Mount with the horn facing downward to protect from water damage.

Plug in the horn power wires. Either wire can connect to either terminal.



K. Run the KRX Rear Turn Signal Harness (B-H3112) to the rear of the vehicle. Begin installation on the passenger side tail light. Unplug the passenger tail light connector. See wiring image below for the passenger side connections.

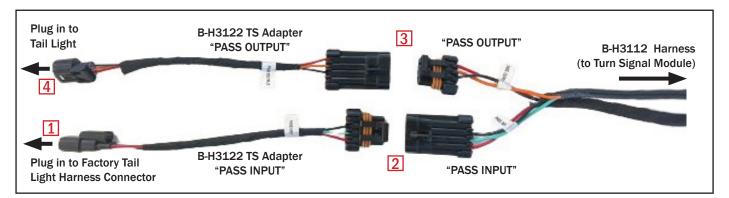

- 1 Unplug the factory KRX tail light connector and plug it in to the KRX TS Adapter (B-H3122) "PASS INPUT".
- 2 Plug the KRX TS Adapter (B-H3122) "PASS INPUT" to the "PASS INPUT" connector of the B-H3112 harness.
- 3 Plug the B-H3112 harness "PASS OUTPUT" connector to the other KRX TS Adapter (B-H3122) "PASS OUTPUT".
- 4 Plug the KRX TS Adapter (B-H3122) "PASS OUTPUT" connector to the tail light.



L. Run the "LIC. PLATE" connector towards the license plate location. Use zip ties to secure the cable away from any moving parts or the exhaust pipe.




M. Run the "DRIVER OUTPUT" of the B-H3112 harness to the driver side tail light. Unplug the factory tail light connector and plug in the provided dummy plug to protect it from the elements.






N. Plug in the KRX TS Adapter (B-H3122) to the B-H3112 "DRIVER OUTPUT" connector and plug the other end to the tail light. Use zip ties to secure the harnesses.

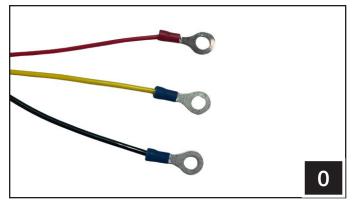


O. Crimp the ring terminals to the Power Input Harness (B-H3413).

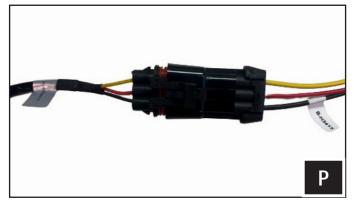

P. Plug the 3-pin connector of the Power Input Harnes (B-H3413) to the KRX Turn Signal Main harness (B-H3271).




Q. Run the BATT, ACC and GND wires of the Power Input Harness (B-H3413) to the factory busbar and screw in the ring terminals to the corresponding battery, Accessory and Ground studs.

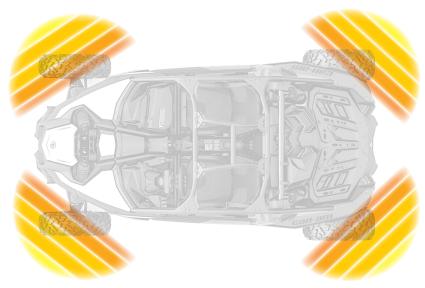

Turn Signal 180 Degree Viewing Angle



TURN SIGNAL ROCKER SWITCH FUNCTIONS

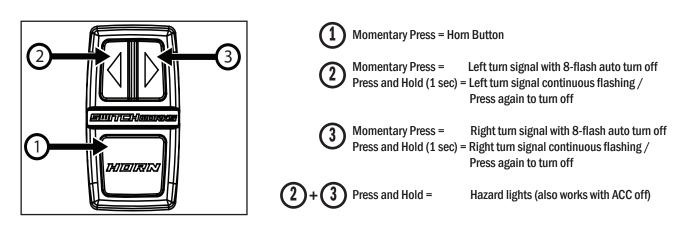

LED BACK LIGHT COLOR CHANGE



With ACC off, press and hold either the left or right button for 4 seconds until the rocker switch backlight turns bright. Use the left and right buttons to select the color. Press the horn button to save the color.

