



# MAP HDAXR-OCK

## Install Instructions



### What's in the box?

- (1) MAP Civic Type R Oil cooler mounting bracket (Upper and Lower)
- (1) MAP Civic Type R Oil cooler line kit (2 lines)
- (2) -8AN to -10ORB Fittings
- (2) 1/8NPT Alen Plug
- (2) -8AN to 1/8" NPT Adapters
- (1) MAP Oil Filter Adapter Plate
- (1) Setrab Oil Cooler
- (2) Setrab Oil Cooler to -10AN Fittings
- (8) M6x1.0x16 Hex Head Bolts
- (8) M6x1.0 Hex Nuts
- (4) M6 Threaded Plates
- (4) M6 Rubber isolators

# Tools needed



## You will need:

Push pin tool  
10mm socket (3/8ths)  
3/8ths ratchet  
24mm socket

# Step 1



Place vehicle on a lift or jack stands

# Step 2



Remove front bumper

# Step 3



Remove 4 bolts holding AC condenser  
in place

# Step 4



Assemble MAP FK8 Type R oil cooler as pictured, ensure you have rubber isolators on both sides of the brackets

# Step 5




Next, attach MAP FK8 Type R oil cooler to the vehicle by securing it to the radiator condenser, using the 4 10mm bolts you removed earlier.

# Step 6




Remove engine oil filter

# Step 7

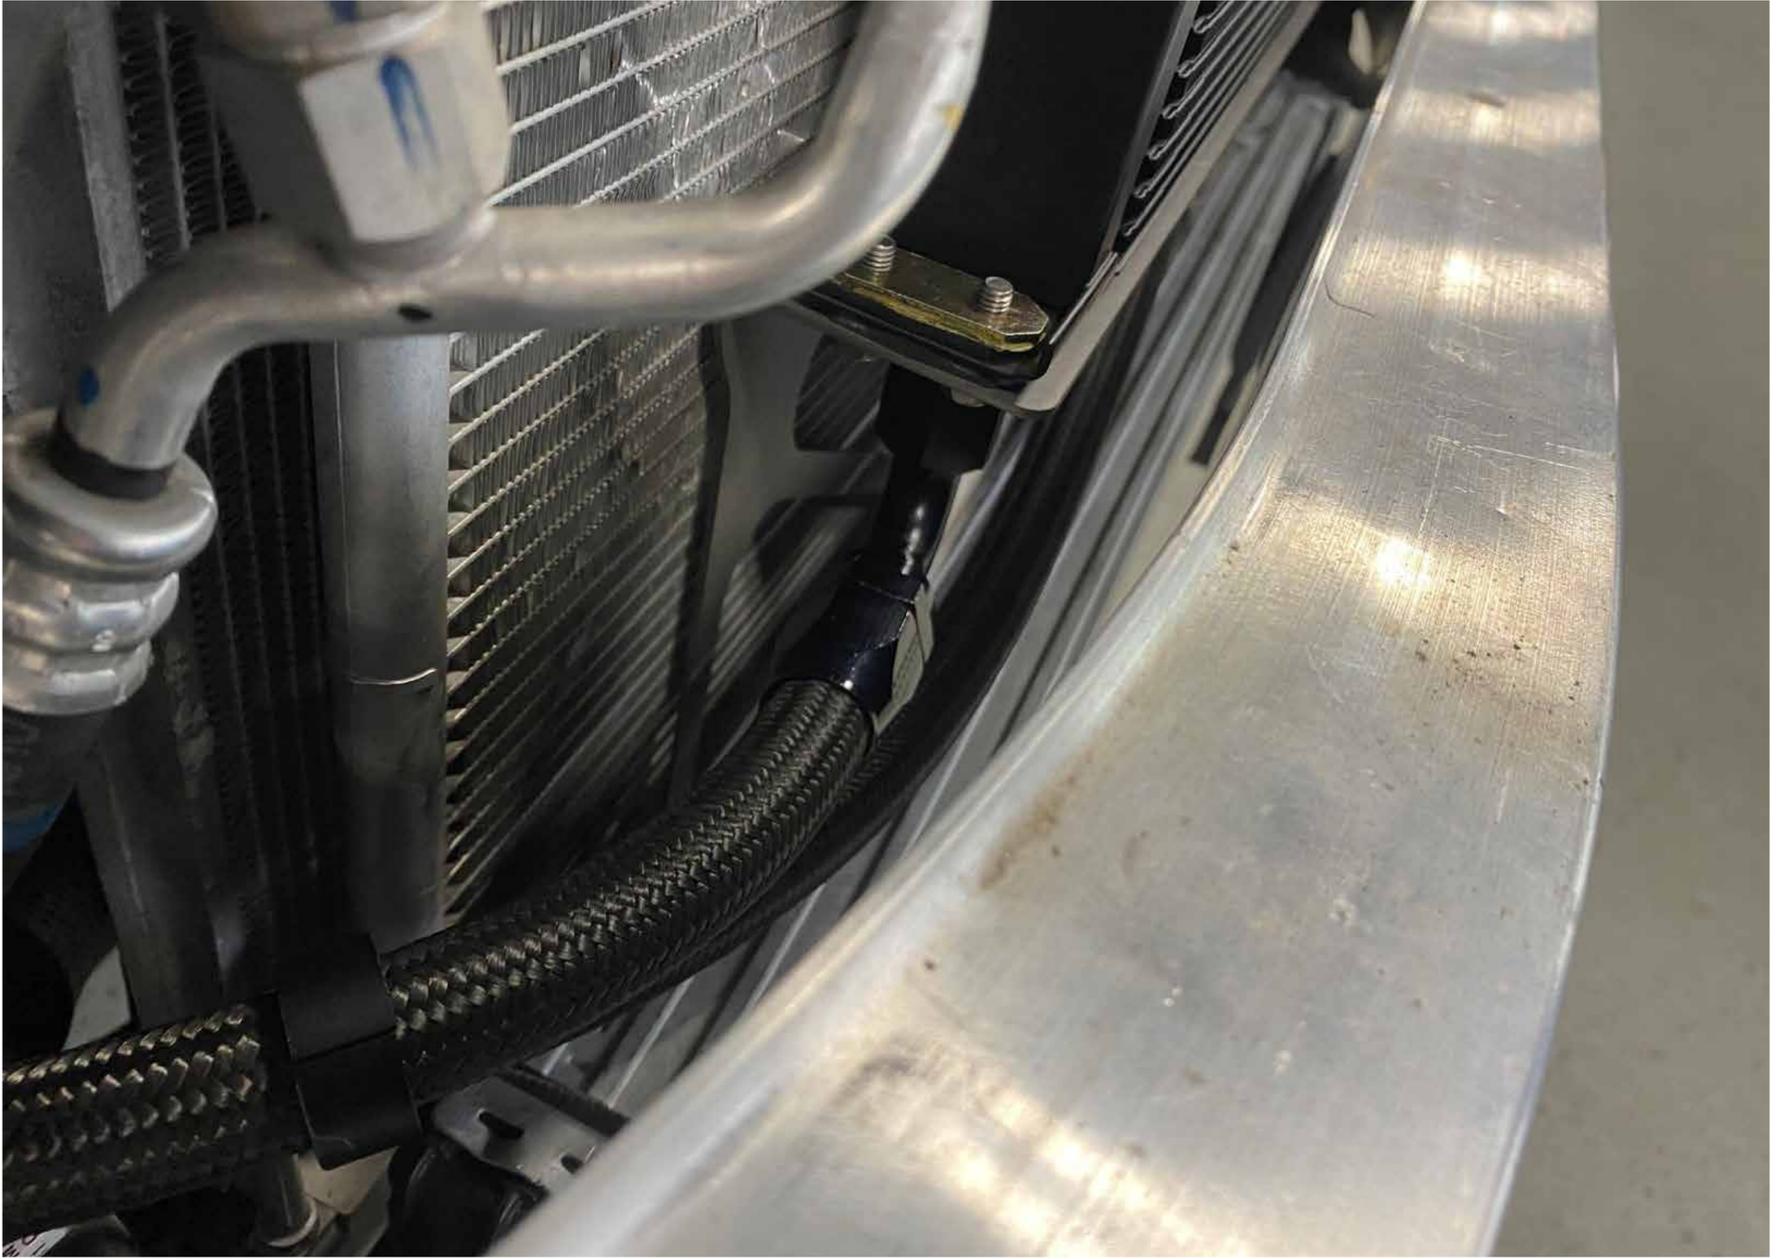

Install included oil sandwich, clock the inlet and outlet as pictured. Tighten to (ftlbs) reinstall oil filter when your finished

# Step 8

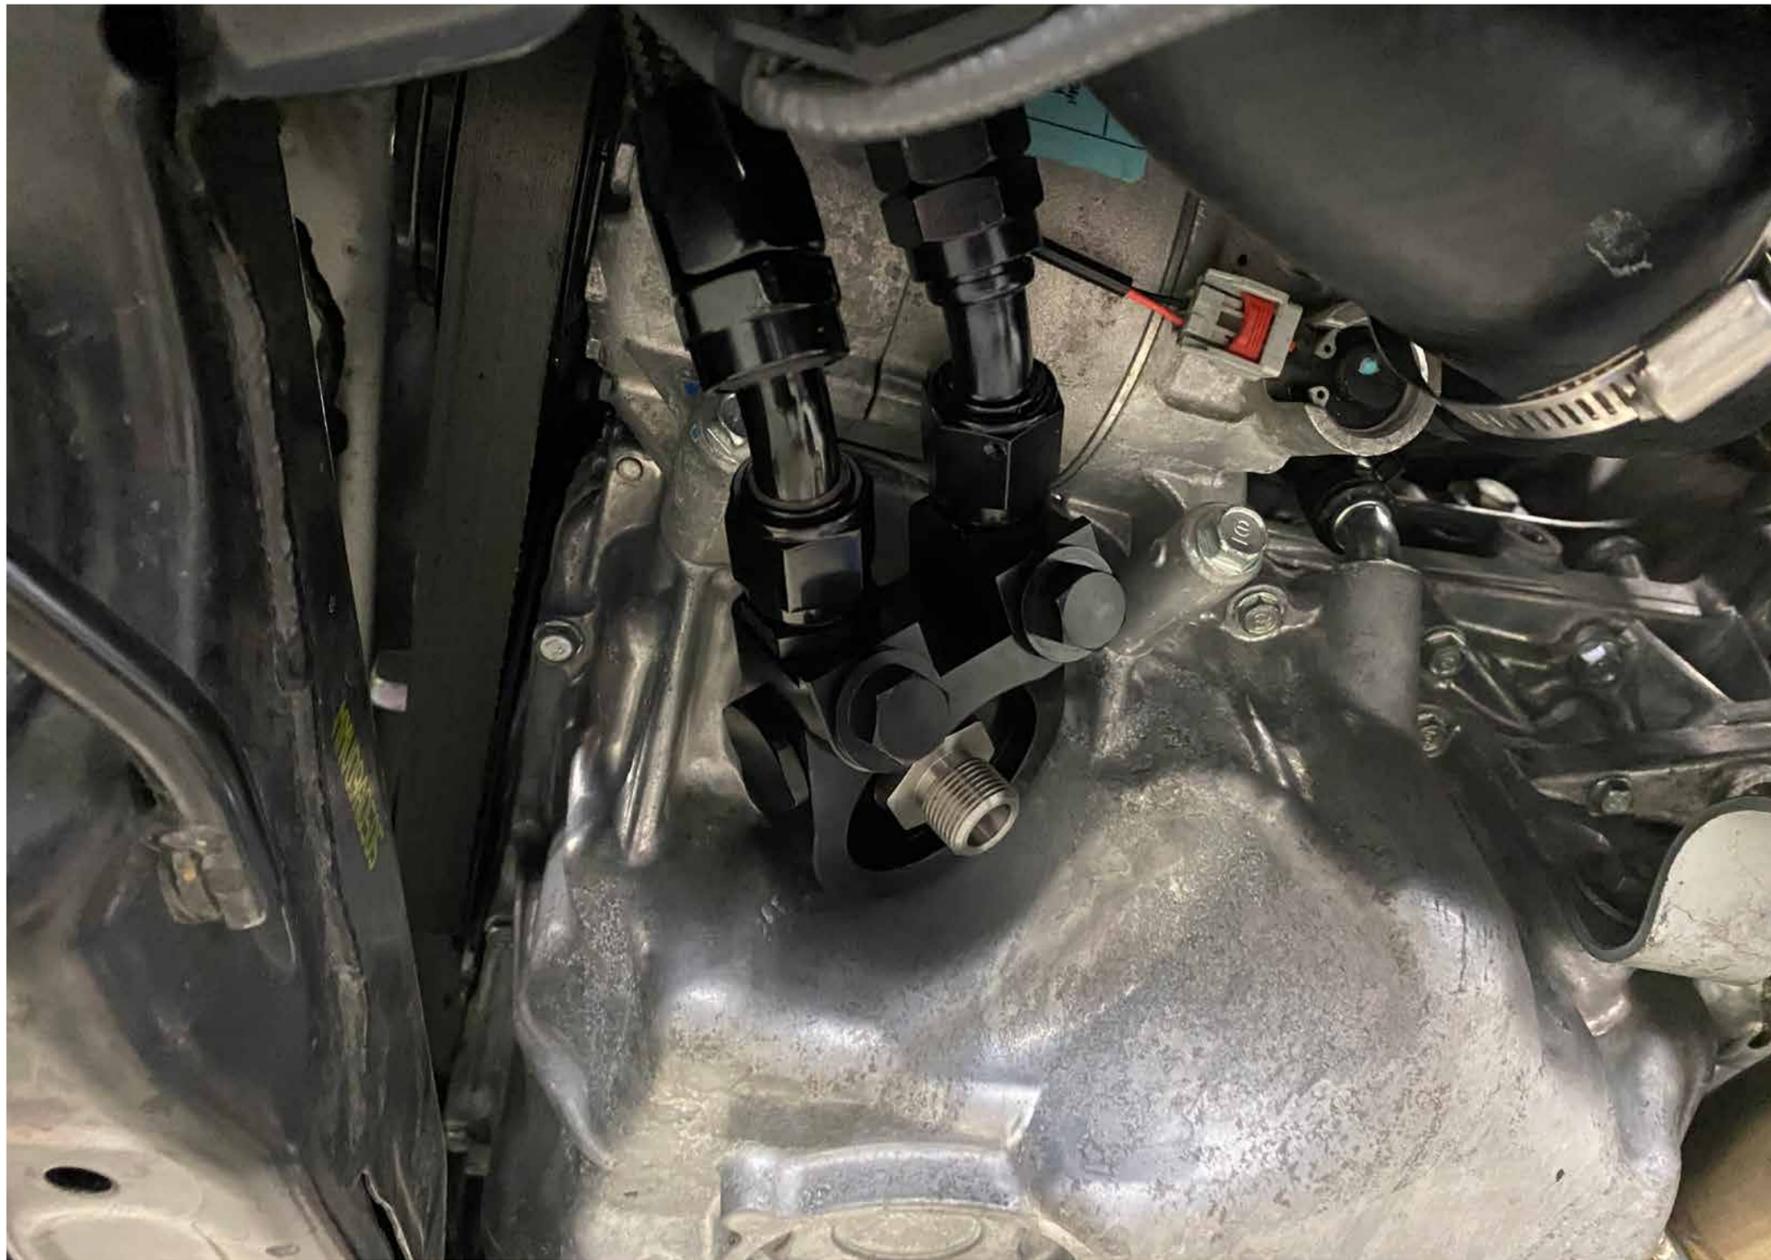


Thread AN Lines onto the oil cooler, longer line goes on drivers side and shorter line will go on passenger. Route as pictured and thread onto oil sandwich plate, once all lines are in place, tighten all fittings and hose ends.

# Step 9



Add 1 qt of oil, start check for leaks and adjust oil level if needed

# Step 10

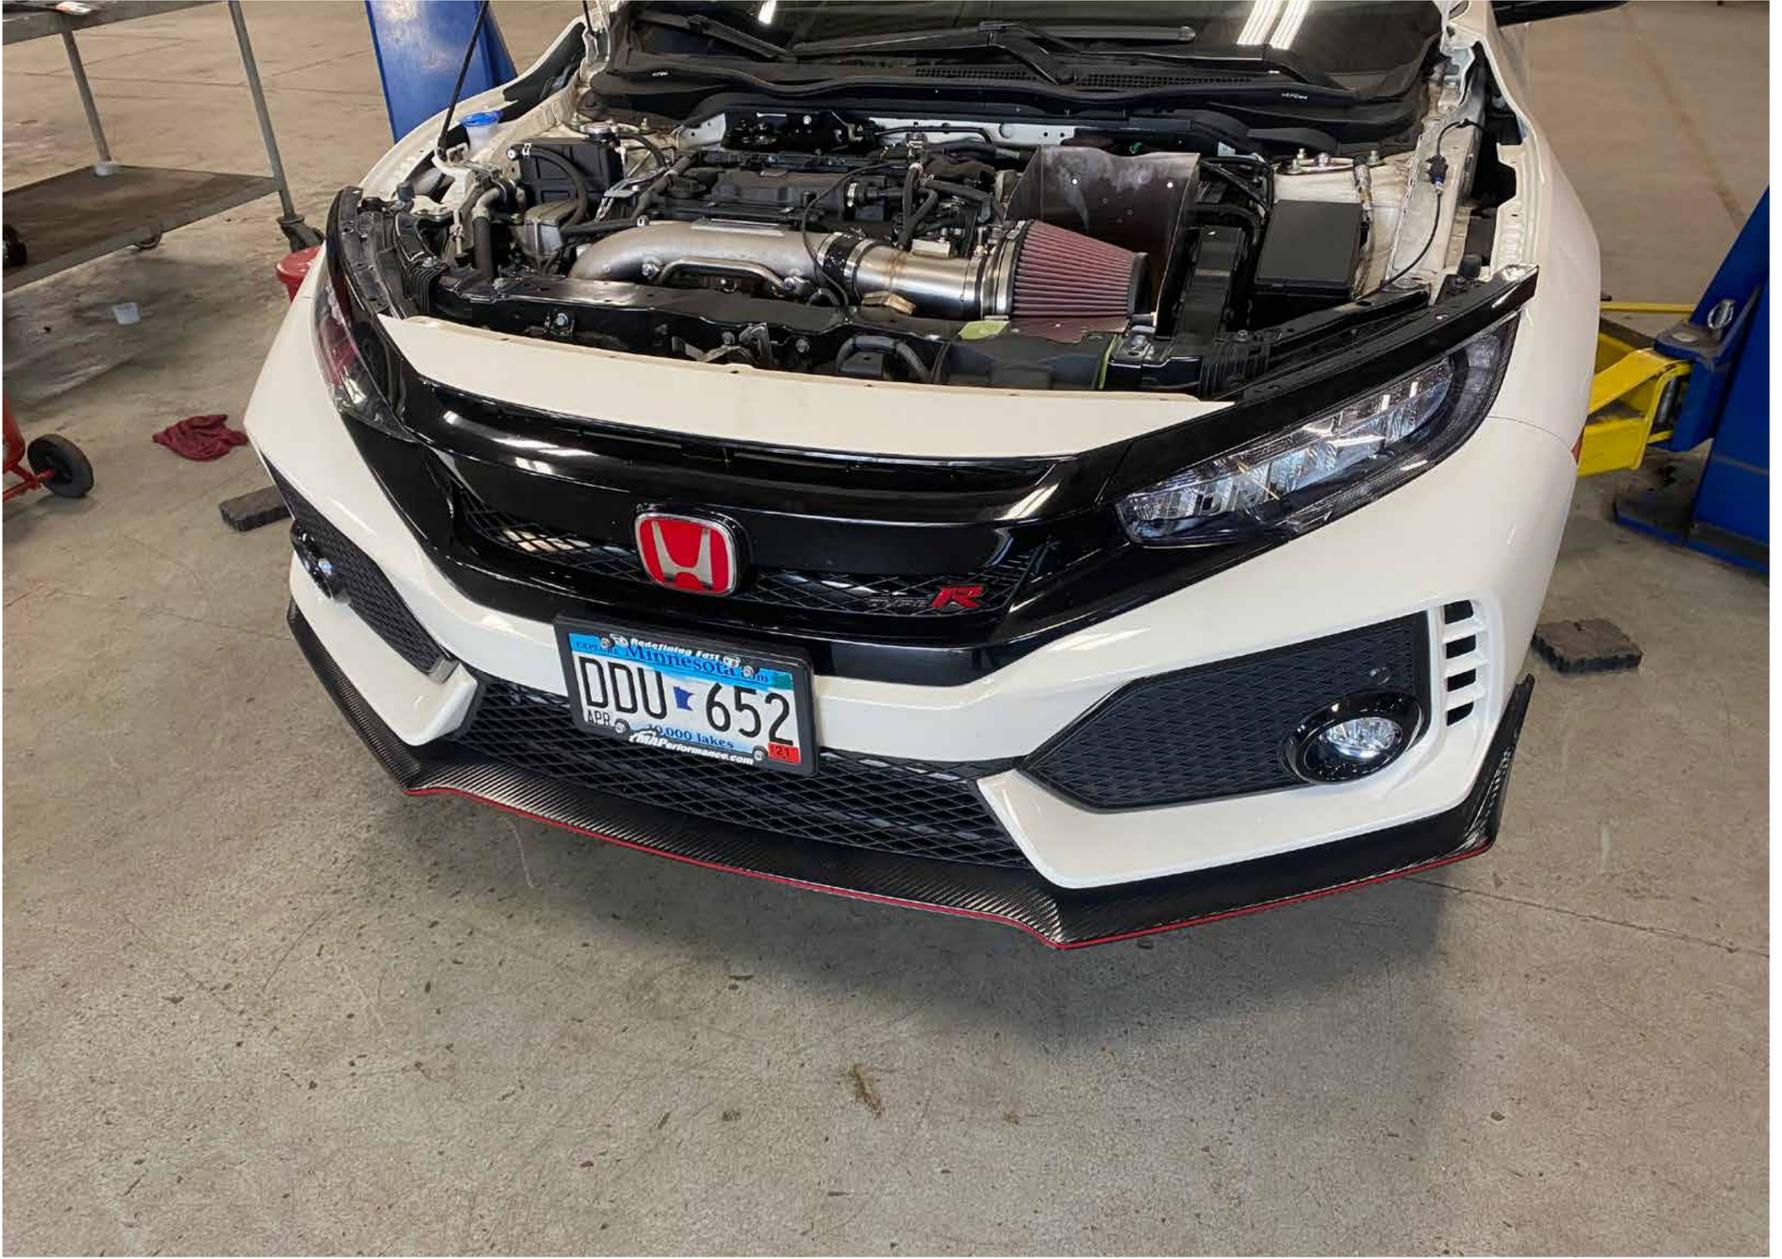


Reinstall bumper

We hope you enjoy your purchase! Reach out to us with any issues or concerns.



1-888-627-3736



@maperformance



support@maperformance.com



www.facebook.com/modernautomotiveperformance/

