






**INSTALLATION INSTRUCTIONS**  
**DASH BOARD BLOCK OFF PLATE W/ SWITCHES**  
**MAZDA MIATA NB 99-04**  
**P/N: 74315 & 74317**

1. Disconnect the battery before beginning installation
2. Remove the dash board bezel, radio and factory HVAC controls (if installing 74317) from the dashboard.
3. Insert all switches from the front and circuit breakers from the back into the switch panel.
4. After inserting the USB charger into the panel take the rectangular aluminum spacer and install it on the back side of the switch panel over the USB charger. This will make it more rigid once assembled.
5. Before mounting the panel in the dash, the cross braces will need to be cut out. Also note some trimming of the foam dash around the block off plate may be required (see Image below).
6. Using the supplied connectors, wire each switch to the accessory it will control. The use of 12 gauge wire is recommended (See wiring diagram below).
7. Apply the appropriate accessory label under each switch.
8. Install the Block off plate and reinstall the bezel to secure it in place.
9. Reconnect the battery

**Trimming along this edge may be required**

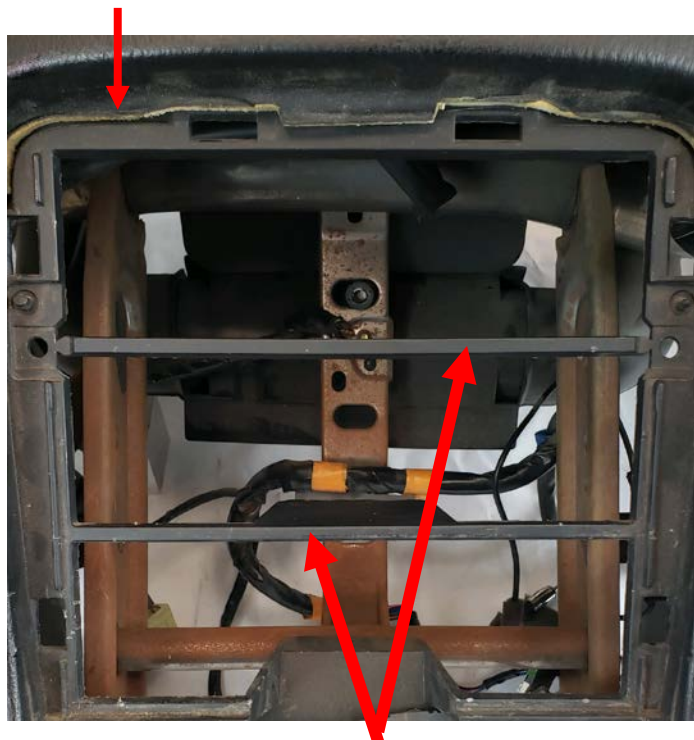

**Remove cross braces**

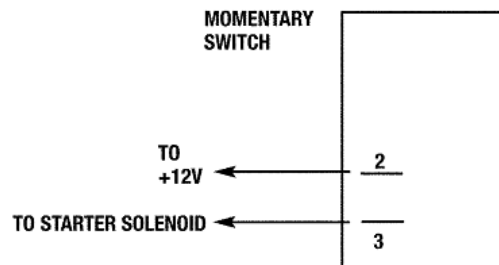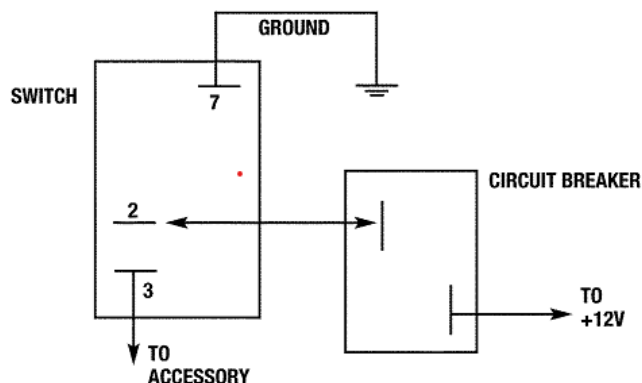

**For Technical Assistance, Call Moroso's Tech Line at  
(203) 458-0542, 458-0546 8:30am – 5:00pm Eastern Time**

MOROSO PERFORMANCE PRODUCTS, INC  
80 CARTER DR • GUILFORD, CT 06437-2116  
Phone: (203) 453-6571 • Fax: (203) 453-6906

REV.A  
082621

Visit Us At [www.moroso.com](http://www.moroso.com)

74317INST