


R-2150

**2010 & UP, FIFTH GENERATION CAMARO FIRE EXTINGUISHER MOUNT-
INSTALLATION INSTRUCTIONS**
Mounts on Passenger Side Manual Seat

1. Remove seat:
 - A. Lower Headrest
 - B. Lower seat to down position. Disconnect battery.
 - C. Slide seat all the way forward to expose rear bolts.
 - D. Remove the rear seat bolts. Note: Bolts have thread locker -- use a good T-50 socket to remove. They will be difficult the whole way out.
 - E. Tip the seat forward – Slide back (approximately 2 inches) and up to disengage front fingers.
 - F. Tilt seat back and unplug seat. (Pull side tab on connector to release plug)

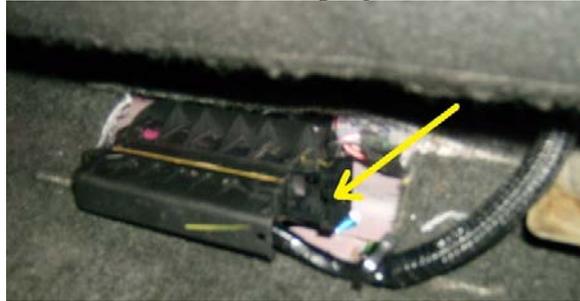

- G. Remove seat from car.

2. Lay the seat on its back and remove the two T-40 bolts at the front of the seat assembly that hold the slider rail to the seat frame. Insert the fire extinguisher mount between the two. Reinstall the bolts and tighten.



3. Reinstall Seat in car. Reconnect battery.

Performance driving events are by nature potentially hazardous to your health. Brey-Krause Mfg. Co. Inc. shall not be liable for injury, consequential, or other types of damages resulting from the use or misuse of our products. Proper installation of these parts is critical and should only be done by a professional shop.