




# INSTALLATION INSTRUCTIONS

Part Number: 85-0700

## EDELBROCK & CARTER SQUARE-BORE STUBSTACK®

Congratulations, you have just purchased the latest in airflow technology for your Edelbrock or Carter carburetor. This Dyno-tested K&N® Stubstack® was designed to increase the airflow of Edelbrock square-bore carburetors, by decreasing the restriction around the choke horn. This decreased restriction can add up to 25cfm to the rating of the carburetor. This is ideal when a carburetor is slightly too small for the engine, but installing a larger carburetor would result in the loss of low rpm torque.

In order to optimize the performance of the stubstack®, it is imperative that certain criteria be met. The stubstack® must be utilized with an open element K&N® air filter. If the air does not flow equally around the entire perimeter of the stubstack®, there will be uneven metering signals. The proper size air filter is also vital to the success of the stubstack®. The minimum air filter diameter is 11" and the minimum clearance above the stubstack is 2-1/2". The stubstack® will fit inside of most aftermarket air cleaner housings and slide snugly down over the the choke horn. The stubstack® **must** be held down securely to the carburetor with a jam nut. After the air filter has been properly sized, it will be necessary to recalibrate the fuel circuits on the carburetor to bring the air/fuel ratio into the proper range. A K&N® Air/Fuel Monitor is very helpful in measuring the A/F ratio for ease of re-calibration. See the current K&N® catalog for more information on Air/Fuel Monitors.

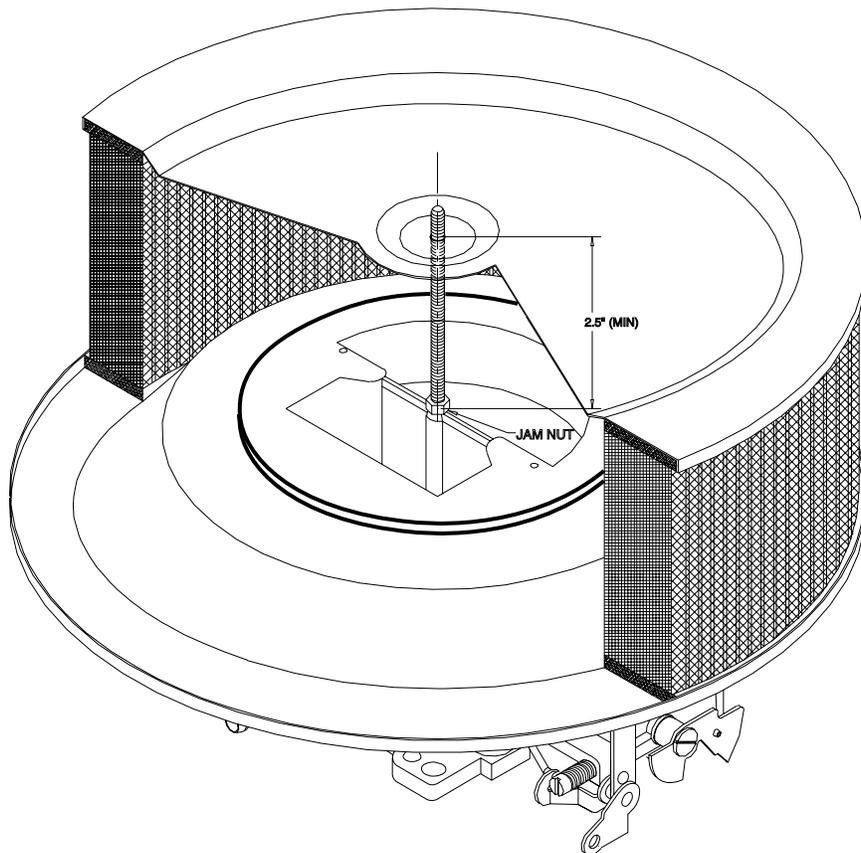

### Edelbrock carburetor list numbers for the 85-0700 stubstack

1400    1404    1405    1406    1407    1411