



INSTALLATION INSTRUCTIONS

Part Number: HA-1019

This filter fits: SEE CATALOG FOR CURRENT APPLICATIONS

* FREE K&N® decal To register your warranty, please see us online at knfilters.com/register. FREE K&N® decal *

Congratulations, you have purchased the finest air filter that money can buy. With proper care, this filter can last many seasons. This filter can be used in a stock machine, with no modifications required. If any engine modifications have been made tuning/jetting adjustments may be required. There are special installation instructions, so please follow the procedures outlined below to ensure the K&N® Filtercharger® seals properly.

If you need any assistance please call 1-800-858-3333 to speak with a representative in our Customer Service Center before returning the product.

INSTALLATION:

- 1) Locate airbox in vehicle. Refer to owner's manual for assistance
- 2) Un-clasp clips that hold the airbox cover Fig 1
- 3) Remove the screws that secure the filter into the airbox housing.

NOTE: Some screws are held captive into the filter frame. You may need to push the screw out from the back side Fig 2 & 3

The OE spacers from the stock air filter WILL NOT BE USED with your K&N® Air filter

- 4) Install the OE screws into the K&N air filter hole locations that have the captive feature. You will have to use some force to snap the screws in Fig 4 & 5
- 5) With the screws installed into the air filter, install filter into the airbox Fig 6
- 6) Install the remaining screws into the filter. Once you have each screw started tighten all of the screws securing the filter into place
- 7) Re-install airbox lid and secure clips.

THESE INSTRUCTIONS MUST BE FOLLOWED EVERY TIME THE FILTER IS SERVICED, OTHERWISE THE FILTER MAY NOT SEAL, AND DAMAGE TO THE ENGINE COULD RESULT.



Fig. 1

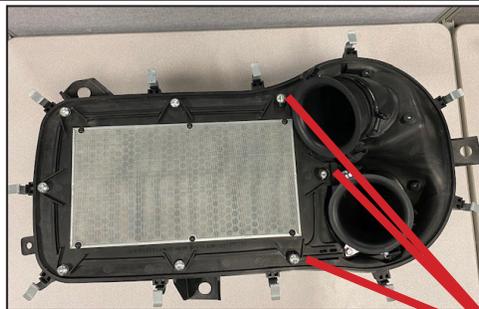


Fig. 2



Fig. 3

Captive Screws

Captive Screws



Fig. 4



Fig. 5



Fig. 6

CLEANING:

K&N® Engineering, Inc., suggests checking the air filter element periodically for excessive dirt build-up. Depending on your driving conditions, we recommend cleaning your air filter every 50,000 miles. To clean and re-oil, purchase our filter Recharger® service kit, part number 99-5050 or 99-5000 and follow the easy instructions.