



Steeda Focus ST/RS Clutch Spring Kit

Installation Instructions for Part #: 555-7028



1. Park your car on a flat surface and engage the emergency brake.
2. Depress the clutch pedal and remove the clutch spring assembly by unseating it from the bracket it is seated in. It may be easiest to push up on the lower spring bucket and push the assembly towards the center console. See Figure 1 for reference.
3. Once removed, clamp the spring in a vice as shown in Figure 2 just enough to hold it. Jerk upward on the lower spring bucket using your fingers. **NOTE: It may be helpful to wrap a thin cloth or towel to pad your fingers.**
4. Fit the blue spring adapter to the top spring perch, then the spring to the blue spring adapter.
5. Clip the top and bottom spring perch back together
6. Reinstall in the car.

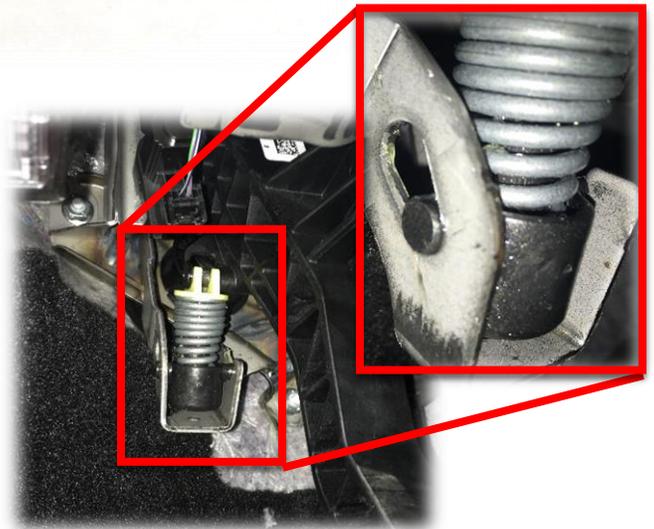


Figure 1



Figure 2