



H00L-X15.ID

15" SUBWOOFER DUAL 1Ω

Red Color Aluminum Basket

500 Oz High Strenght Ferrite Magnet

Large Foam Edge and Paper with Glass Fiber Cone

4" Black Aluminum 4 Layer Voice Coil

6 Layer Conex Spider

4000 Watts RMS Power


6000 Watts MAX Power

Impedance 1Ω + 1Ω

Sensitivity 85.8 dB

Frequency Response 34 - 1.2 KHz

SPL vs. FREQ

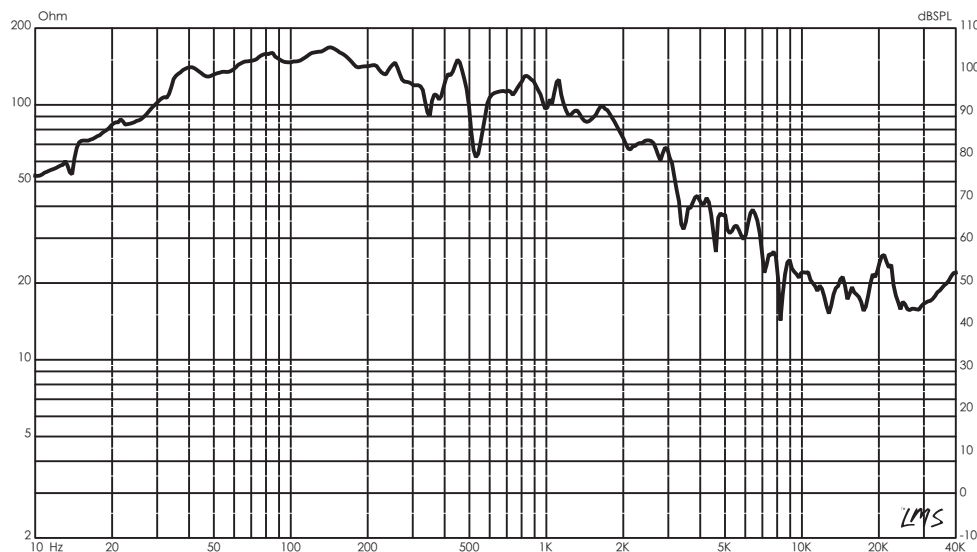


H00L-X15.ID

15" SUBWOOFER 1+1 OHMS



OWNER'S MANUAL

#WE LIKE IT LOUD



HOOL-X15.ID

15" SUBWOOFER 1+1 OHMS

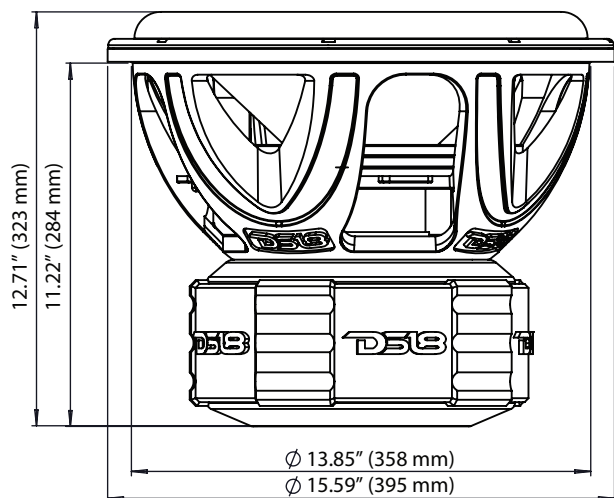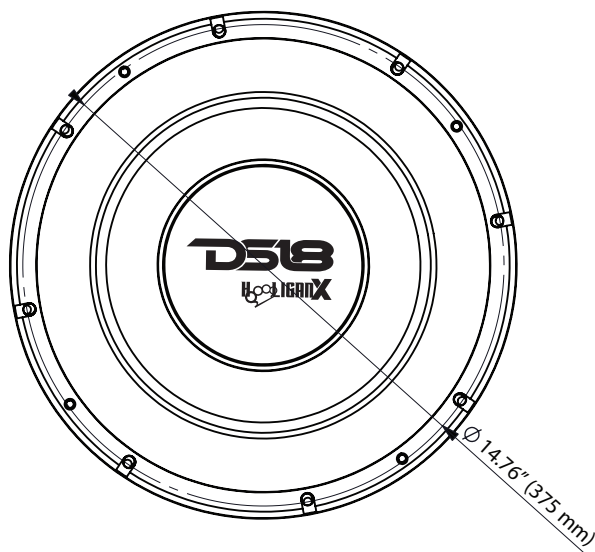

WE LIKE IT LOUD

HOOL-X15.ID 15" SUBWOOFER 1+1 OHMS

Data Sheet



Specifications

Nominal Diameter	15"
Nominal Impedance	1Ω + 1Ω
RMS Power	4000 Watts
MAX Power Handling	6000 Watts
Sensitivity (1w/1m)	85.8 dB
Frequency Response	34-1.2KHz
Recommended Lo Pass Crossover	80 Hz
Voice Coil Diameter	4" (99.8 mm)
Voice Coil Former Material	BLACK ALUMINUM
Winding Material	CCAW
Basket Material	ALUMINUM
Frame Material	ALUMINUM
Magnet Material	Ferrite
Magnet Weight	500 Oz

Thiele & Small Parameters

Equivalent Volume	Vas	52.83 L
Excursion	Xmax	59 mm
Free Air Resonance	Fs	30.28 Hz
Mechanical Factor	Qms	3.984
Electrical Factor	Qes	0.605
Total Factor	Qts	0.525
Cone Area	Sd	754.77cm ²
Mechanical Mass	Mms	460.33 g
Bl Factor	Bl	9.12
Dc Resistance	Re	0.57 ohms
Inductance	Le	0.573 mH
Mechanical Compliance	Cms	0.60 mm/N

Measurements

Overall Diameter	15.59" (395 mm)
Front Mount Baffle Cutout	13.85" (358 mm)
Mounting Depth	11.22" (284 mm)
Overall Depth	12.71" (323 mm)
Net Weight	37KG

Shipping Info

Gross Single Unit Weight	41 Kg
Single Unit Box Dimensions W x L x H	420 x 420 x 365 mm
Quantity of Units in Master Carton	1PCS
Gross Master Carton Weight	43 Kg
Master Carton Dimensions W x L x H	435 x 435 x 385 mm