



RUST BUSTER

RB7130R & RB7130L
Front Center Frame Section
2005-2015 Toyota Tacoma Access/Crew Cab



REQUIRED TOOLS

Jack Stands or Lift
Mig Welder
Paint/Primer
Hand Grinder
Cutting Wheel or Torch
Welding Gloves
Welding Hood/Shield
Ear & Eye Protection
Fire Extinguisher
C-Clamp

KIT CONTAINS

Front Center Frame Section

QTY

1



RUST BUSTER

**RB7130R & RB7130L
Front Center Frame Section
2005-2015 Toyota Tacoma Access/Crew Cab**

1) **PREPARING YOUR VEHICLE**

Begin by disconnecting your battery prior to starting your installation.

Inspect your vehicle for leaking fuel lines, fuel tank and engine components. If you have fuel leaks repair all leaks prior to starting your installation. If your fuel tank is near your welding area **remove your tank prior to welding.**

Remove all combustible items above the work area such as seats, carpets, padding, etc.

Keep all flammable materials away from the vehicle work area.

2) **PREPARING YOUR WORKSTATION**

Keep a fire extinguisher close by in the case of fire and make sure you always have a designated "Fire Watch" to assist during the cutting or welding phases.

Abide by all apprenticed welding safety standards and practices.

Always use appropriate welding eye protection, ear protection, and work and fire safety gloves during the installation and within the work area.



WARNING!

If you are unsure on how to perform the installation or how to operate any of the required tools listed above, it is **HIGHLY** advised that you enlist the work of a certified welder/installer.

Failure to follow proper safety precautions and instructions may result in serious injury. **The user assumes all liability when installing the product.**



RUST BUSTER


RB7130R & RB7130L Front Center Frame Section 2005-2015 Toyota Tacoma Access/Crew Cab

3) PREPARING FOR YOUR INSTALL

Move any lines and power harness from the work area.

4) CUT

Our part features a perforated plate that, when removed, it allows the part to go around your transmission crossmember. This is used in shipping to prevent the part from puncturing its shipping box. Before installing, cut and remove it.

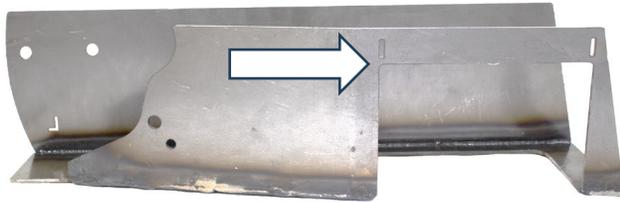

Grind the work area free of rust and debris, revealing bare metal/ followed by coating the work area with a weld through primer to help prevent against further rust development.

Push the part onto the frame while using the frame holes to help with alignment.



5) WELD

C-clamp and tac weld the part into place and verify its alignment.

Remove any potential fire hazards from the work area. Following proper welding procedures, tack weld the part onto the frame before welding it on fully. Weld 100% around all edges.





RUST BUSTER

RB7130R & RB7130L Front Center Frame Section 2005-2015 Toyota Tacoma Access/Crew Cab

6) PAINT AND PROTECT

Coat the part and work area with a primer or other rust inhibitor to help prevent or reduce the risk of rust formation.



We recommend our Rust Buster Rust Converter & Primer Spray Paint (RB9917).



Reinstall lines and power harnesses.