

Before you begin, read these instructions and check to be sure all parts and tools are accounted for. Please retain these installation instructions for future reference and parts ordering information.

**Kit Components:**

Qty.	Part Description
1	Windshield
4	Flat Head Screws
2	Large well nuts and screws
4	Washer Spacers

**Tools required for installation:**

T-25 Torx screw driver  
Phillips Screw driver



PowerMadd Cobra windshields install differently than your stock windshield. We mount the shield directly to dash which gives it more stability and strength. Using this method eliminates the need for an outer trim piece.

**INSTALLATION INSTRUCTIONS**

1. Remove the stock windshield. Some larger shields may have darts in the side of the dash, gently pull these out first, then pull up on the outer trim and the windshield popping the darts out of the three rubber grommets in the dash.
2. Remove the four dash screws from the dash using a T-25 Torx screw driver (Figure 1). These will be the mounting points for your new windshield.
3. Remove the three rubber grommets from the dash (Figure 2) – this allows the Cobra shield to lay flat against the dash.
4. If your stock shield had side darts, remove the front most grommet on each side (closest to the headlight). Install the provided well nut into the shield first then through the two holes in the dash (Figure 3).
5. Install the Cobra windshield to your machine by using the 4 flat head screws and washer spacers provided. The washer spacers go between the dash and the windshield. Loosely install each screw. Verify alignment then tighten all four front screws.
6. Save the stock screws and grommets with your stock shield in case you ever want to reinstall it.



Figure 1  
Remove the four dash screws.



Figure 2  
Remove the three grommets.

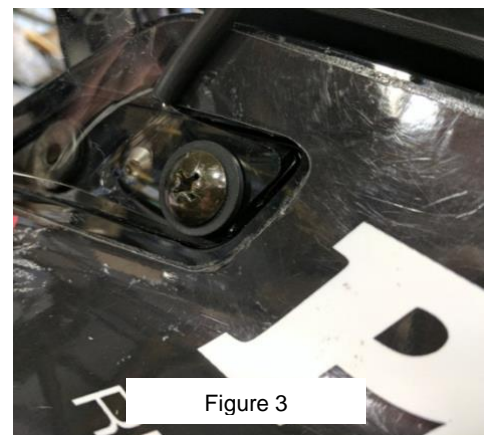


Figure 3

**LIMITED WARRANTY**

**POWERMADD** warrants this product to be free from defects in material and workmanship under use for the purpose it was intended. **POWERMADD** shall not be liable for damage or injury caused by defective materials or workmanship. **POWERMADD** may elect to repair or replace this product, but is the sole judge of any defects in their product. This warranty does not cover any labor costs to remove or reinstall this product and is effect for one year from the original purchase date.