



**Toyota 2024-2025 Land Cruiser M1R Strut**


**Thank you for choosing Rough Country for all your vehicle needs.**

Please read instructions before beginning installation. Check the kit hardware against the kit contents shown below. Be sure you have all needed parts and know where they go.

If question exist, please call us @1-800-222-7023. We will be happy to answer any questions concerning this product. Check all fasteners for proper torque. Check to ensure for adequate clearance between all components. Periodically check all hardware for tightness.

**Kit Contents:**  
Struts x2

**Hardware Included:**  
Nuts x6

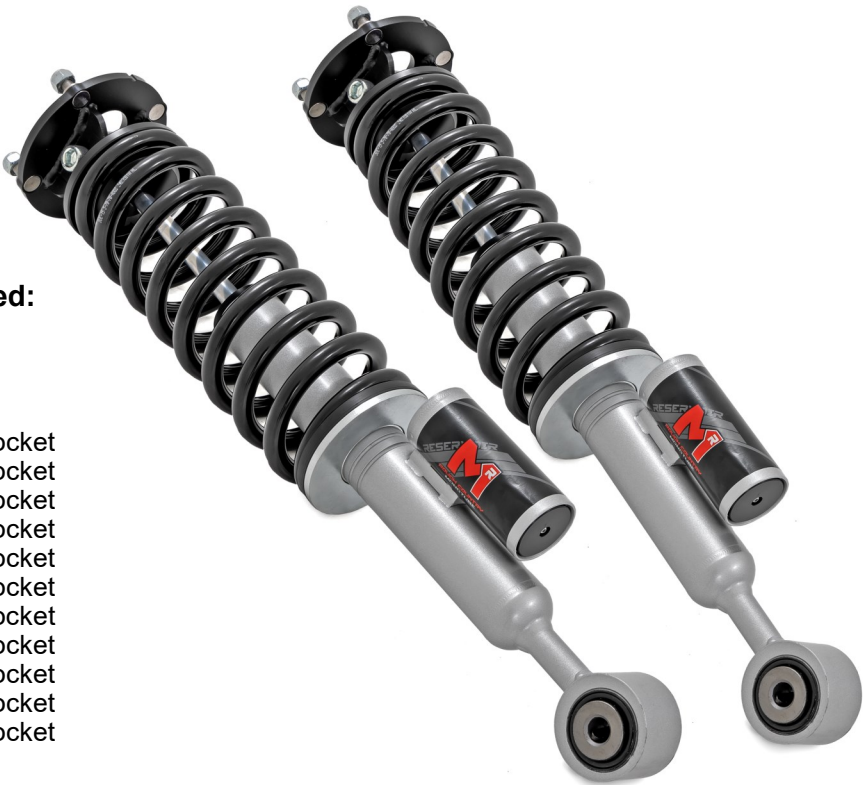

**Tools Needed:**

- Hammer
- Pliers
- Jack
- Jack Stands
- 10mm Wrench or Socket
- 12mm Wrench or Socket
- 14mm Wrench or Socket
- 15mm Wrench or Socket
- 16mm Wrench or Socket
- 17mm Wrench or Socket
- 18mm Wrench or Socket
- 19mm Wrench or Socket
- 22mm Wrench or Socket
- 24mm Wrench or Socket
- 36mm Wrench or Socket



**Torque Specs:**

Size	Grade 5	Grade 8	Size	Class 8.8	Class 10.9
5/16"	15 ft/lbs	20ft/lbs	6MM	5ft/lbs	9ft/lbs
3/8"	30 ft/lbs	35ft/lbs	8MM	18ft/lbs	23ft/lbs
7/16"	45 ft/lbs	60ft/lbs	10MM	32ft/lbs	45ft/lbs
1/2"	65 ft/lbs	90ft/lbs	12MM	55ft/lbs	75ft/lbs
9/16"	95 ft/lbs	130ft/lbs	14MM	85ft/lbs	120ft/lbs
5/8"	135ft/lbs	175ft/lbs	16MM	130ft/lbs	165ft/lbs
3/4"	185ft/lbs	280ft/lbs	18MM	170ft/lbs	240ft/lbs





## FRONT INSTALLATION



1. Jack up the front of the vehicle and support the vehicle with jack stands, so that the front wheels are off the ground.
2. Remove the front tires/wheels using a 21mm deep well socket.
3. Remove the cotter pin from the tie-rod end with a pair of pliers. Retain hardware for reuse. **See Photo 1.**
4. Loosen, but do not fully remove the castle nut with a 24mm socket. Strike the steering knuckle where the tie-rod end is with a hammer to release the taper. Finish removing the castle nut. Retain hardware for reuse. **See Photo 2.**

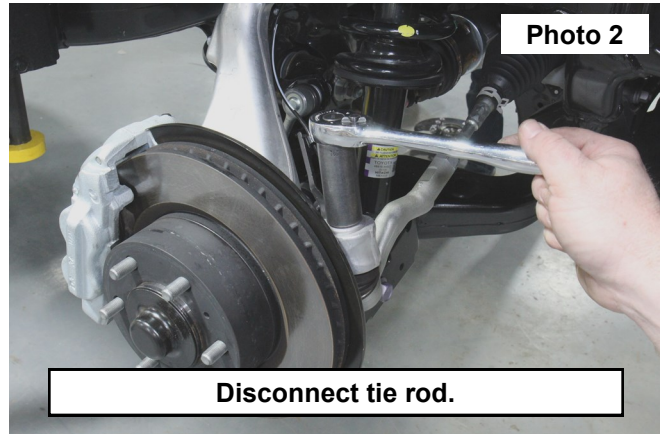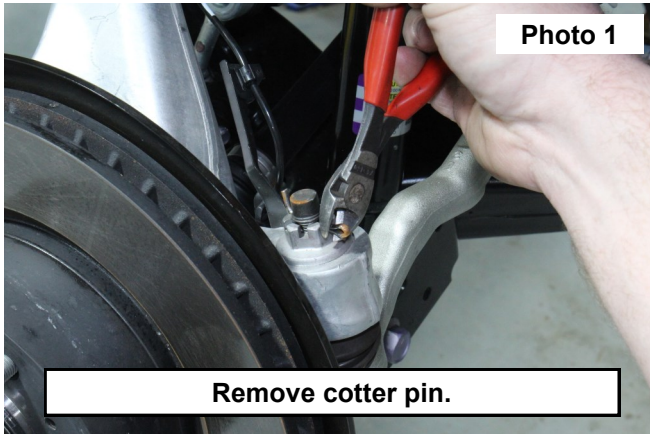

5. Remove the ABS wires from the upper control arm and steering knuckle using a 12mm wrench. Retain hardware for reuse. **See Photo 3 and Photo 4.**

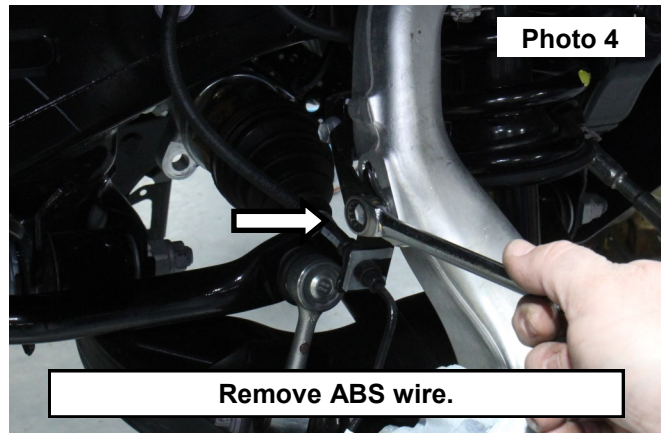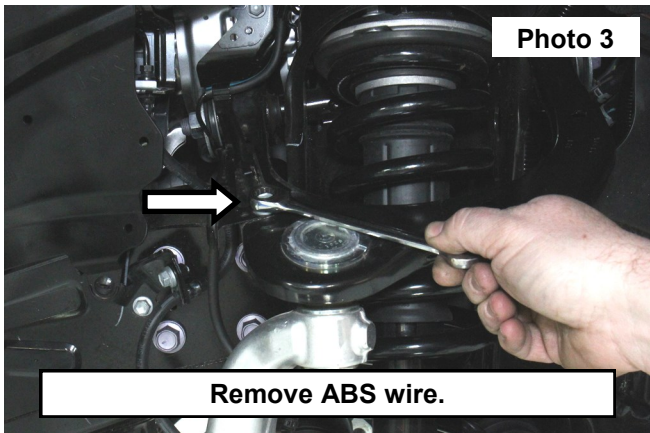


6. Remove ABS sensor from knuckle using a 10mm wrench. Retain hardware for reuse. **See Photo 5.**
7. Use a 19mm socket to remove the bolts holding the brake caliper to the knuckle. Hang brake caliper out of the way. Retain hardware for reuse. **See Photo 6.**

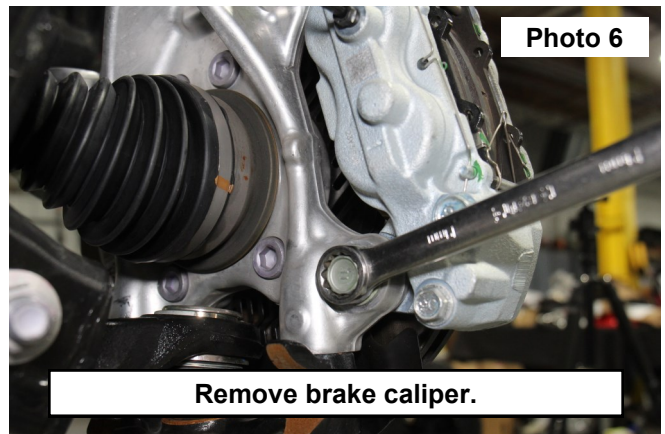
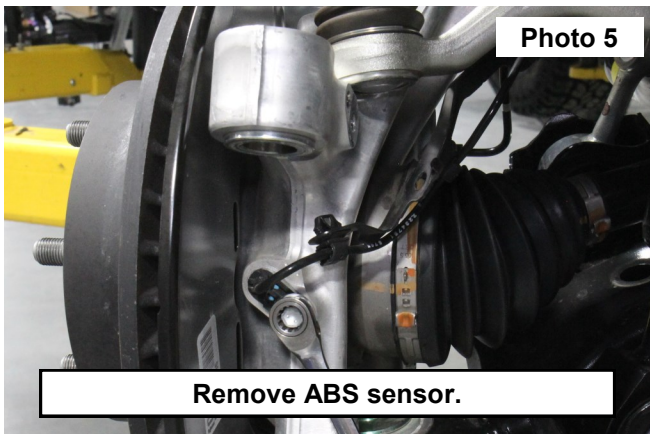






8. Remove the dust cover from the hub bearing with a pry tool and use a 36mm socket to remove the axle nut. Retain hardware for reuse. **See Photo 7.**
9. Remove the cotter pin from the upper ball joint nut and use a 19mm socket to loosen, but not remove the nut. Use a hammer to release the upper ball joint taper. Remove the nut. Retain hardware for reuse. **See Photo 8.**

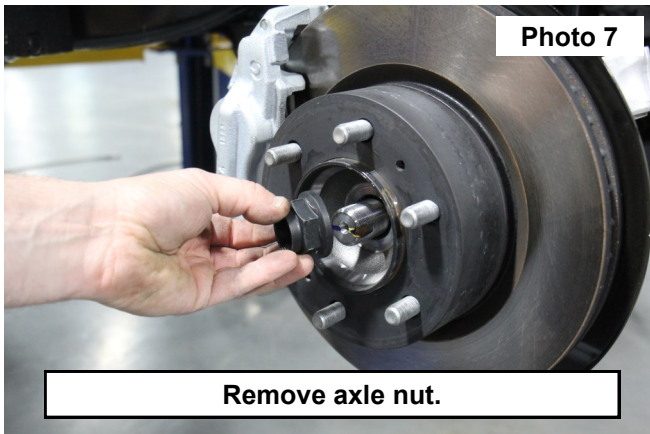



10. Remove lower strut bolt using a 22mm socket. Retain hardware for reuse. **See Photo 9.**
11. Use a 22mm socket to remove the factory bolts holding the lower ball joint housing to the steering knuckle. Retain hardware for reuse. **See Photo 10.**

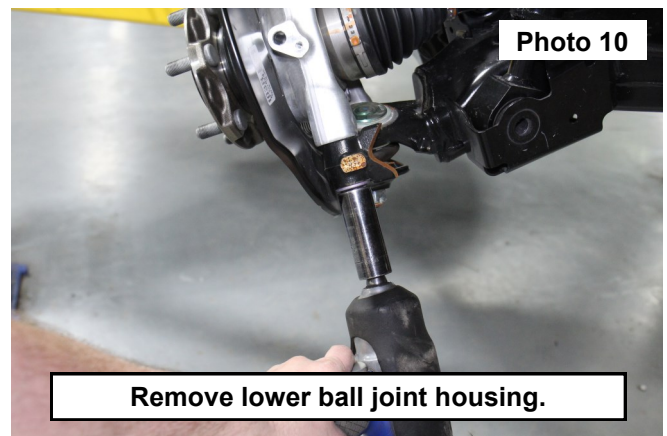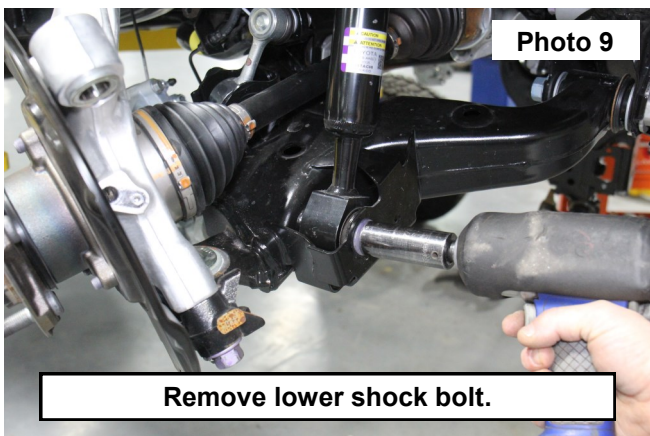


12. Remove sway bar link from the lower control arm with a 19mm socket. Retain hardware for reuse. **See Photo 11.**
13. Loosen, but do not remove, the lower control arm bolts using a 24mm wrench. Swing lower control arm out of the way.
14. Remove upper strut nuts using a 14mm wrench. Retain hardware for reuse. **See Photo 12.**
15. Remove strut from vehicle.
16. If upper control arms or any other accessory's are to be installed, do so at this time.

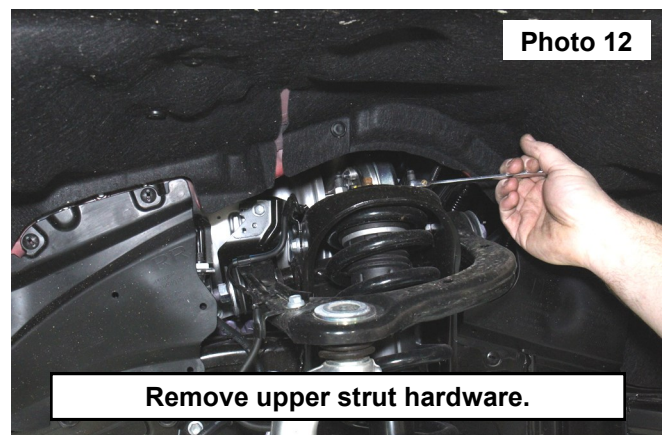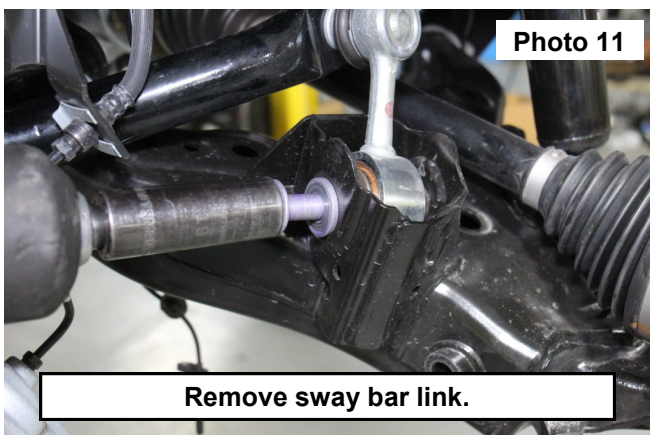

17. Install the new strut into the upper mount, the strut reservoir orientation is toward the wheel. **See Photo 13.** Passenger's Side shown.
18. Secure the upper strut mount using (3) of the supplied nuts. **See Photo 14.**

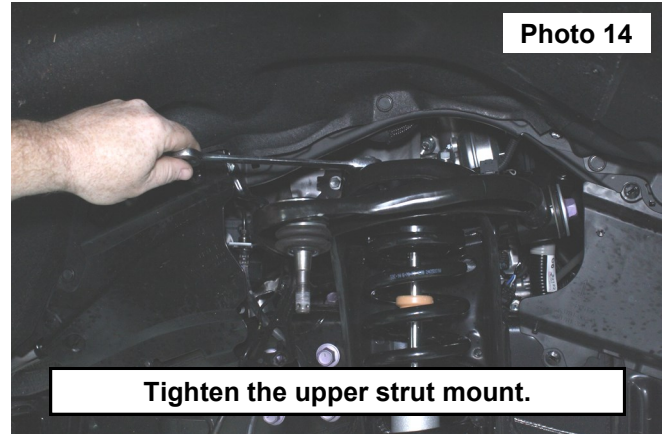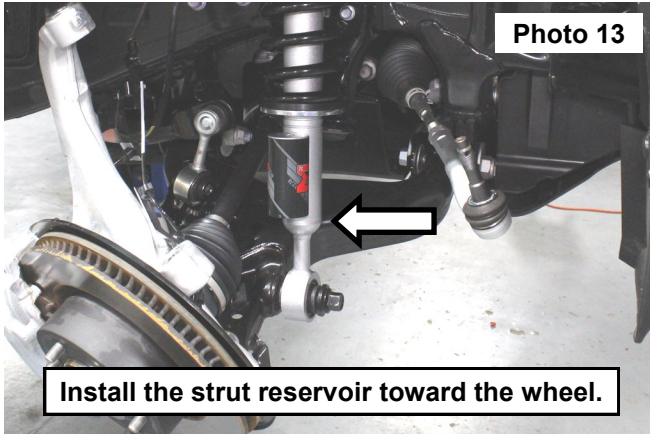

19. Raise the lower control arm to capture the lower strut mount. Secure the strut using the OE bolt. This bolt should be tightened once the vehicle is on the ground. **See Photo 15.**
20. Reverse steps 1-13 to complete the install. **See Photo 16.**
21. Install the wheels and tires onto the vehicle and lower onto the ground.
22. Tighten the lower control arm bolts using a 24mm wrench and the lower strut bolt using a 22mm socket.

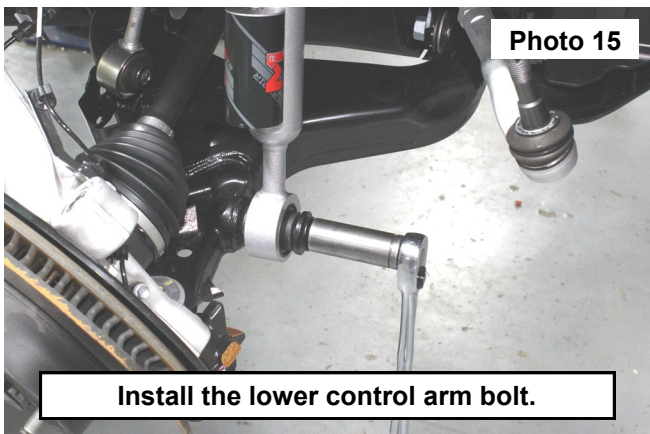

By purchasing any item sold by Rough Country, LLC, the buyer expressly warrants that he/she is in compliance with all applicable, State, and Local laws and regulations regarding the purchase, ownership, and use of the item. It shall be the buyers responsibility to comply with all Federal, State and Local laws governing the sales of any items listed, illustrated or sold. The buyer expressly agrees to indemnify and hold harmless Rough Country, LLC for all claims resulting directly or indirectly from the purchase, ownership, or use of the items.

